



Roxtec HD BG™ 穿隔系统

用于接地的高电缆密度穿隔系统。

Roxtec HD BG™ 电缆穿隔系统可用于在恶劣和危险环境中对铠装和金属包覆电缆进行密封和接地。对于该电缆穿隔系统，每个开孔最多允许有 72 根电缆。它带有 316L 不锈钢框架以及可灵活适配各种电缆规格的 Roxtec BG™ 密封模块。



- 防啮齿动物
- 耐腐蚀
- 轻型
- 节省空间
- 允许使用预端接电缆

产品特性



IP/UL NEMA



电气安全

安装结构



箱柜和机柜

等级和证书

密封性

- 符合 IEC 60529 标准 IP 66/67 防护等级, UL/NEMA 4,4X,12,13

支持

- 连接和接地

框架尺寸


mm/kg

下方的不同框架只是部分选择。要了解全部的框架和配置，请访问 [roxtec.com](https://www.roxtec.com)。


标题	框架开口	密封空间	外部尺寸 WxHxD	开孔尺寸 w x h	重量	产品编号
HD 16 FRAME ASSEMBLY AISI 316	1	40 x 160	83.8 x 236 x 60	64(+1/-0.5) x 216(+1/-0.5)	1.6	193084
HD 72 FRAME ASSEMBLY AISI316	2	80 x 180	225 x 281 x 77	208(+1/-0.5) x 264(+1/-0.5)	5.4	231782
HD 32 FRAME ASSEMBLY AISI316	2	40 x 160	130 x 236 x 60	110(+1/-0.5) x 216(+1/-0.5)	2.3	109238

密封组件数据

密封组件



CM BG™ 盲堵模块



Multidiameter™ 多径 CM BG™ 模块




润滑脂

如需了解详细信息，请访问 [roxtec.com](https://www.roxtec.com)。



预装配的穿隔套件

mm/kg

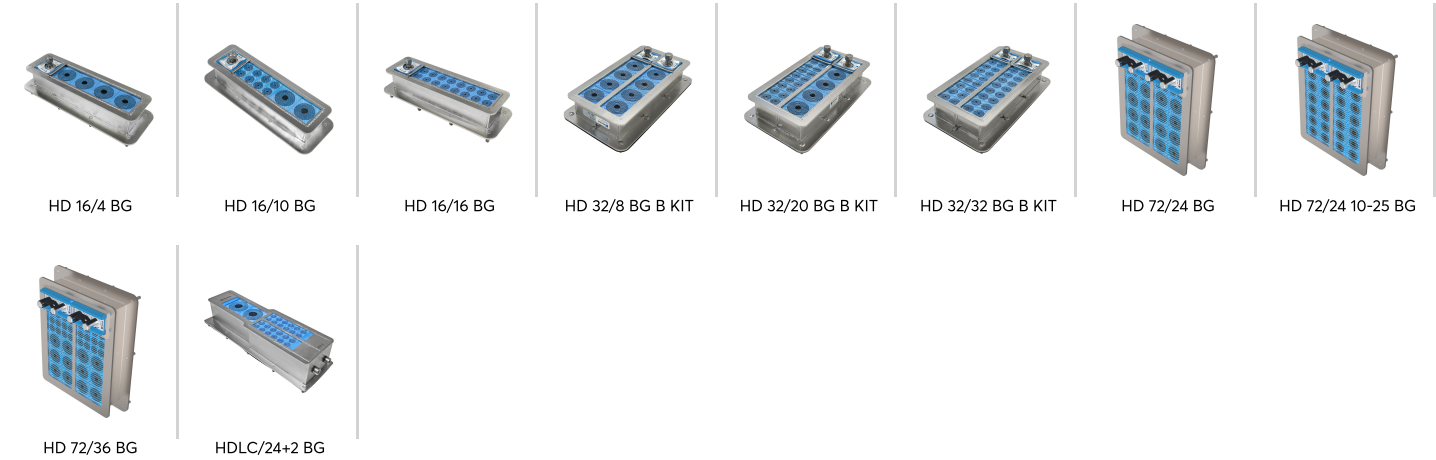

标题	配置	外部尺寸 WxHxD	开孔尺寸 w x h	重量	产品编号
HD 16/4 BG	4x (9.5-32.5)	83.8 x 236 x 60	64(+1/-0.5) x 216(+1/-0.5)	2	193105
HD 16/10 BG	2x (9.5-32.5), 8x (3.5-16.5)	83.8 x 236 x 60	64(+1/-0.5) x 216(+1/-0.5)	2	198299
HD 16/16 BG	16x (3.5-16.5)	83.8 x 236 x 60	64(+1/-0.5) x 216(+1/-0.5)	2	193104
HD 32/8 BG B KIT	8x (9.5-32.5)	130 x 236 x 60	110(+1/-0.5) x 216(+1/-0.5)	3.3	120373
HD 32/20 BG B KIT	4x (9.5-32.5), 16x (3.5-16.5)	130 x 236 x 60	110(+1/-0.5) x 216(+1/-0.5)	3.4	120376
HD 32/32 BG B KIT	32x (3.5-16.5)	130 x 236 x 60	110(+1/-0.5) x 216(+1/-0.5)	3.5	120374
HD 72/24 BG	8x (3.5-16.5), 16x (9.5-32.5)	225 x 281 x 113	208(+1/-0.5) x 264(+1/-0.5)	5	246608
HD 72/24 10-25 BG	24x (10.0-25.0)	225 x 281 x 113	208(+1/-0.5) x 264(+1/-0.5)	5	246609
HD 72/36 BG	24x (3.5-16.5), 12x (9.5-32.5)	225 x 281 x 113	208(+1/-0.5) x 264(+1/-0.5)	5	246610
HDLC/24+2 BG	2x (24.0-54.0), 24x (3.5-16.5)	378 x 120 x 94	366(+1/-1) x 108(+1/-1)	5.6	173280

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2025-07-02