
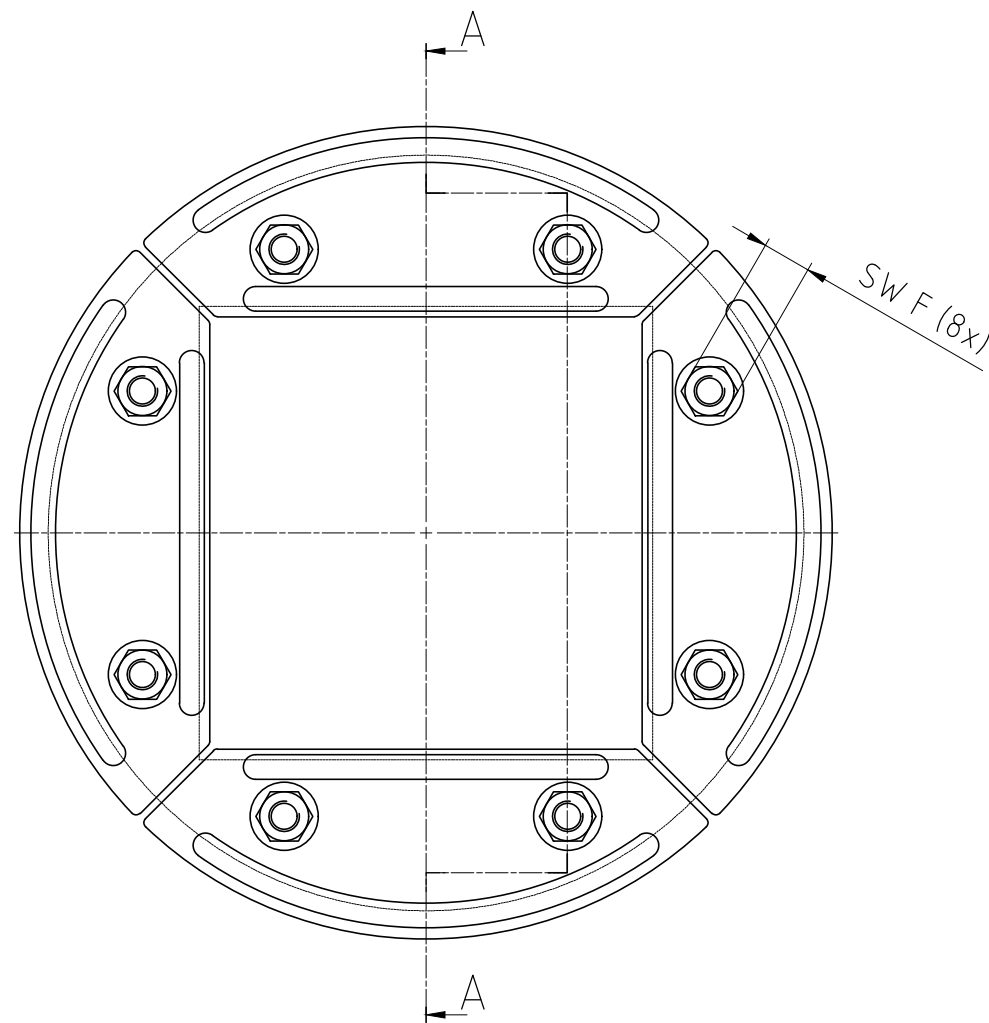
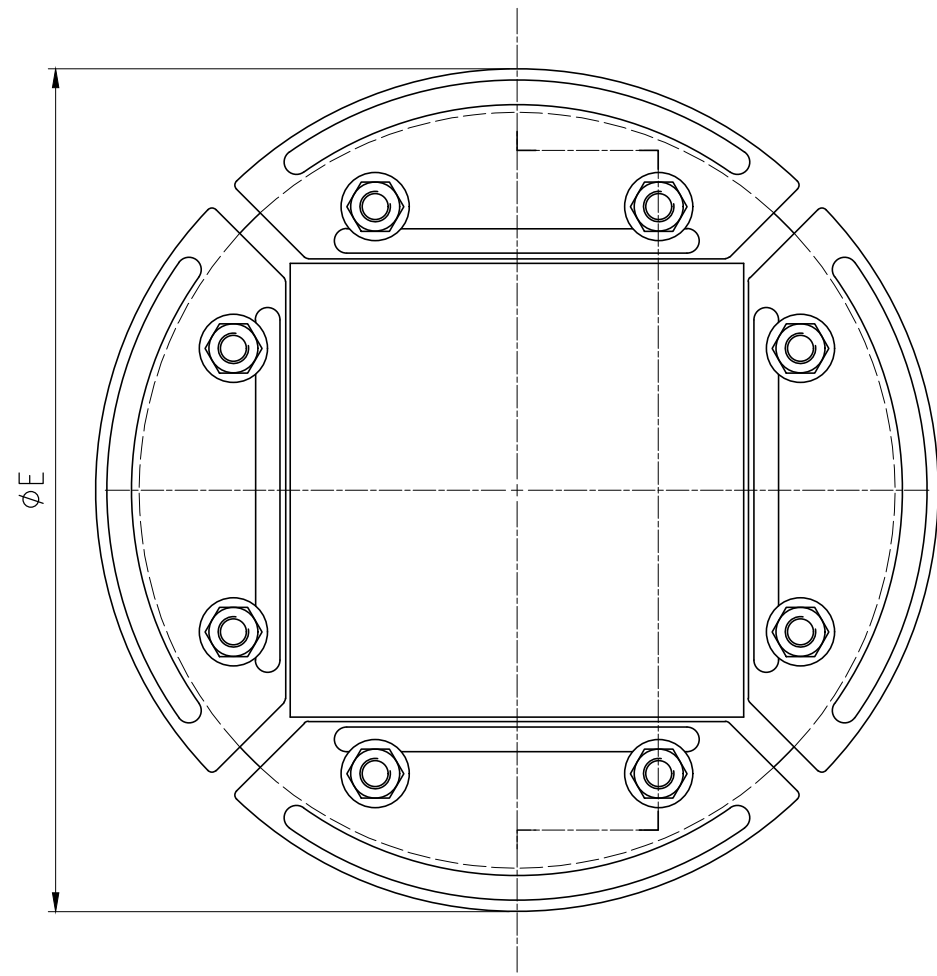
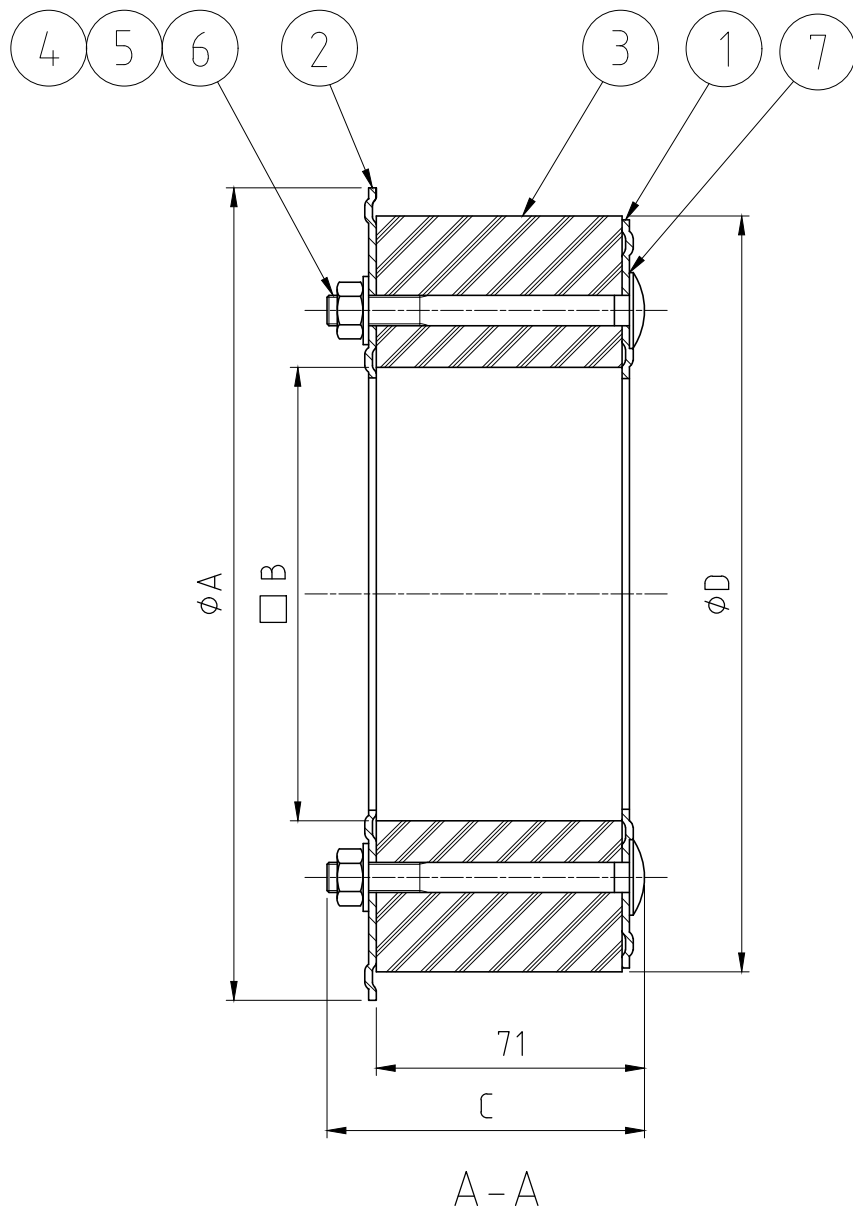
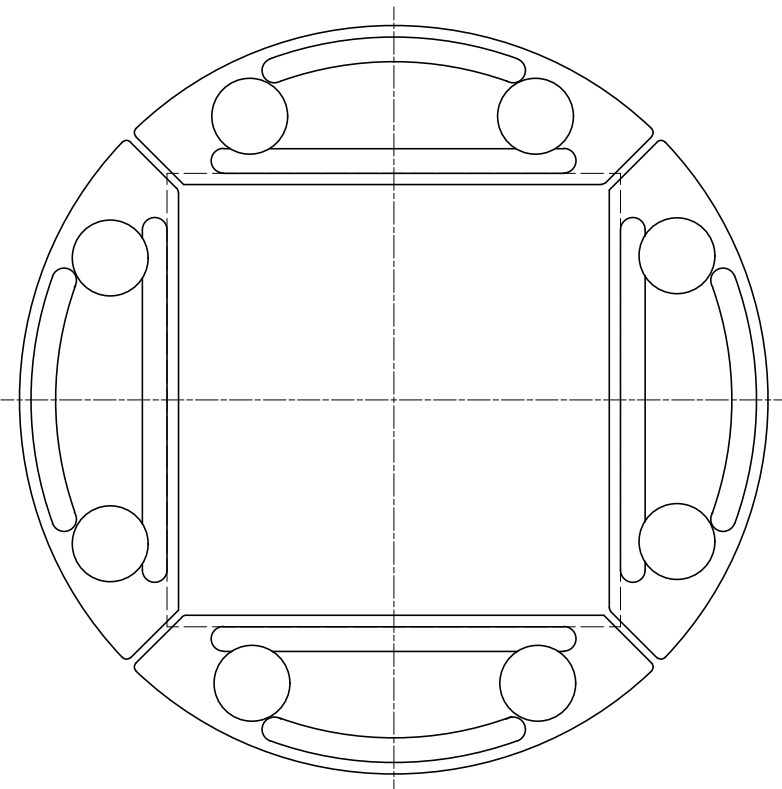


烙克赛克保留所有权利。未经授权严禁复制，使用以及向第三方泄漏。

All rights reserved. Unauthorized reproduction, use or disclosure to third parties is strictly forbidden.

Rev 2.0

TYPE	A (MM)	B (MM)	C (MM)	D (MM)	E (MM)	F (MM)
R 125	142	80	85	125	148	10
R 127	142	80	85	127	148	10
R 150	165	90	85	150	171	13
R 200	215	120	85	200	223	13

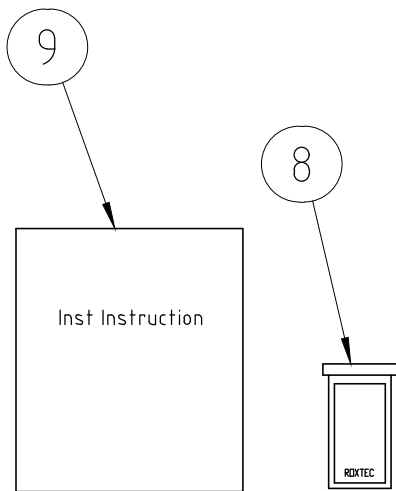

NOTE:
GALVANIZED FITTINGS ARE POWDER
COATED BLACK

G		2024-01-22	se-parham
Rev	Type of revision	Date	Sign

9	1	INSTALLATION INSTRUCTION		-
8	1	LUBRICANT		-
7	8	GASKET MVBF BOLTS	EPDM	-
6	8	WASHER	DACROLIT/A4	-
5	8	NUT	DACROLIT/A4	-
4	8	OVAL HEAD SCREW	DACROLIT/A4	-
3	1	RUBBER FRAME	ROXYLON	-
2	4	FRONT FITTING	GALV / ACID PROOF ST. STEEL	-
1	4	REAR FITTING	GALV / ACID PROOF ST. STEEL	-
Item	Qty	Designation	Specification	Net Weight
General tolerance ISO 2768-1/2-M/K EN ISO 13920-BF		Welded details EN ISO 5817-B General surface roughness, Ra 12,5 EN ISO 18042-B	Designed by se-joahel Created Date 2003-10-30 Latest save date 2024-01-22 Format A2 Scale 1:2 Sheet no	Total Weight -
Title R FRAMES R 125-200 Restricted due to www.roxtec.com		Information drawing		Rev G
Drawing number S1005506		Projection method G		