


TYPE	CABLE/PIPE Ø (A-B) [mm]	W [mm]	H [mm]	D [mm]	L [mm]	Z [mm]	WALL THICKNESS [mm]	RECOMMENDED HOLE CUT [mm]	TOOL SIZE [mm]
C R S T 25	3.6 - 12	36	39	32	16.5	25	1 - 10	33	2.5
C R S T 31	4 - 17	46	50	40	15.5	25	1 - 8	41	2.5
C R S T 43	4 - 23	60	65	50	37.5	50	1 - 28	52	4
C R S T 50	8 - 30	70	78	63	36	50	1 - 26	64	4

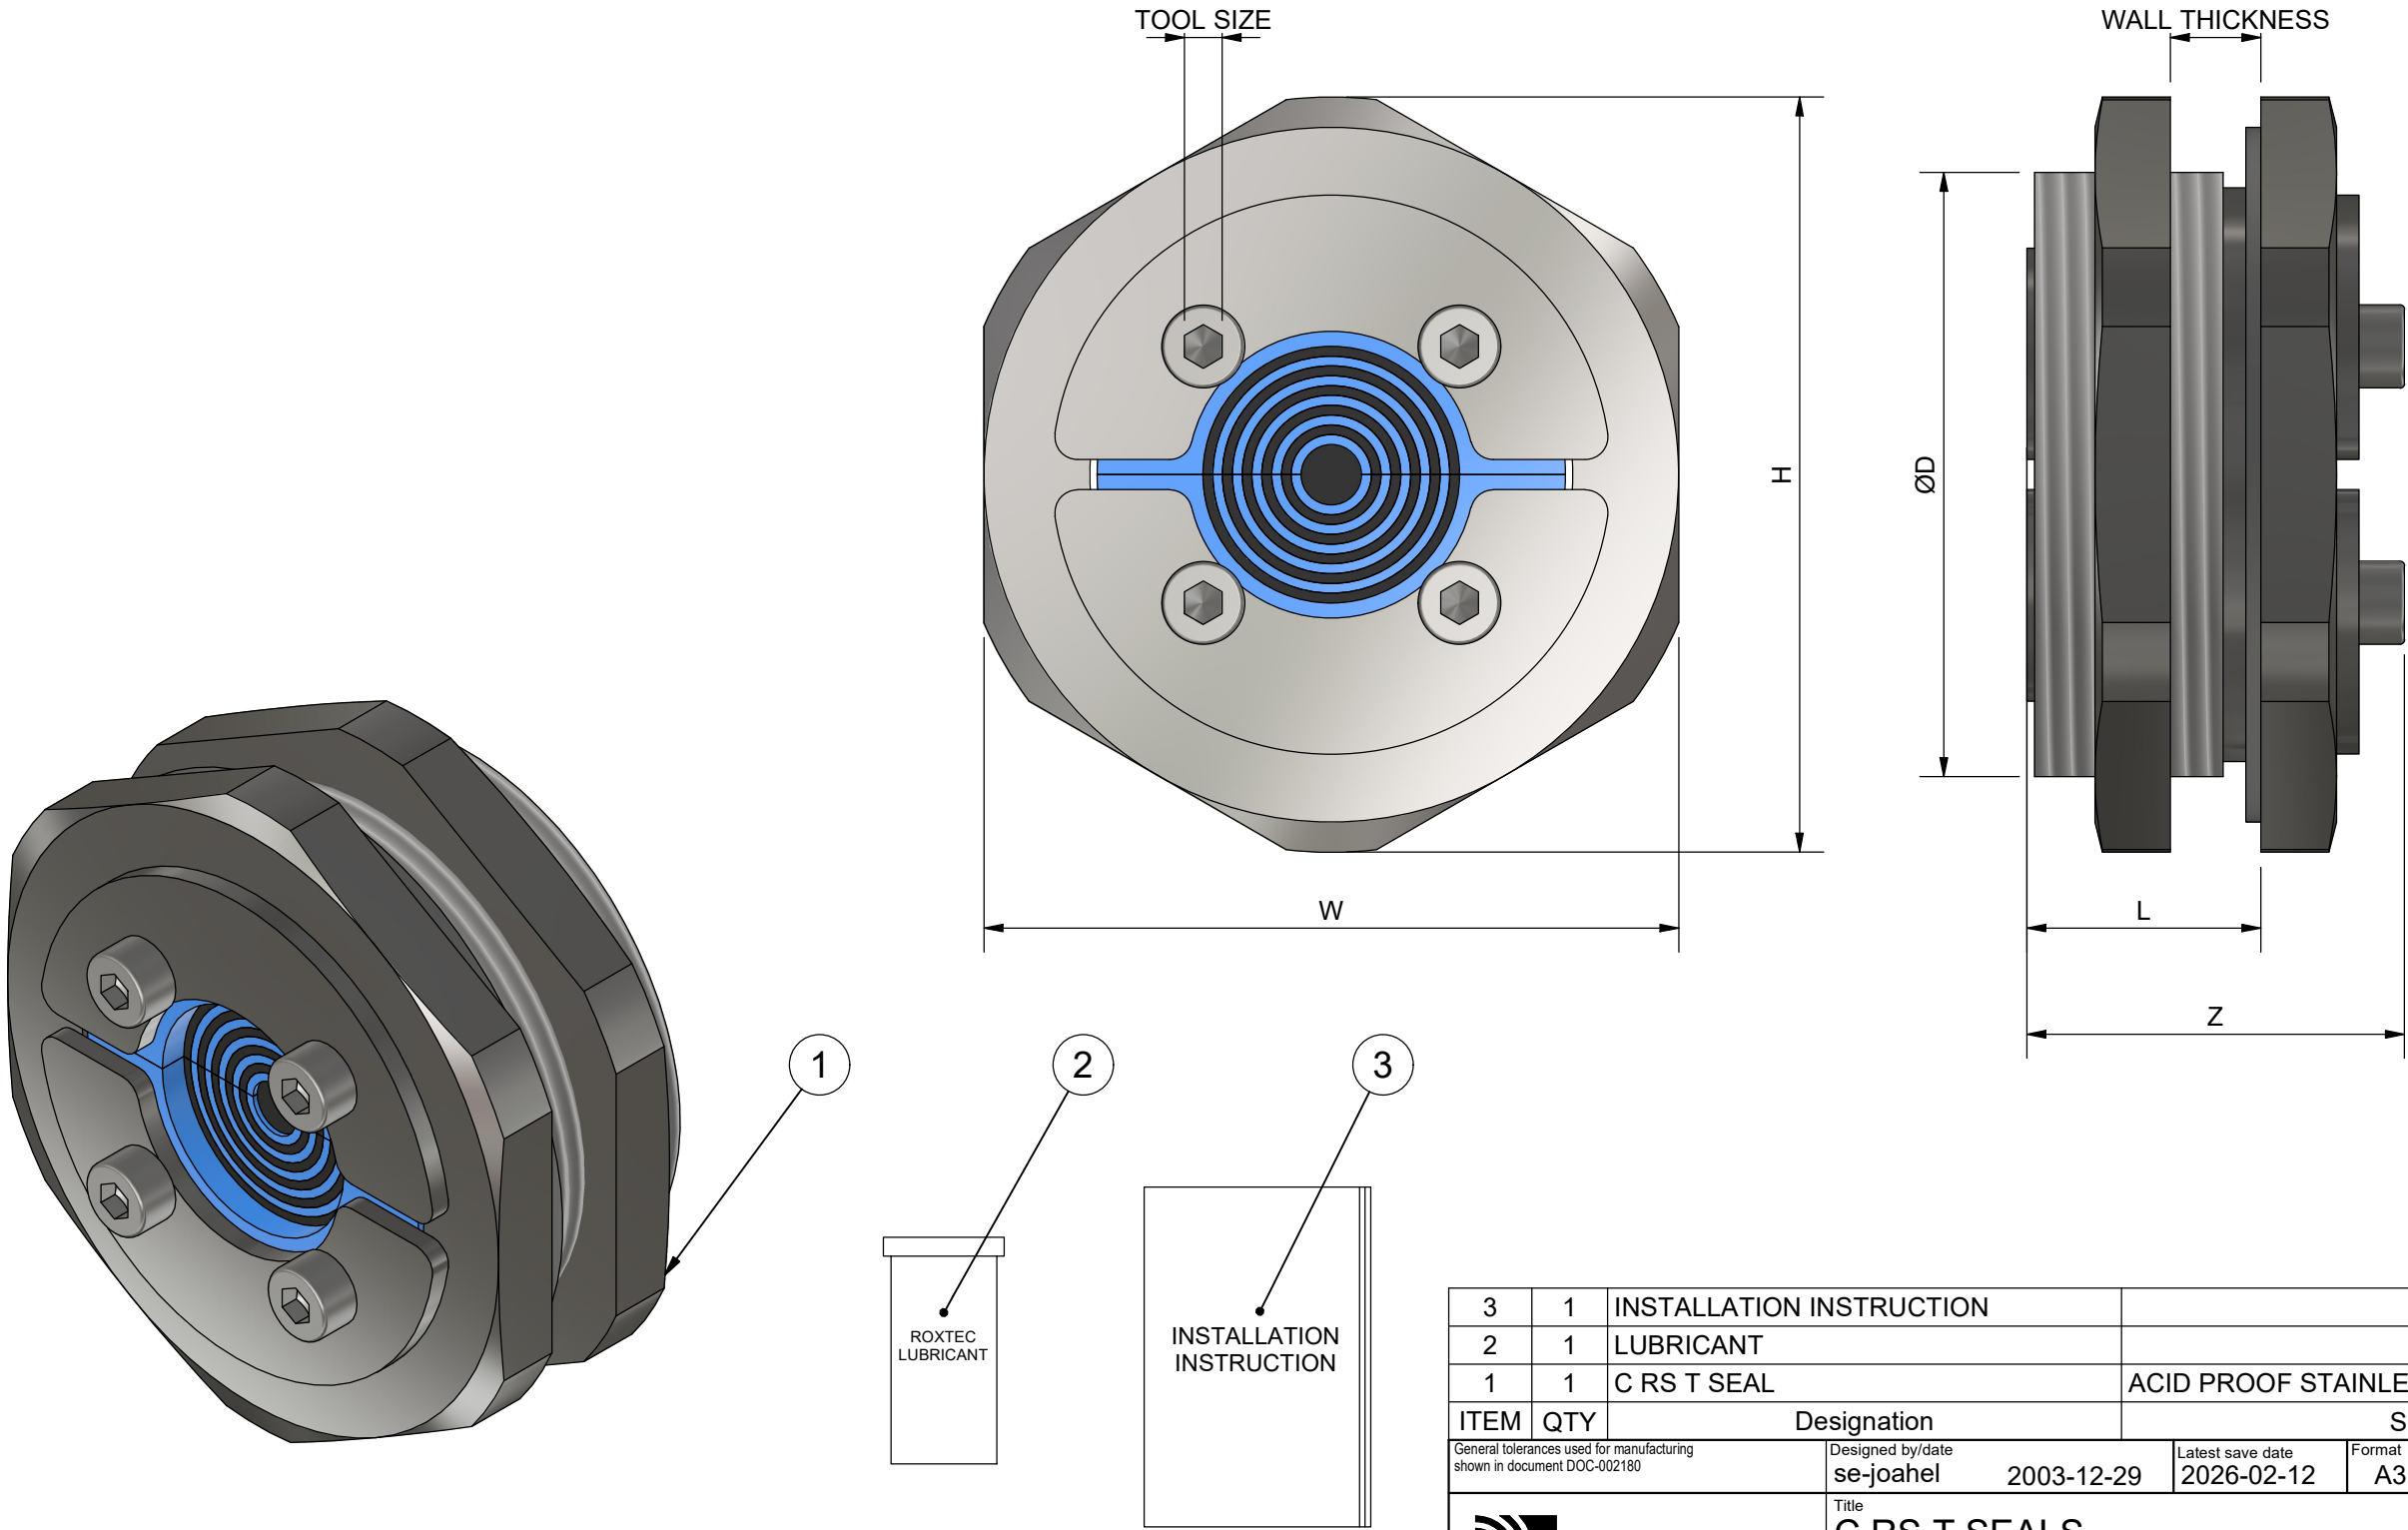

G	LAYOUT UPDATED	2026-02-11	se-marfre
Rev	Type of revision	Date	Sign

3	1	INSTALLATION INSTRUCTION	
2	1	LUBRICANT	
1	1	C R S T SEAL	ACID PROOF STAINLESS STEEL & ROXYLON
ITEM	QTY	Designation	Specification
General tolerances used for manufacturing shown in document DOC-002180		Designed by/date se-joahel 2003-12-29	Latest save date 2026-02-12
		Format A3	Scale 2 : 1
		Sheet no 1 / 1	TotWeight N/A
		Title C R S T SEALS C R S T 25-50	Projection method N/A
		Restricted due to Information drawing	Rev G
		Drawing number S1005785	