
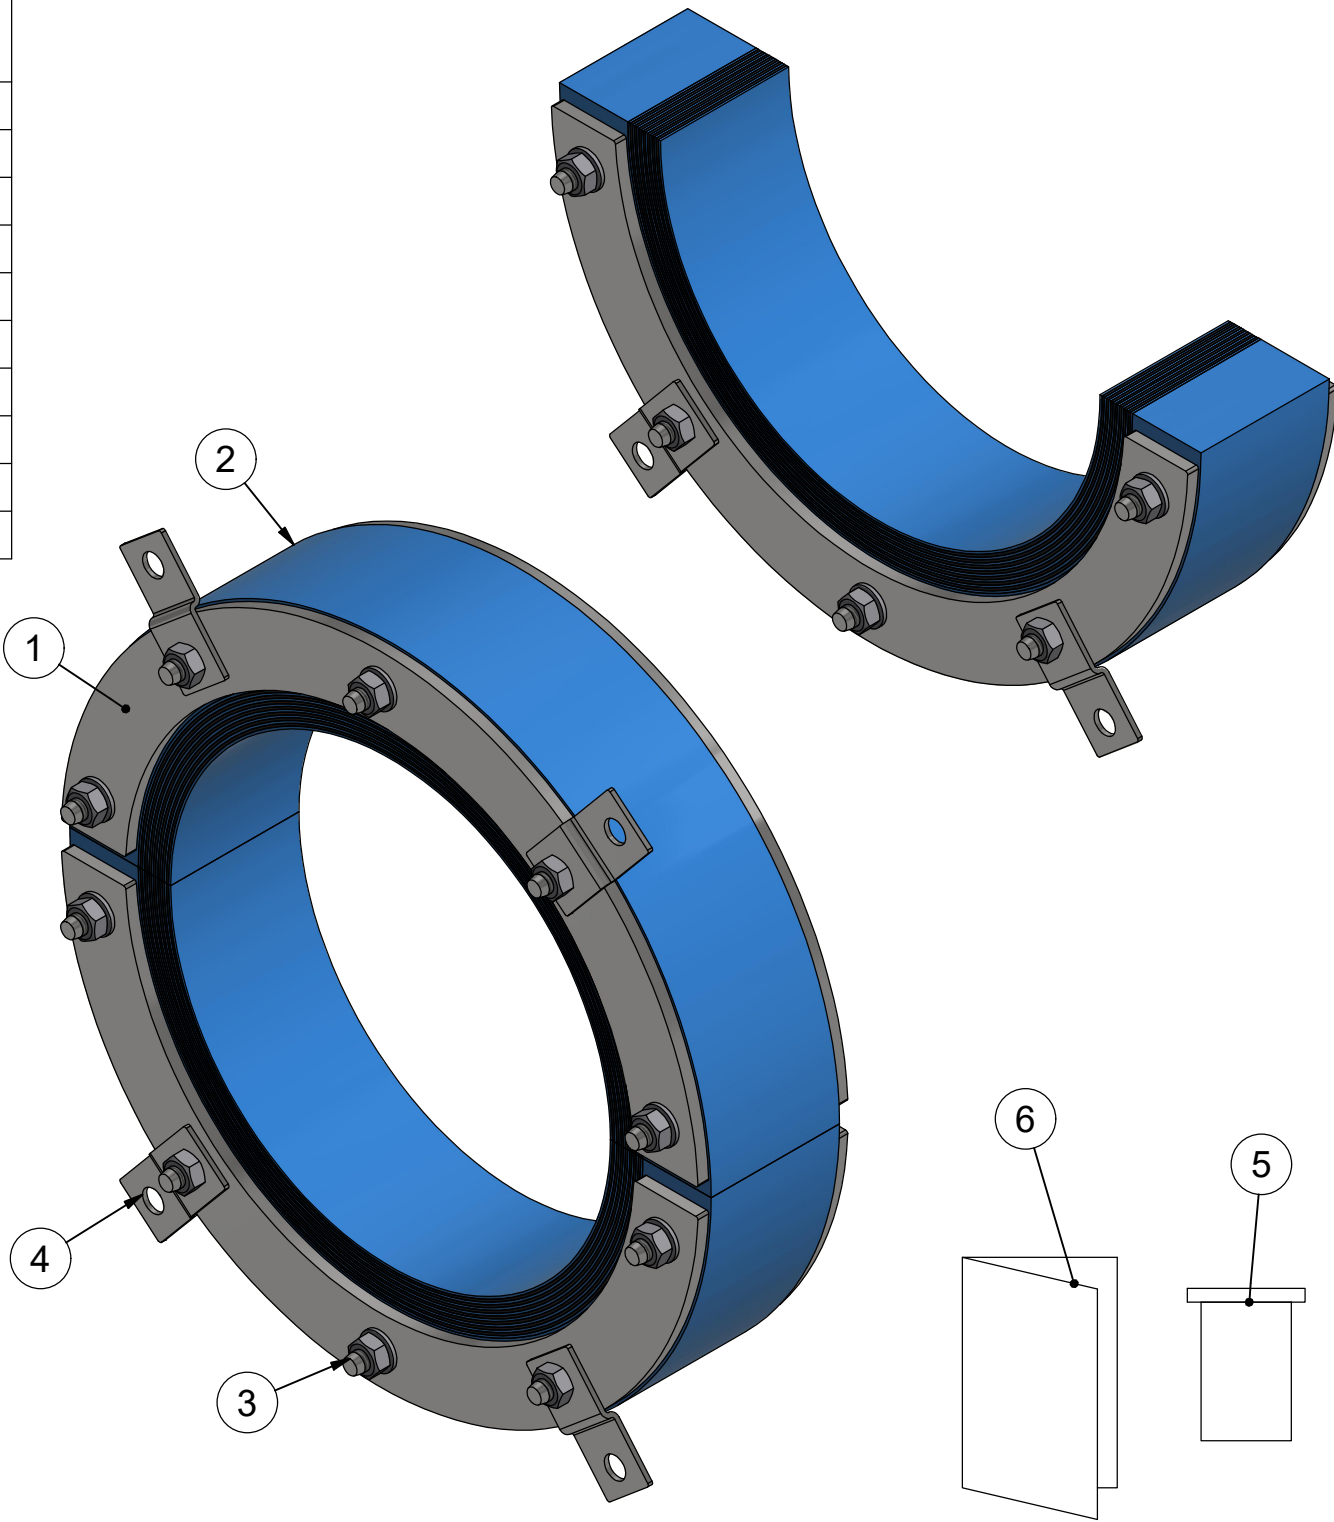


SEAL	A	B	C	L	Z	TOOL SIZE	Q
RS 225 WOC	151	181	225	64	84	10	10
RS 250 WOC	176	206	250	64	84	10	10
RS 300 WOC	206	236	300	65	90	13	10
RS 350 WOC	244	286	350	65	90	13	12
RS 400 WOC	294	336	400	66	90	13	12
RS 450 WOC	344	386	450	66	95	17	12
RS 500 WOC	394	436	500	68	95	17	12
RS 550 WOC	444	486	550	68	95	17	12
RS 600 WOC	494	536	600	68	95	17	14
RS 644 WOC	538	580	644	68	95	17	14

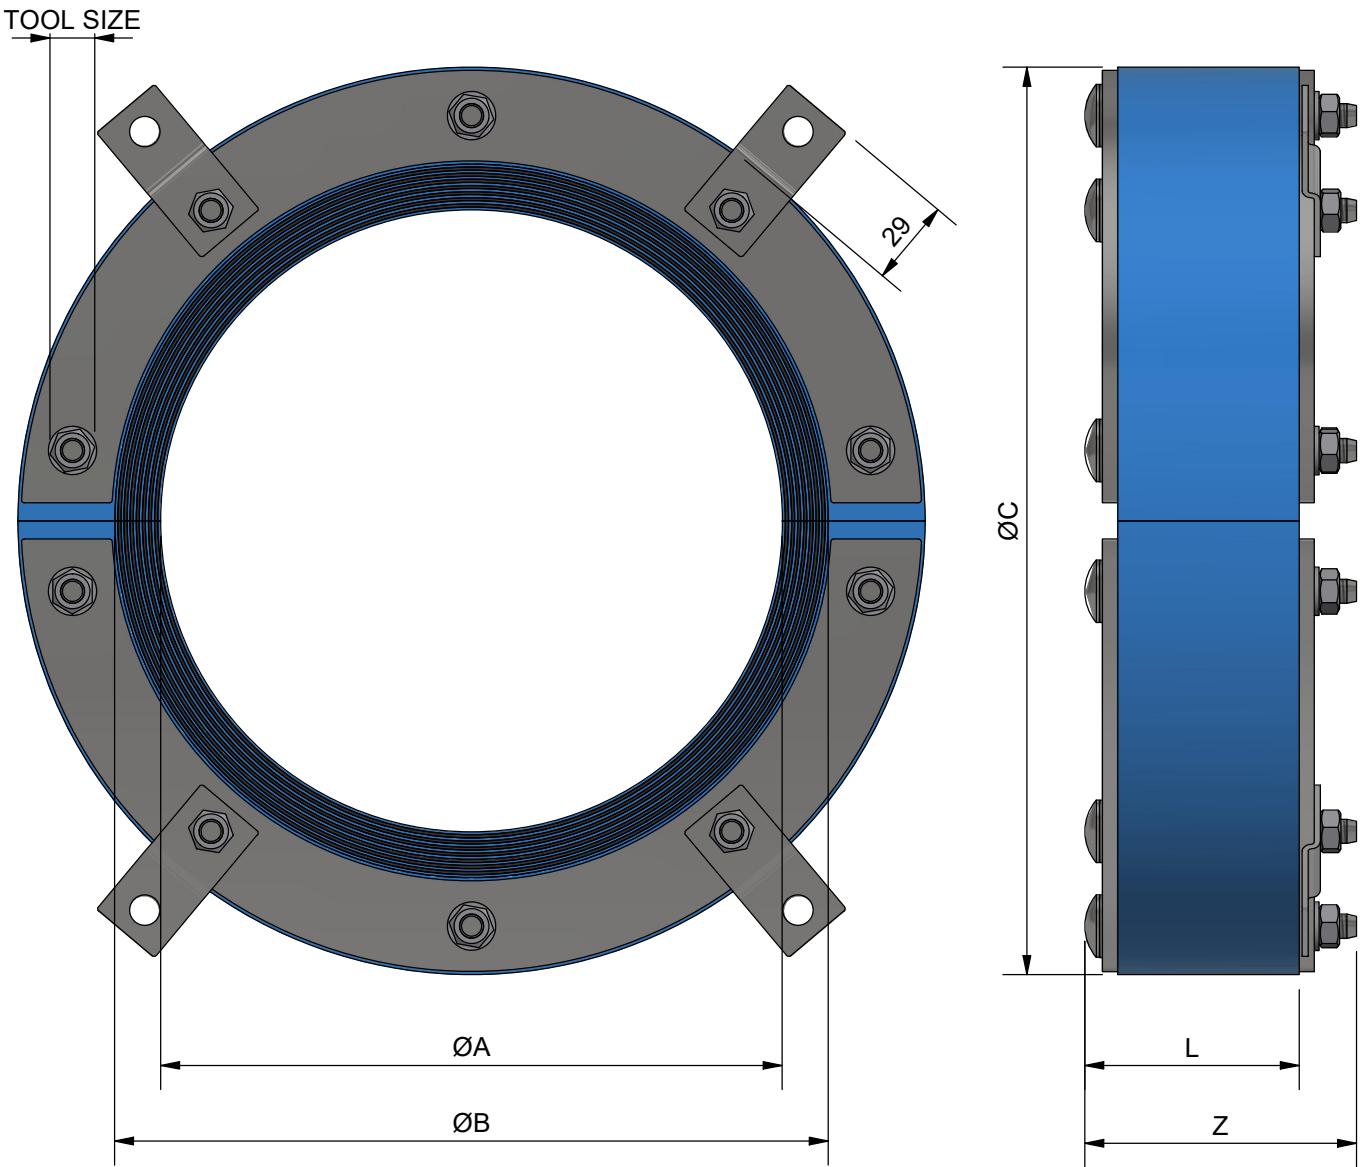

6	1	INSTALLATION INSTRUCTION						
5	1	LUBRICANT						
4	4	STOP FLANGE	ACID PROOF STAINLESS STEEL					
3	Q	FASTENERS	DIN 603 / ISO 4032 / DIN 125 A4					
2	2	PROFILE	ROXYLON					
1	4	FITTING	ACID PROOF STAINLESS STEEL					
ITEM	QTY	Designation	Specification			Weight		
General tolerances used for manufacturing shown in document DOC-002180			Designed by/date se-jenboh 2004-08-30	Latest save date 2024-01-22	Format A3	Scale	Sheet no 1 / 1	TotWeight 6,1 kg
 www.roxtec.com			Title RS SEALS RS 225-644 Restricted due to			Projection method 		
Information drawing			Drawing number S1006598			Rev G		