


MATERIAL AISI 304
 MATERIAL DOMEX 200
 SURFACE TREATMENT POWD. COAT. RAL7035

We reserve all rights in this document and in the information contained therein. Reproduction, use or disclosure to third parties without express authority is strictly forbidden. ROXTEC INTERNATIONAL AB

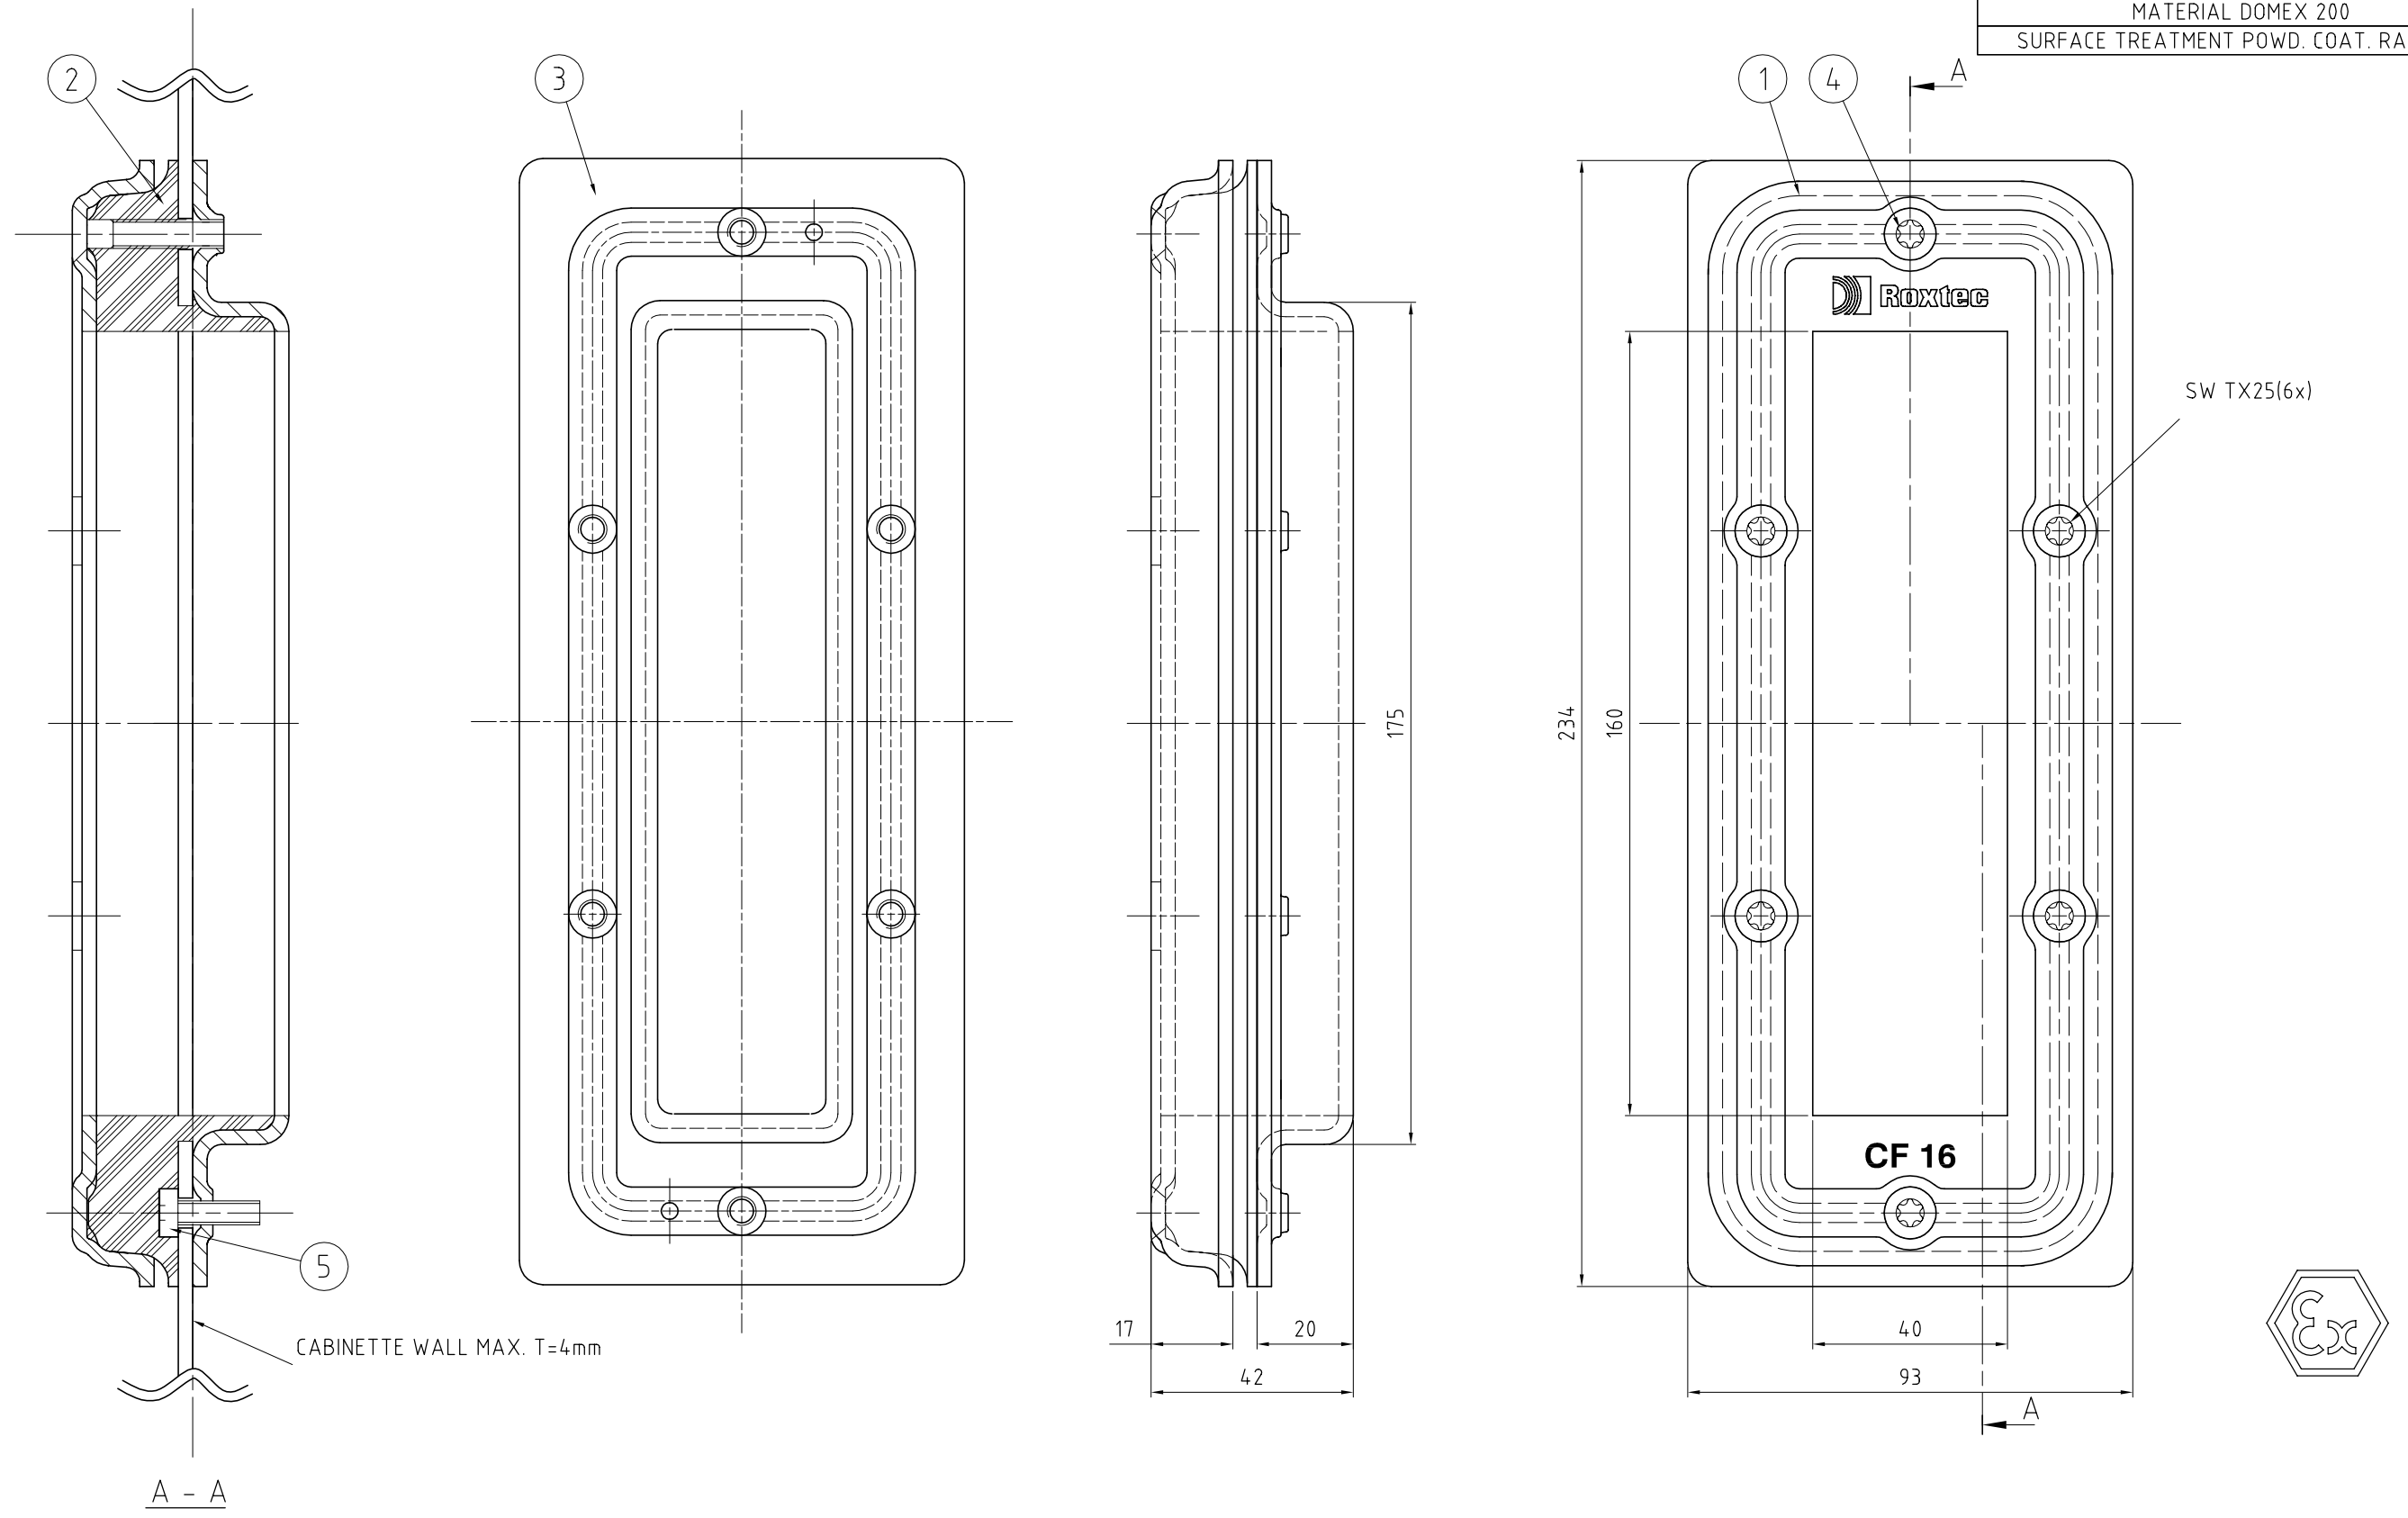

| Item | Qty | Designation | Specification | Net Weight |
|---|-----|--------------------|--|--|
| 5 | 2 | SCREW | MRX-Z M5x20 4,8 A4 | - |
| 4 | 6 | SCREW | MKFT 8.8 TX M6x35, A4 | - |
| 3 | 1 | BACK PIECE | | - |
| 2 | 1 | COMPRESSION RUBBER | | - |
| 1 | 1 | TOP PIECE | | - |
| ROXTEC INTERNATIONAL AB BOX 540 S-371 23 Karlskrona TEL: +46 455 366700 FAX: +46 455 82012 | | | Designed by: M PRZYBYLA Checked by: J AKESSON Approved by: J AKESSON Restricted due to: INFORMATION DRAWING | Date: 2009-03-06 Format: A1 Scale: Drawing number: S1016538 |
| General tolerance: EN ISO 7081-2-A/K Welded details: EN ISO 5817-B General surface roughness: Ra 12,5 | | | Title: CF 16 EX ASSEMBLY Projection method: 1st angle | Total weight: - Rev: - |

| Rev | Type of revision | Date | Sign |
|-----|------------------|------------|------|
| - | - | 2007-06-14 | |