

烙克赛克保留所有权利。未经授权严禁复制、使用以及向第三方泄露。

保密 Confidential


All rights reserved. Unauthorized reproduction, use or disclosure to third parties is strictly forbidden.

Rev 3.2


TYPE	H1 [mm]	H2 [mm]	Y [mm]	A [QTY]
G 2xN Ex	101	233	91.5	2
G 4xN Ex	159.5	291.5	80.5	3
G 6xN Ex	218	350	75	4
G 8xN Ex	278	410	90	4



N [QTY]	W [mm]	Z [mm]	B [QTY]
x1	252.5	101.3	2
x2	383	111	3
x3	513.5	92.7	5
x4	644	99	6
x5	774.5	103.5	7
x6	905	95	9
x7	1035.5	98.6	10
x8	1166	101.5	11
x9	1296.5	103.9	12
x10	1427	98.4	14

TOTAL NUMBER OF HOLES = 2\*(A+B)  
N: NUMBER OF FRAME OPENINGS

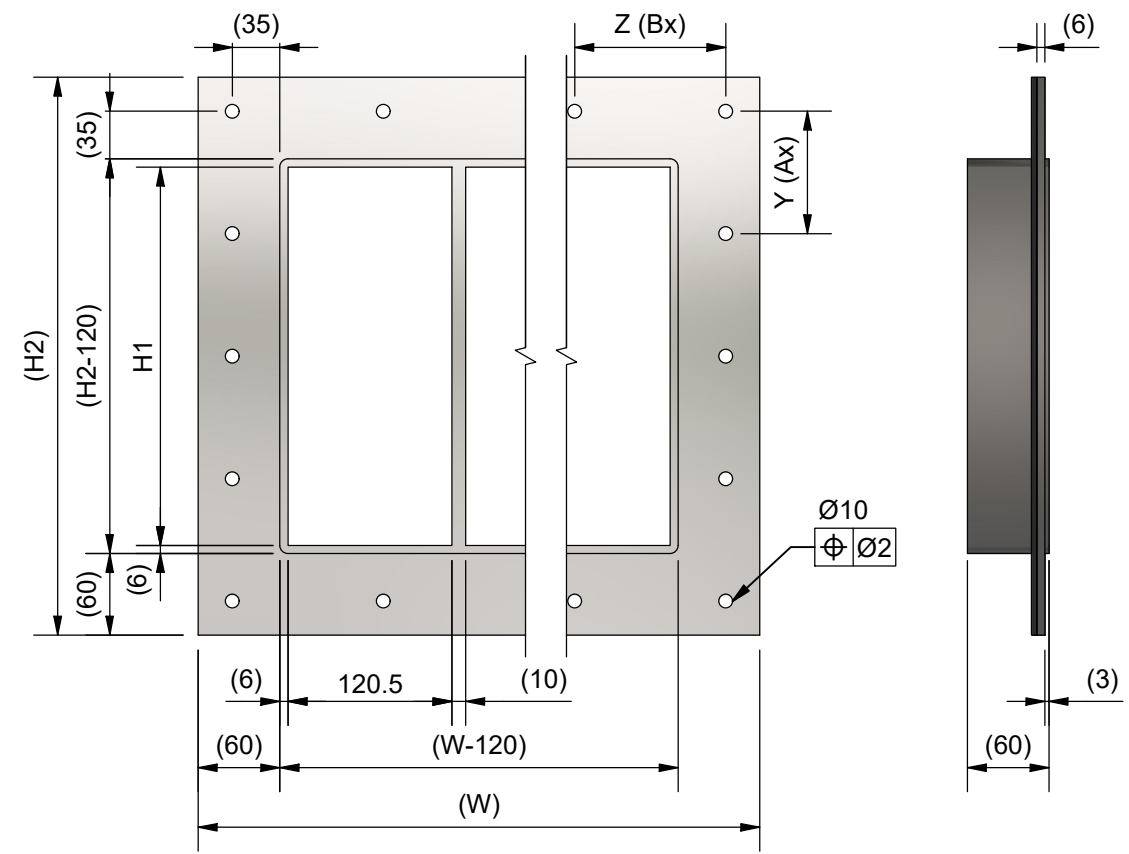

MATERIAL ACID PROOF STAINLESS STEEL
MATERIAL MILD STEEL HOT DIPPED GALVANIZED ACC, TO ISO 1461
MATERIAL MILD STEEL PRIMED ( TRANSPORT PROTECTION )

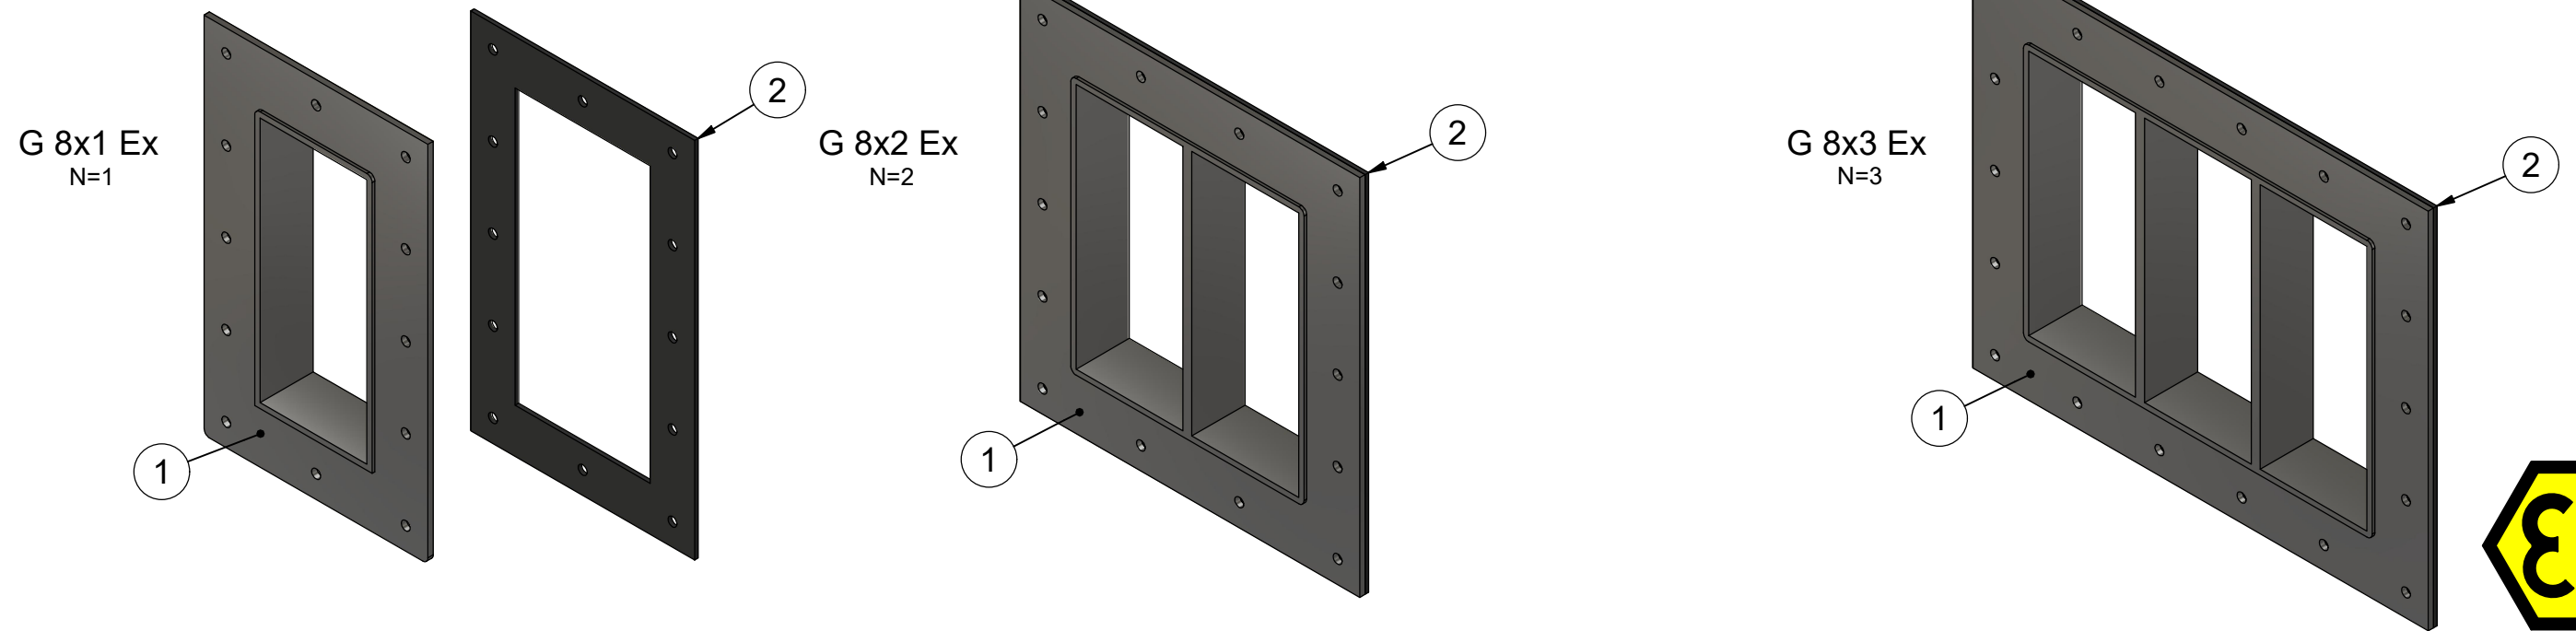

2	1	GASKET						
1	1	FRAME						
ITEM	QTY	Designation	Specification				Weight	
General tolerances used for manufacturing shown in document DOC-002180		Designed by/date se-marprz 2009-03-06	Latest save date 2026-01-22	Format A3	Scale 9:50	Sheet no 1 / 1	TotWeight N/A	
 roxtec.com		Title <b>G Ex FRAME</b> <b>SINGLE AND COMBINATION FRAME</b>				Projection method 		
Rev		Type of revision	Date	Sign	Information drawing		Drawing number S1016551	Rev E

E	FRAME NAMES CORRECTED	2026-01-22	se-marfre
Rev	Type of revision	Date	Sign

Information drawings show general design and nominal dimensions if not else stated