

烙克赛克保留所有权利。未经授权严禁复制，使用以及向第三方泄露。





All rights reserved. Unauthorized reproduction, use or disclosure to third parties is strictly forbidden.

Rev 3.1

TYPE	H1 [mm]	H2 [mm]	Y [mm]	VERTICAL HOLES [QTY]
G 2xN	101	233	91.5	3
G 4xN	159.5	291.5	80.5	4
G 6xN	218	350	75	5
G 8xN	278	410	90	5

N [QTY]	W [mm]	X [mm]	HORIZONTAL HOLES [QTY]
x1	252.5	101.3	3
x2	383	111	4
x3	513.5	92.7	6
x4	644	99	7
x5	774.5	103.5	8
x6	905	95	10
x7	1035.5	98.6	11
x8	1166	101.5	12
x9	1296.5	103.9	13
x10	1427	98.4	15

N: FRAME OPENINGS/ROW

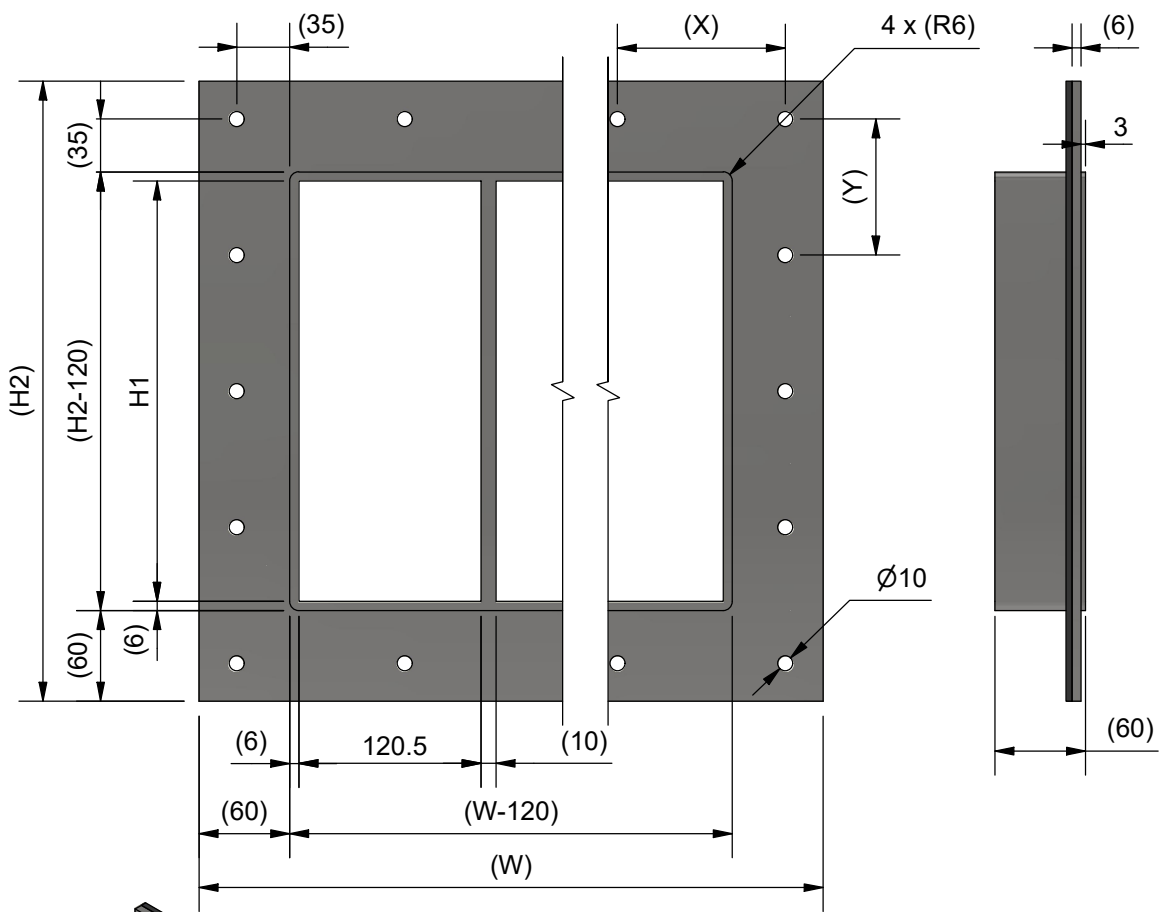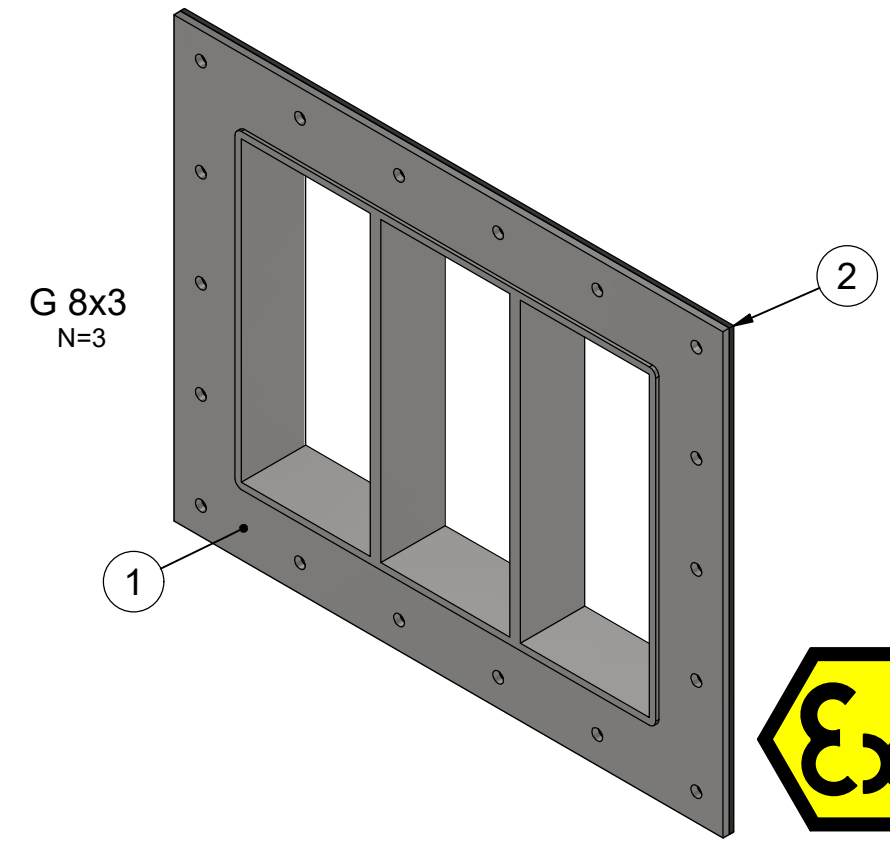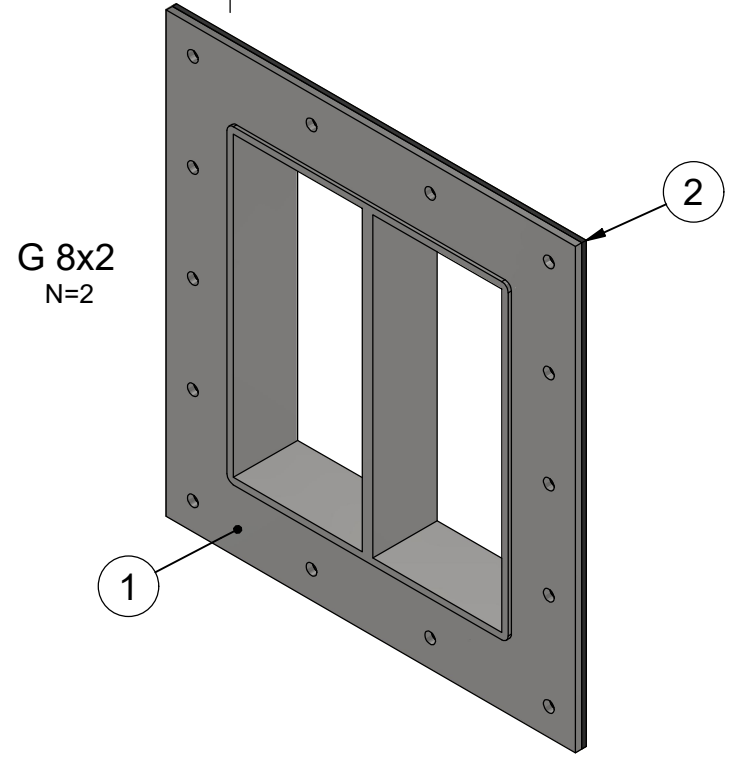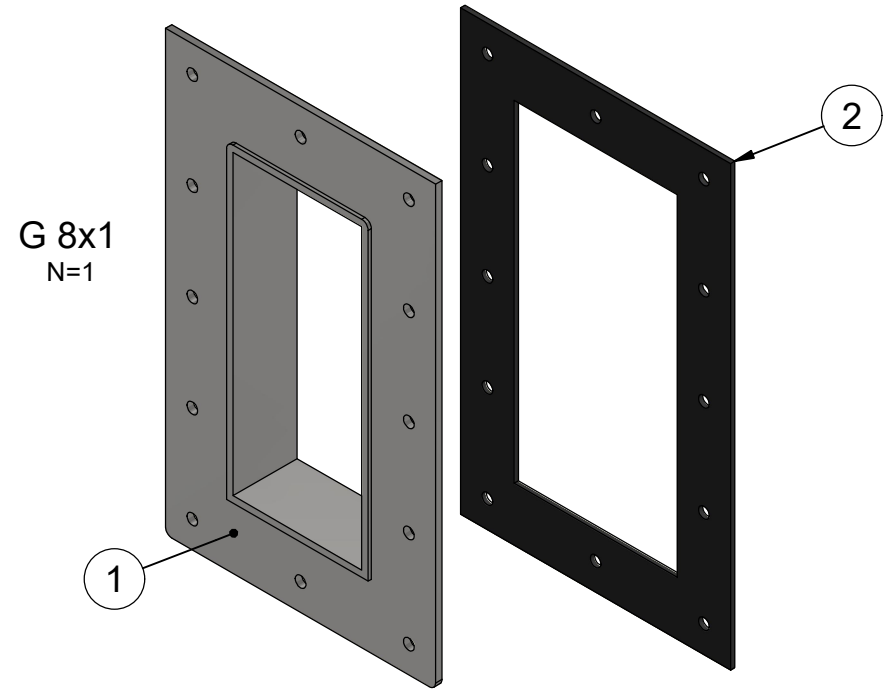

MATERIAL ACID PROOF STAINLESS STEEL
MATERIAL MILD STEEL HOT DIPPED GALVANIZED ACC, TO ISO 1461
MATERIAL MILD STEEL PRIMED (TRANSPORT PROTECTION)

B	LAYOUT CHANGED	2024-08-13	se-marfre
Rev	Type of revision	Date	Sign

2	1	GASKET						
1	1	FRAME						
ITEM	QTY	Designation	Specification				Weight	
General tolerances used for manufacturing shown in document DOC-002180			Designed by/date se-marprz 2009-03-06	Latest save date 2024-08-21	Format A3	Scale	Sheet no 1 / 1	TotWeight
		Title G...B EX FRAME SINGLE AND COMBINATION FRAME					Projection method 	
www.roxtec.com			Restricted due to Information drawing		Drawing number	S1016551	Rev B	



Information drawings show general design and nominal dimensions if not else stated