



TYPE	W (MM)	H (MM)	Ømin. (MM)	Ømax. (MM)
RM 15 ES EX	15	15	3	11
RM 15w40 ES EX	15	40	3.5	10.5
RM 20 ES EX	20	20	4	14.5
RM 20w40 ES EX	20	40	3.5	16.5
RM 30 ES EX	30	30	10	25
RM 40 ES EX	40	40	21.5	34.5
RM 40 10-32 ES EX	40	40	9.5	32.5
RM 60 ES EX	60	60	28	54
RM 60 24-54 ES EX	60	60	24	54
RM 120 ES EX	120	120	67.5	99

NOTE: 60 AND 120 MODULES AVAILABLE WOC (WITHOUT CORE).




RM ES EX (SIZE 15-120)
RM 40 10-32 ES EX
RM 60 24-54 ES EX
1 CABLE/MODULE

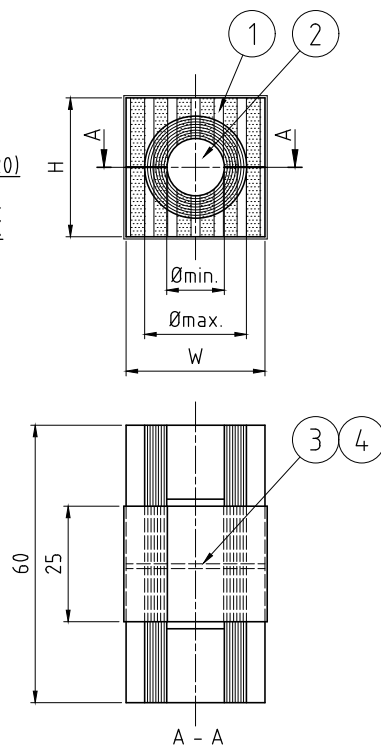

RM 20w40 ES EX
2 CABLES/MODULE



RM 15w40 ES EX
3 CABLES/MODULE

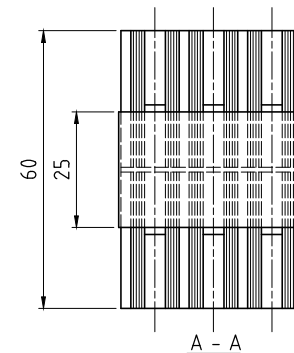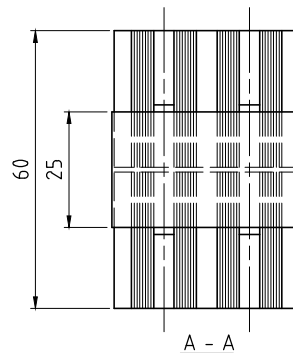

4	2	CONDUCTIVE RUBBER	-	-	
3	2	CONDUCTIVE TAPE	-	-	
2	-	CORE	ROXYLON	-	
1	2	MDM PROFILE	ROXYLON	-	
Item	Qty	Designation	Specification		Net Weight
General tolerances used for manufacturing shown in document DDC-002180					
Designed by		Created Date		Latest save date	Total Weight
se-marprz		2009-03-10		2025-09-01	-
Title		Format		Scale	Sheet no
RM ES EX MODULES		A3		1:1	-
ASSEMBLY		Restricted due to		Drawing number	Projection method
Information drawing		S1016604		-	-
Rev		A			

A	TABLE UPDATED	2025-09-01	se-marfre
Rev	Type of revision	Date	Sign