


COMSEAL 12/3 ES/PE		
MODULE TYPE	RANGE	QTY
40 10-32	0+9.5-32.5	3



COMSEAL 12/6 ES/PE		
MODULE TYPE	RANGE	QTY
20w40	0+3.5-16.5	2
40 10-32	0+9.5-32.5	2

COMSEAL 12/9 ES/PE		
MODULE TYPE	RANGE	QTY
20w40	0+3.5-16.5	4
40 10-32	0+9.5-32.5	1

COMSEAL 12/12 ES/PE		
MODULE TYPE	RANGE	QTY
20w40	0+3.5-16.5	6

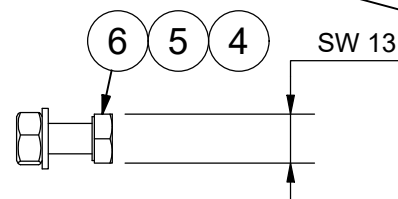

NOTE:
 MODULES ARE AVAILABLE IN PE AND ES VERSION:
 ES = ELECTROMAGNETIC SHIELDING (WHITE STRIPES)
 PE = POTENTIAL EQUALIZATION (BLACK STRIPES)
 WHEN THE STRUCTURE IS THINNER THAN 2mm A COUNTER FLANGE IS REQUIRED.
 HOLECUT IS ACCORDING TO FL21



ITEM	QTY	Designation	Specification	Weight
8	1	INSTALLATION INSTRUCTION		
7	1	ASSEMBLY GEL		
6	4	NUT	M6M M8 STAINLESS	
5	4	WASHER	RB M8 STAINLESS	
4	4	SCREW	M6S M8x20 STAINLESS	
3	1	GASKET	CONDUCTIVE	
2	1	MODULE KIT	ACCORDING TO TABLE	0
1	1	COMSEAL FRAME	NICKELPLATED ALUMINIUM	0.5

General tolerances used for manufacturing shown in document DOC-002180		Designed by/date	Latest save date	Format	Scale	Sheet no	TotWeight
		se-jenboh	2010-04-13	A3		1 / 1	0.5 kg
 www.roxtec.com		Title COMSEAL 12 ES/PE KIT SOLUTIONS				Projection method 	
		Restricted due to Information drawing				Drawing number S1020119	

E	STOP EDGES ADDED	2021-01-08	se-henols
Rev	Type of revision	Date	Sign