
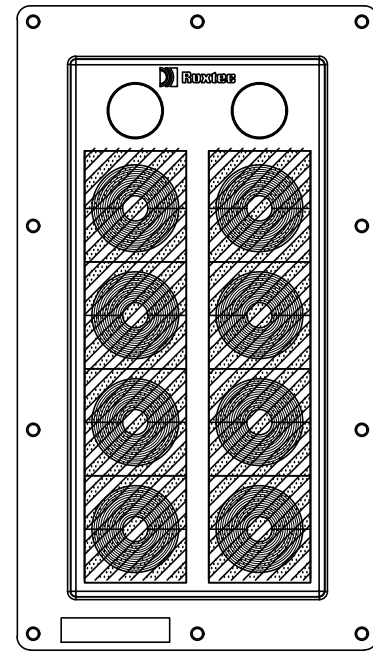
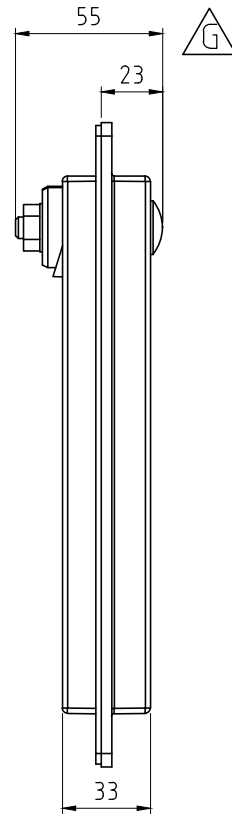
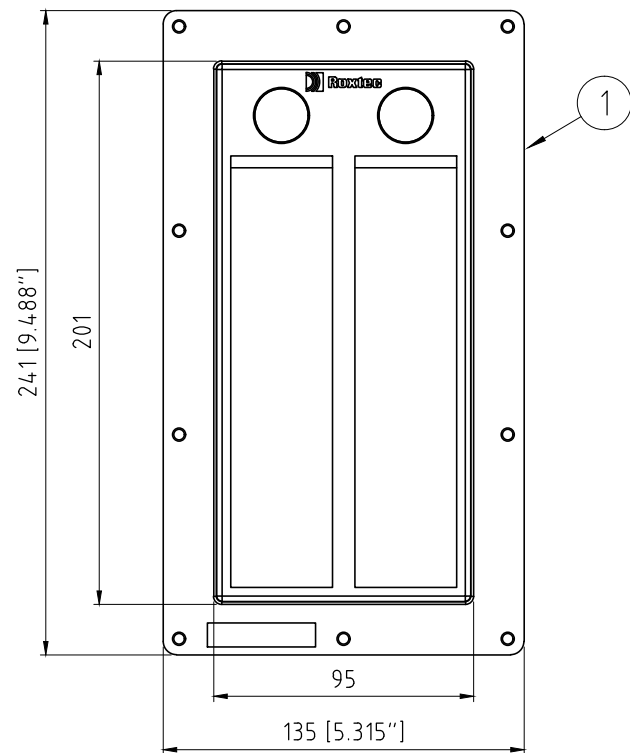
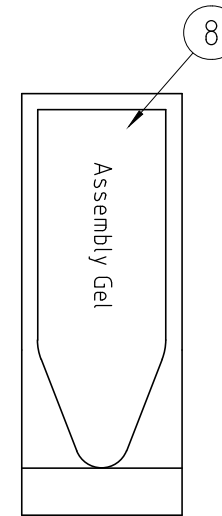
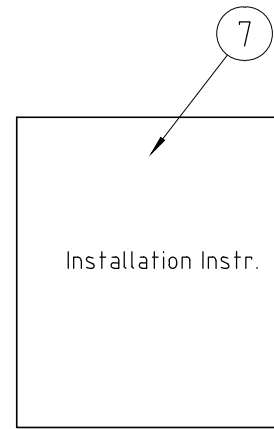



烙克赛克保留所有权利。未经授权严禁复制，使用以及向第三方泄漏。

All rights reserved. Unauthorized reproduction, use or disclosure to third parties is strictly forbidden.


Rev 2.0

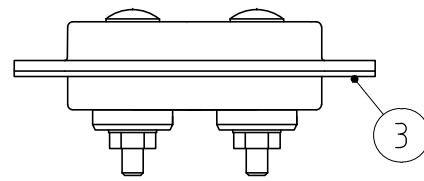


COMSEAL 32/8 ES/PE		
MODULE TYPE	RANGE	QTY
40 10-32/30	0+9.5-32.5	8

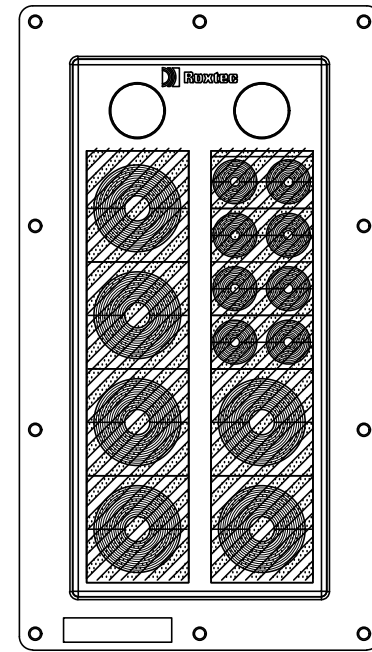


COMSEAL 32/14 ES/PE		
MODULE TYPE	RANGE	QTY
20w40/30	0+3.5-16.5	4
40 10-32/30	0+9.5-32.5	6

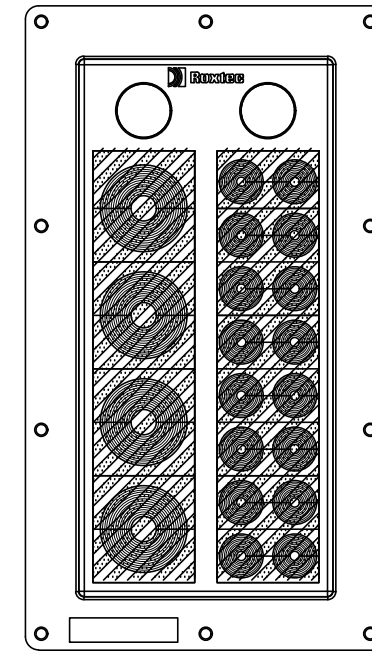

COMSEAL 32/20 ES/PE		
MODULE TYPE	RANGE	QTY
20w40/30	0+3.5-16.5	8
40 10-32/30	0+9.5-32.5	4

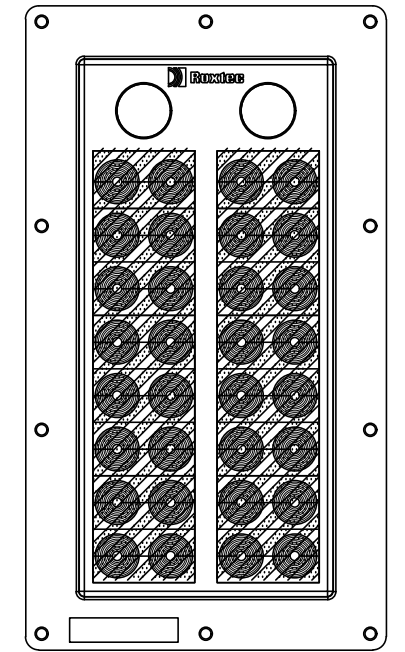

COMSEAL 32/32 ES/PE		
MODULE TYPE	RANGE	QTY
20w40/30	0+3.5-16.5	16

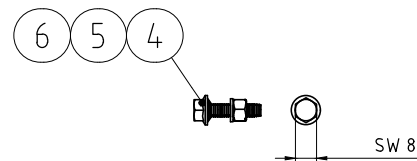

NOTE:

MODULES ARE AVAILABLE IN ES AND PE VERSION:  
 ES = ELECTROMAGNETIC SHIELDING (WHITE STRIPES)  
 PE = POTENTIAL EQUALIZATION (BLACK STRIPES)

Item	Qty	Designation	Specification	Net Weight
8	1	ASSEMBLY GEL		
7	1	INSTALLATION INSTRUCTION		
6	10	NUT	M6M M5 STAINLESS	
5	10	WASHER	BRB M5 STAINLESS	
4	10	SCREW	K6S M5x20 STAINLESS	
3	1	GASKET	CONDUCTIVE	
2	1	MODULE KIT	ACCORDING TO TABLE ABOVE	
1	1	FRAME	NICKELPLATED ALUMINIUM	

Rev	Type of revision	Date	Sign
G	SCREW LENGTH CORRECTED	2021-01-08	se-jenboh

General tolerances used for manufacturing shown in document DOC-00280		Designed by	Created Date	Latest save date	Format	Scale	Sheet no	Net Weight
		se-jenboh	2010-04-14	2021-11-25	A2	1:2		-
 www.roxtec.com		Title COMSEAL 32 ES/PE KIT SOLUTIONS		Restricted due to Information drawing		Drawing number S1020159		Projection method  Rev G

Information drawings show general design and nominal dimensions if not else stated