


格克赛克保留所有权利。未经授权严禁复制，使用以及向第三方泄露。

All rights reserved. Unauthorized reproduction, use or disclosure to third parties is strictly forbidden.

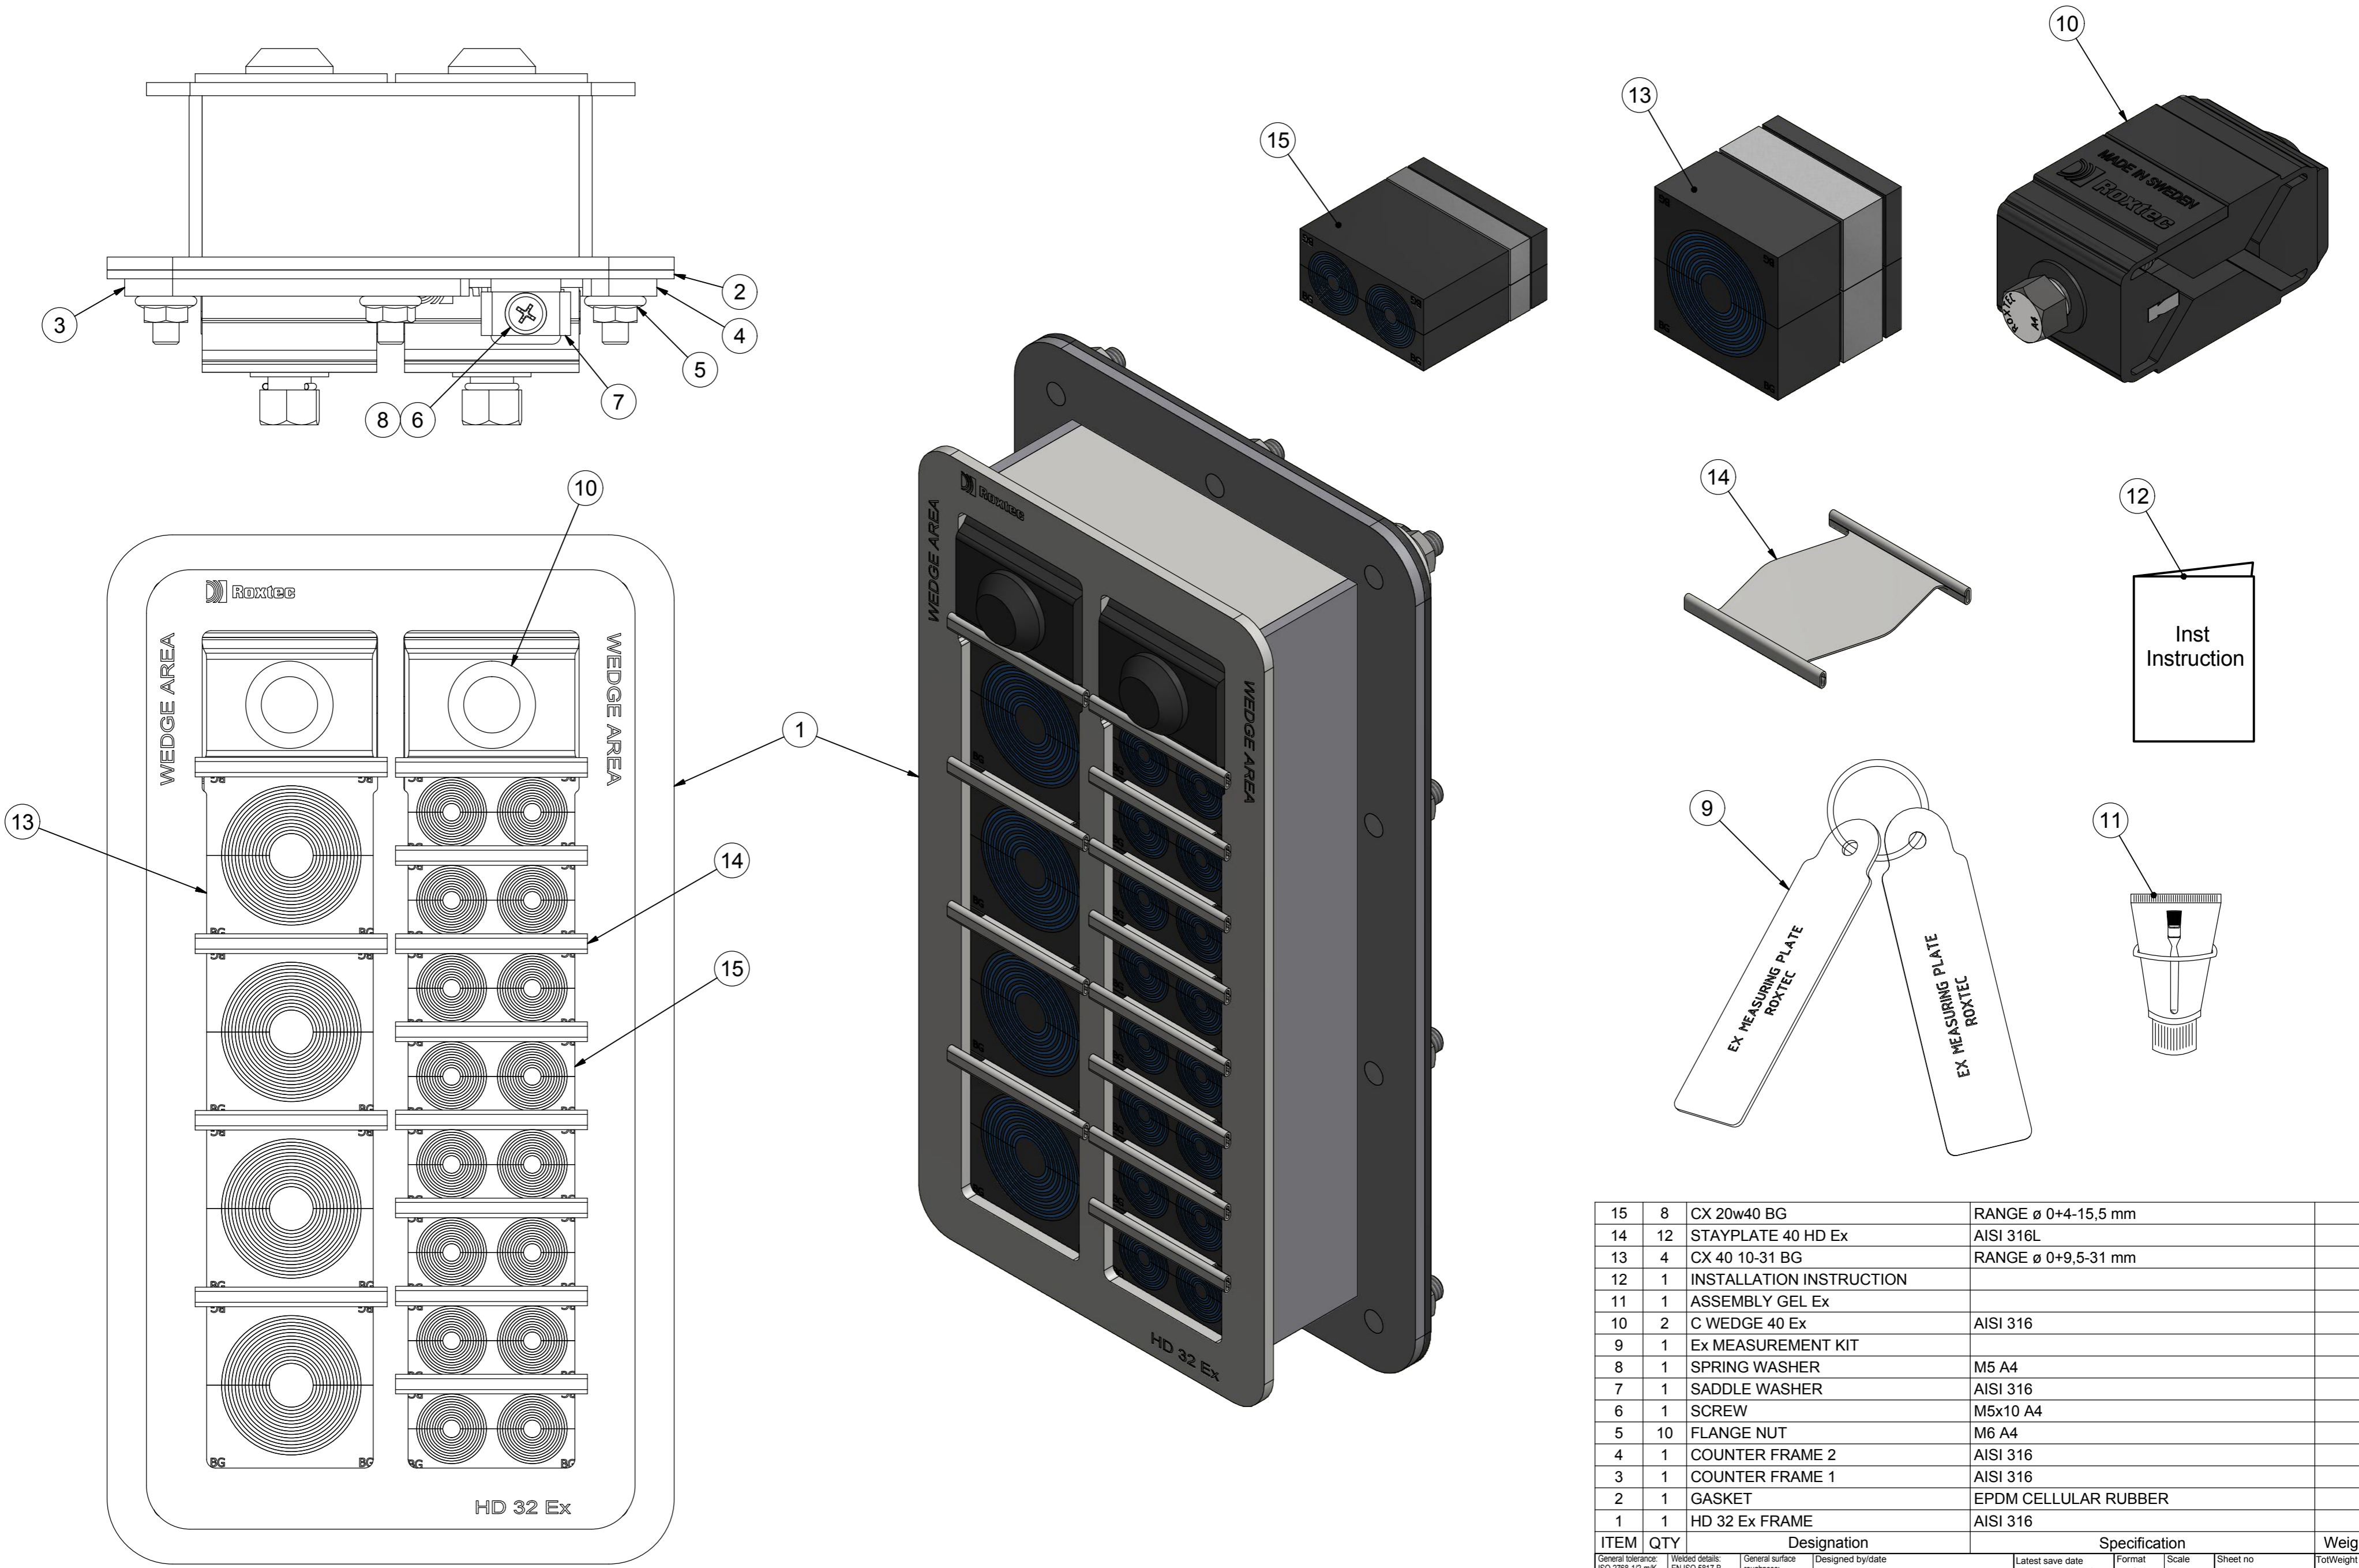

ITEM	QTY	Designation	Specification	Weight
15	8	CX 20w40 BG	RANGE \varnothing 0+4-15,5 mm	
14	12	STAYPLATE 40 HD Ex	AISI 316L	
13	4	CX 40 10-31 BG	RANGE \varnothing 0+9,5-31 mm	
12	1	INSTALLATION INSTRUCTION		
11	1	ASSEMBLY GEL Ex		
10	2	C WEDGE 40 Ex	AISI 316	
9	1	Ex MEASUREMENT KIT		
8	1	SPRING WASHER	M5 A4	
7	1	SADDLE WASHER	AISI 316	
6	1	SCREW	M5x10 A4	
5	10	FLANGE NUT	M6 A4	
4	1	COUNTER FRAME 2	AISI 316	
3	1	COUNTER FRAME 1	AISI 316	
2	1	GASKET	EPDM CELLULAR RUBBER	
1	1	HD 32 Ex FRAME	AISI 316	

General tolerance:		Welded details:		General surface roughness:		Design		Specification		Weight	
ISO 2768-1/2-m/K	EN ISO 13920-BF	EN ISO 5817-B	EN ISO 10042-B	Re 12,5	se-danstr	2016-02-01	2016-04-22	A2	1 / 1	N/A	
Title		Restricted due to		Drawing number		Rev					
Roxtec		HD 32/20 BG Ex ASSEMBLY KIT		Information drawing		S1509526		B			
www.roxtec.com											

Rev	Type of revision	Date	Sign
B		2016-04-22	se-danstr