



All rights reserved. Unauthorized reproduction, use or disclosure to third parties is strictly forbidden.
將克賽克保留所有权利。未经授权严禁复制，使用以及向第三方泄漏。

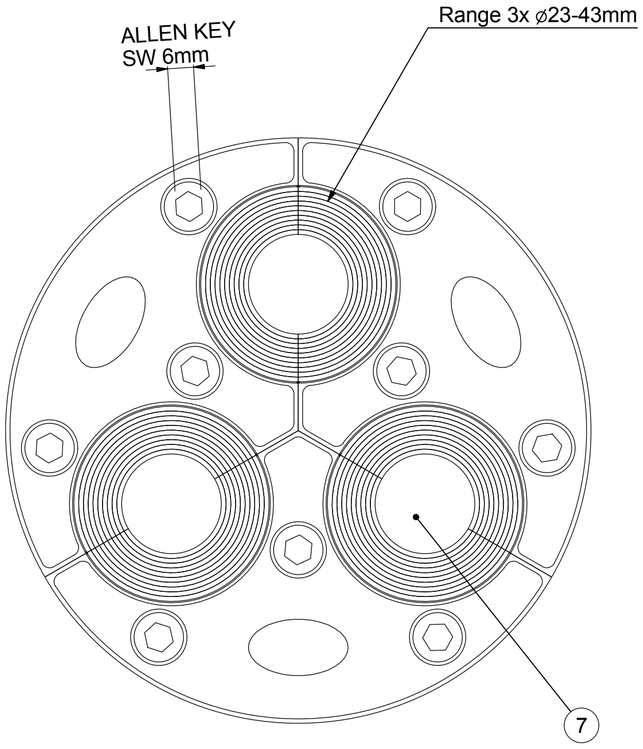

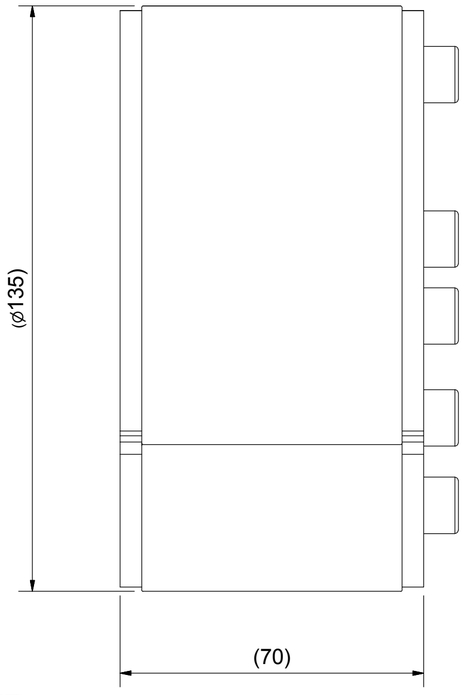

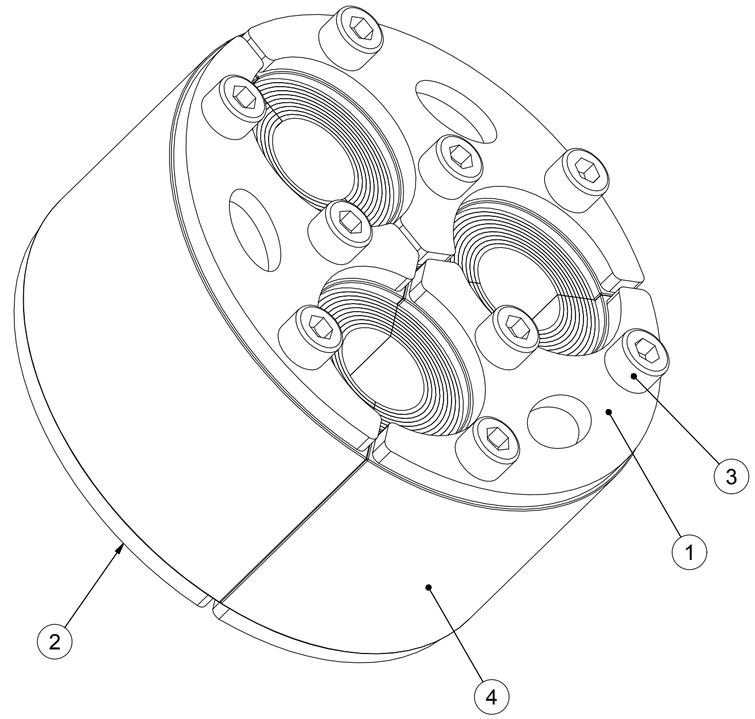

NOTE:
WOC VERSION IS WITHOUT CENTER CORES



ITEM	QTY	Designation	Specification	Weight
7	3	CENTER CORE	ROXYLON, NOT IN WOC VERSIONS	
6	1	INSTALLATION INSTRUCTION		
5	1	LUBRICANT	TALLOW	
4	3	RUBBER FRAME	ROXYLON HE	
3	9	SCREW	ISO 4762 M8x70 A4	
2	3	REAR FITTING	ACID PROOF STAINLESS STEEL T=5MM	
1	3	FRONT FITTING	ACID PROOF STAINLESS STEEL T=5MM	

General tolerance: ISO 2768-1/2-m/K EN ISO 13920-BF	Welded details: EN ISO 5817-B EN ISO 10042-B	General surface roughness: Ra 12,5	Designed by/date xx-emikul 2017-02-06	Latest save date 2017-02-10	Format A2	Scale	Sheet no 1 / 1	TotWeight N/A

Roxtec
www.roxtec.com

Title
H3 UG SEALS
H3 135 UG INSERTABLE

Projection method

Restricted due to: Information drawing

Drawing number: S1519413

Rev: A

Rev	Type of revision	Date	Sign
A		2017-02-06	se-jenboh