



洛克赛克保留所有权利。未经授权严禁复制，使用以及向第三方泄漏。



All rights reserved. Unauthorized reproduction, use or disclosure to third parties is strictly forbidden.

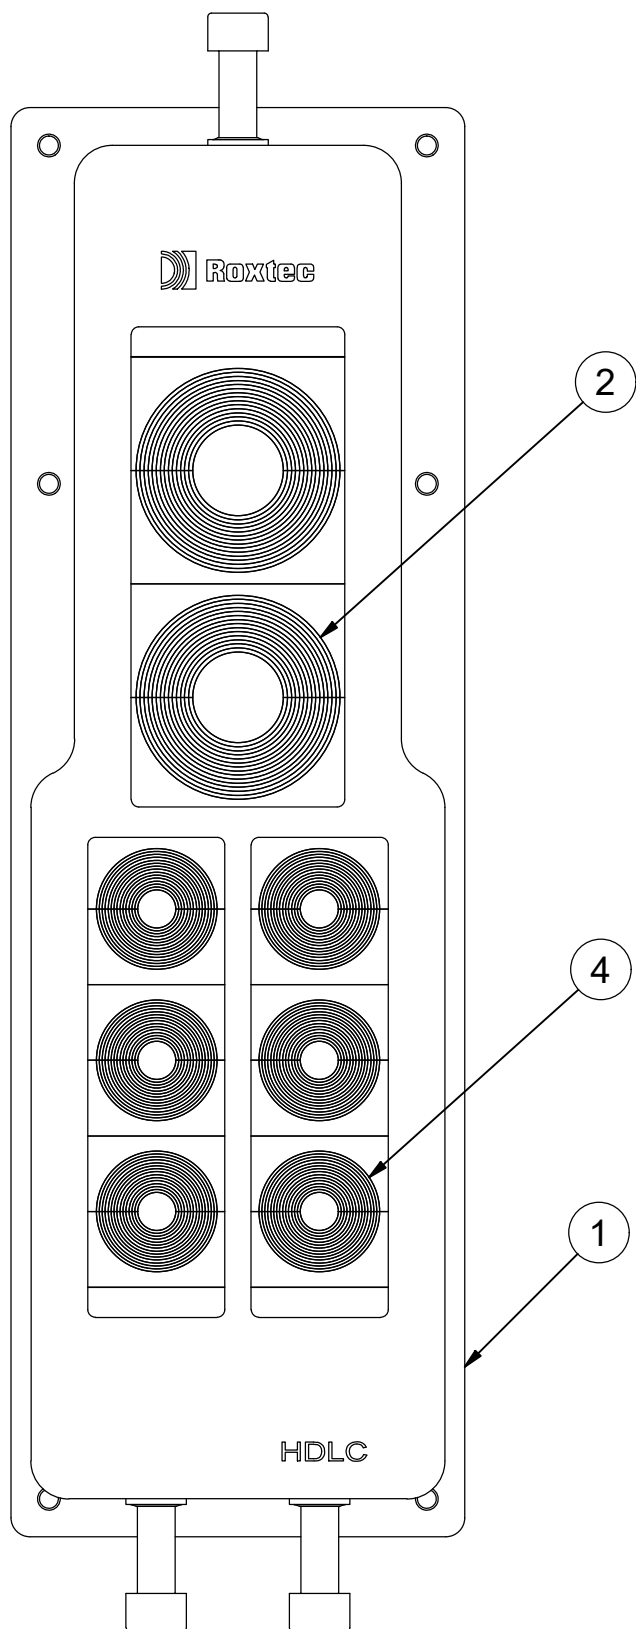

HDLC BG 6+2	
PCS	MODULES
6	RM 40 10-32 BG B
2	RM 60 24-54 BG B

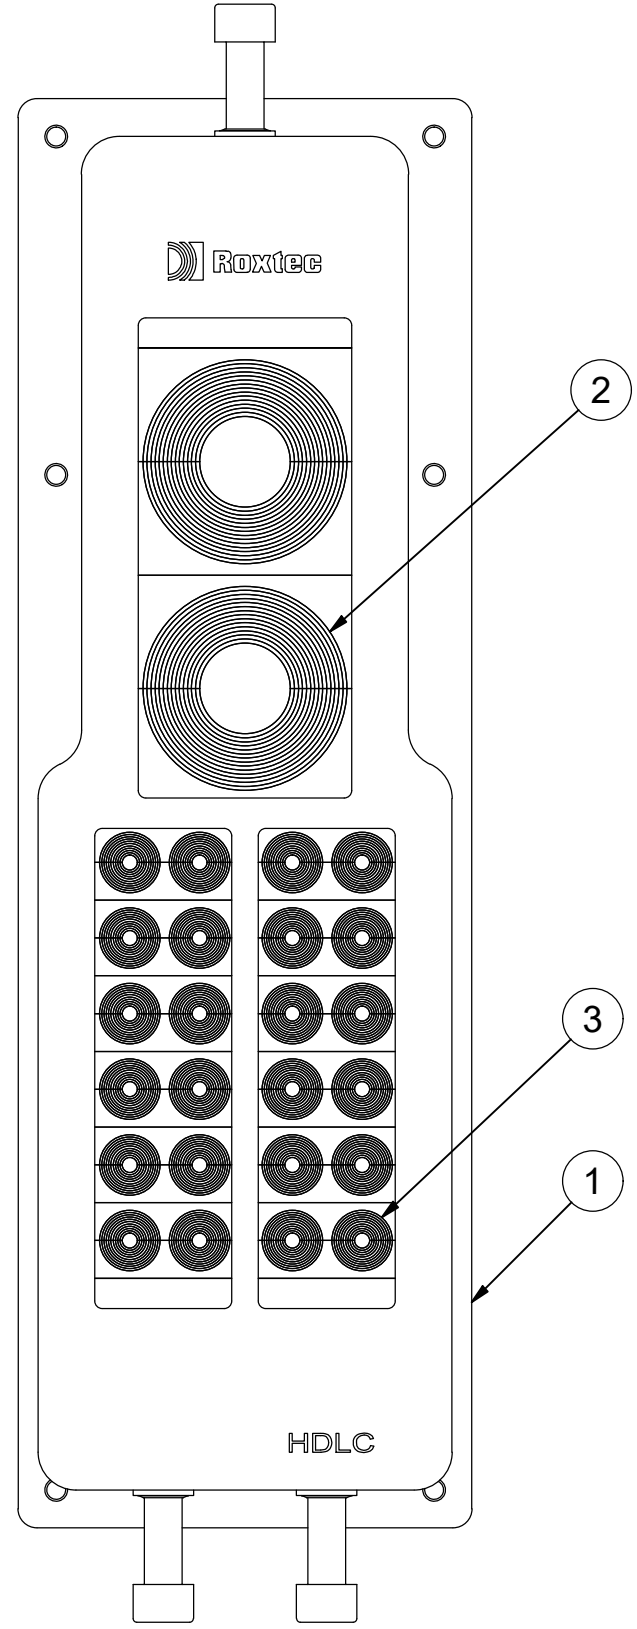

HDLC BG 24+2	
PCS	MODULES
12	RM 20w40 BG B
2	RM 60 24-54 BG B

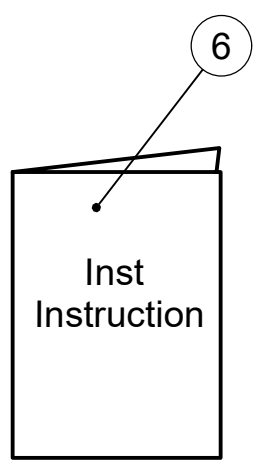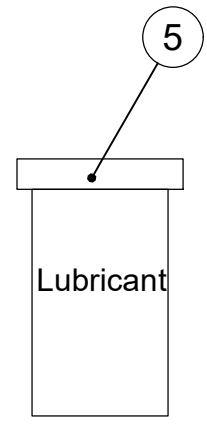

ITEM	QTY	Designation	Specification	Weight
6	1	INSTALLATION INSTRUCTION	HDLC BG	
5	1	LUBRICANT	TALLOW	
4	6	RM 40 10-32 BG B	RANGE $\varnothing$ 0+9.5-32.5	
3	12	RM 20w40 BG B	RANGE $\varnothing$ 0+3.5-16.5	
2	2	RM 60 24-54 BG B	RANGE $\varnothing$ 0+24.0-54.0	
1	1	HDLC FRAME	S1521729	

General tolerance: ISO 2768-1/2-m/K EN ISO 13920-BF	Welded details: EN ISO 5817-B EN ISO 10042-B	General surface roughness: Ra 12.5	Designed by/date se-danstr 2017-02-22	Latest save date 2024-03-21	Format A3	Scale	Sheet no 1 / 1	TotWeight N/A
		Title HDLC BG KITS			Projection method 		Rev C	
		Restricted due to www.roxtec.com			Drawing number S1519912		Information drawing	

C		2020-12-18	se-henols
Rev	Type of revision	Date	Sign