


洛克赛克保留所有权利。未经授权严禁复制，使用以及向第三方泄漏。



All rights reserved. Unauthorized reproduction, use or disclosure to third parties is strictly forbidden.

VERSION A

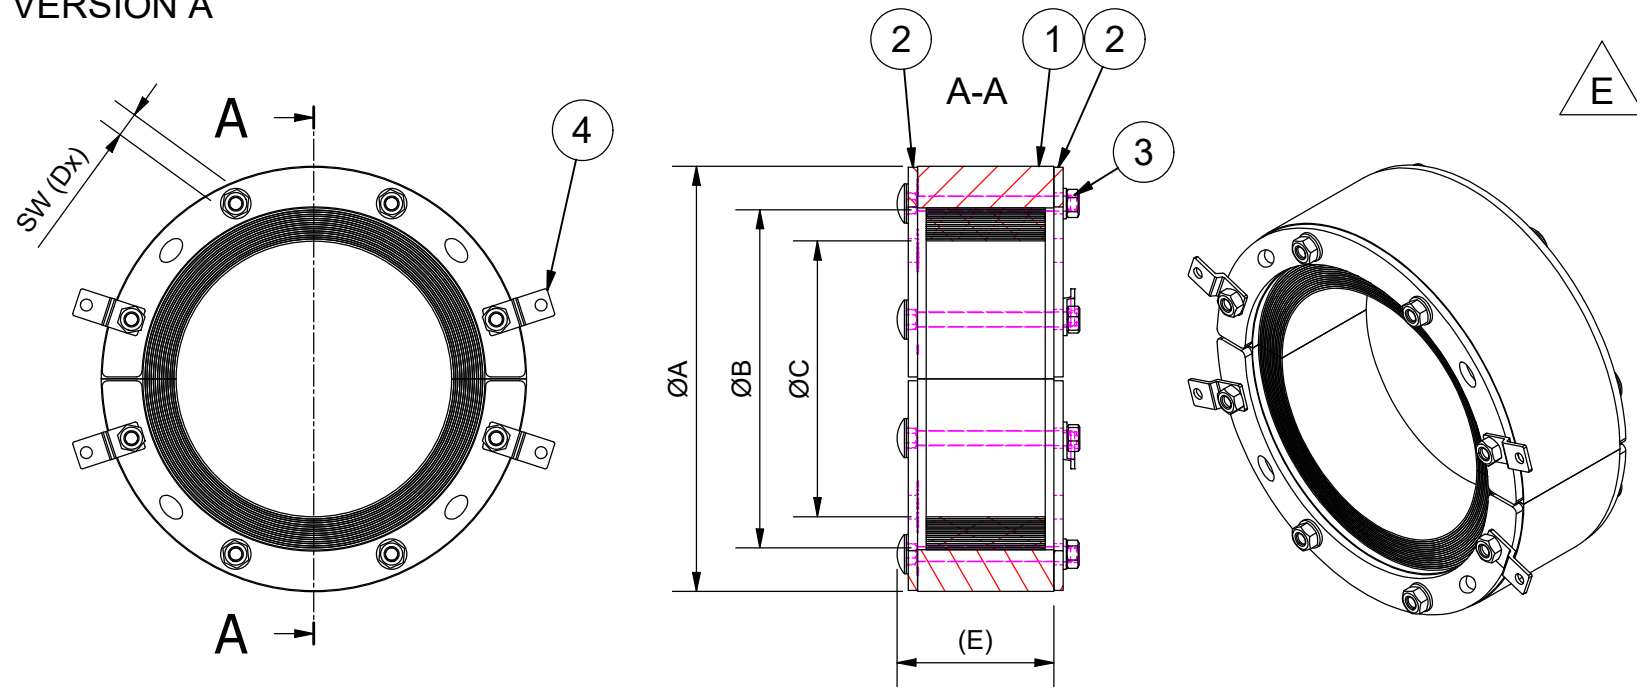

TYPE	SIZE A (MM)	APERTURE (MM)	RANGE C-B (MM)	D (QTY)	SW (MM)	E (MM)	VER.	T (MM)
RS 200 (8") UG	200	200-205	130-163	8	10	83	A	-
RS 205 UG	205	205-210	130-163	8	10	83	B	2.5
RS 210 UG	210	210-215	130-163	8	10	83	B	5
RS 225 UG	225	225-230	146-179	8	13	83	A	-
RS 230 UG	230	230-235	146-179	8	13	83	B	2.5
RS 235 UG	235	235-240	146-179	8	13	83	B	5
RS 250 UG	250	250-255	171-204	10	13	80	A	-
RS 255 UG	255	255-260	171-204	10	13	80	B	2.5
RS 260 UG	260	260-265	171-204	10	13	80	B	5

VERSION B

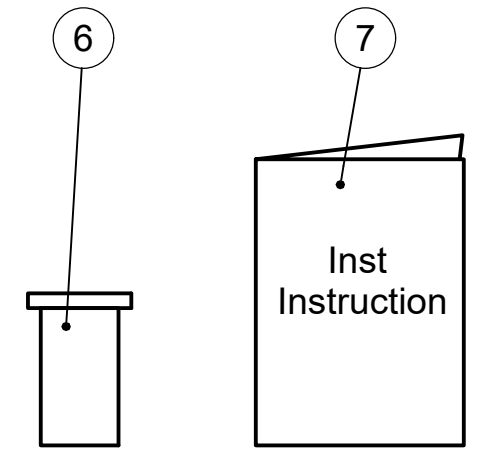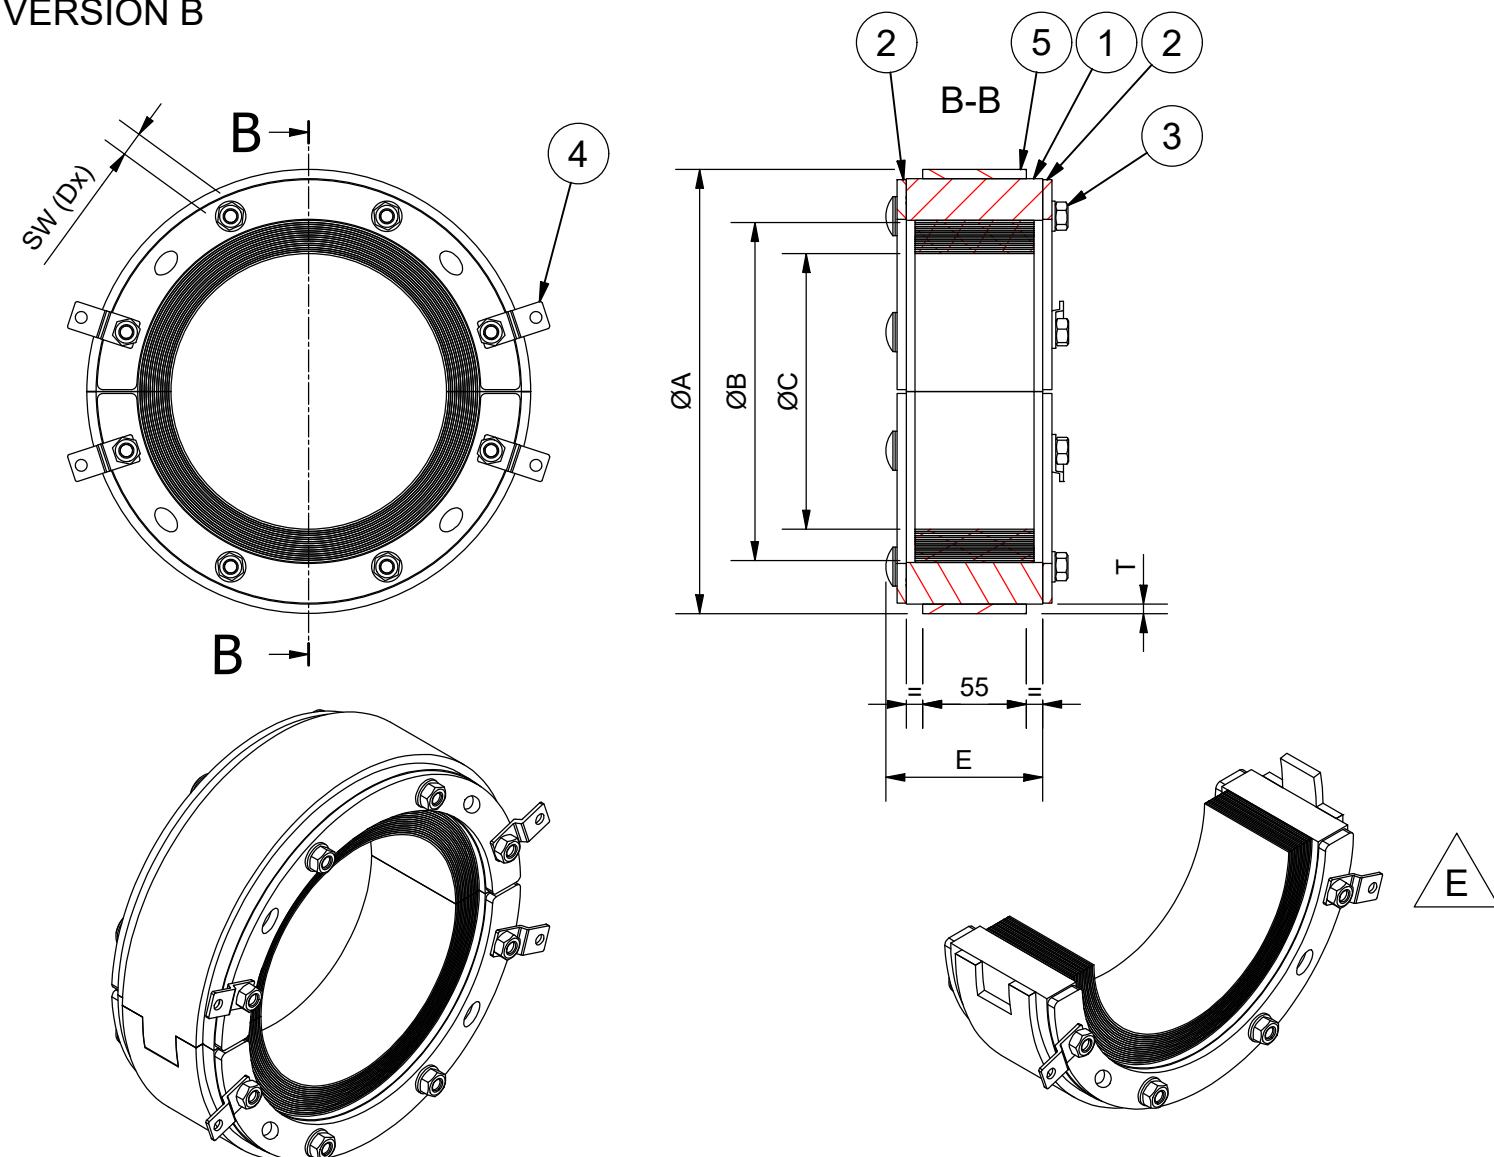

ITEM	QTY	Designation	Specification	Weight
7	1	INSTALLATION INSTRUCTION		
6	1	LUBRICANT	TALLOW	
5	2	OUTER DIAMETER EXTENSION	ROXYLON (NOT ON VERSION A)	
4	4	STOP FLANGE	A4	
3	D	FASTENERS	M6/ M8 A4	
2	4	FITTING	ACID PROOF STAINLESS STEEL	
1	2	RUBBER FRAME	ROXYLON	

General tolerance:		Welded details:		General surface roughness:		Designed by/date		Latest save date		Format		Scale		Sheet no		TotWeight	
ISO 2768-1/2-m/K		EN ISO 5817-B		Ra 12.5		se-larlar 2017-05-15		2018-06-01		A3				1 / 1			
EN ISO 13920-BF		EN ISO 10042-B															
						Title										Projection method	
						RS UG PRODUCTS										⊕	
						RS 200-260 UG WOC											
						Restricted due to										Rev	
						www.roxtec.com		Information drawing		Drawing number		S1522905				E	

Rev	Type of revision	Date	Sign
E	TABLE UPDATED.	2023-01-18	se-larlar