


烙克赛克保留所有权利。未经授权严禁复制、使用以及向第三方泄露。


All rights reserved. Unauthorized reproduction, use or disclosure to third parties is strictly forbidden.

Rev 3.1

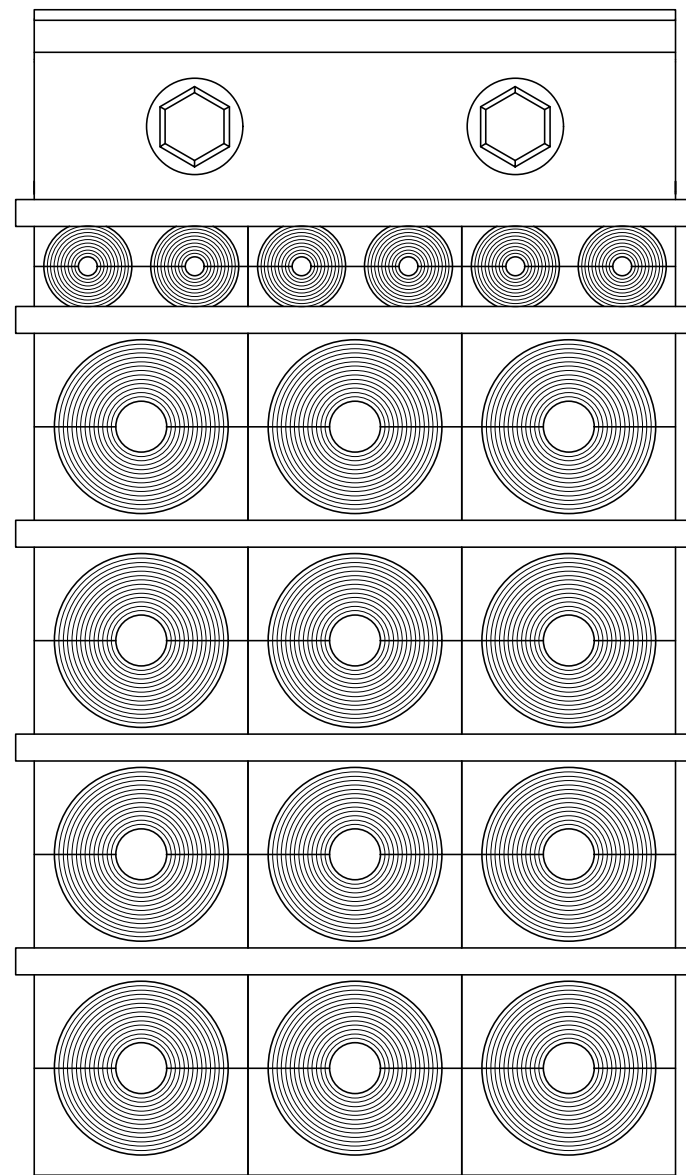


**SEALING KIT 6/18**

- 12x RM 40 10-32 RANGE  $\phi 0+9,5-32,5$
- 3x RM 20w40 RANGE  $\phi 0+3,5-16,5$
- 5x STAYPLATE
- 1x WEDGE 120
- 2x LUBRICANT
- 1x INSTALLATION INSTRUCTION

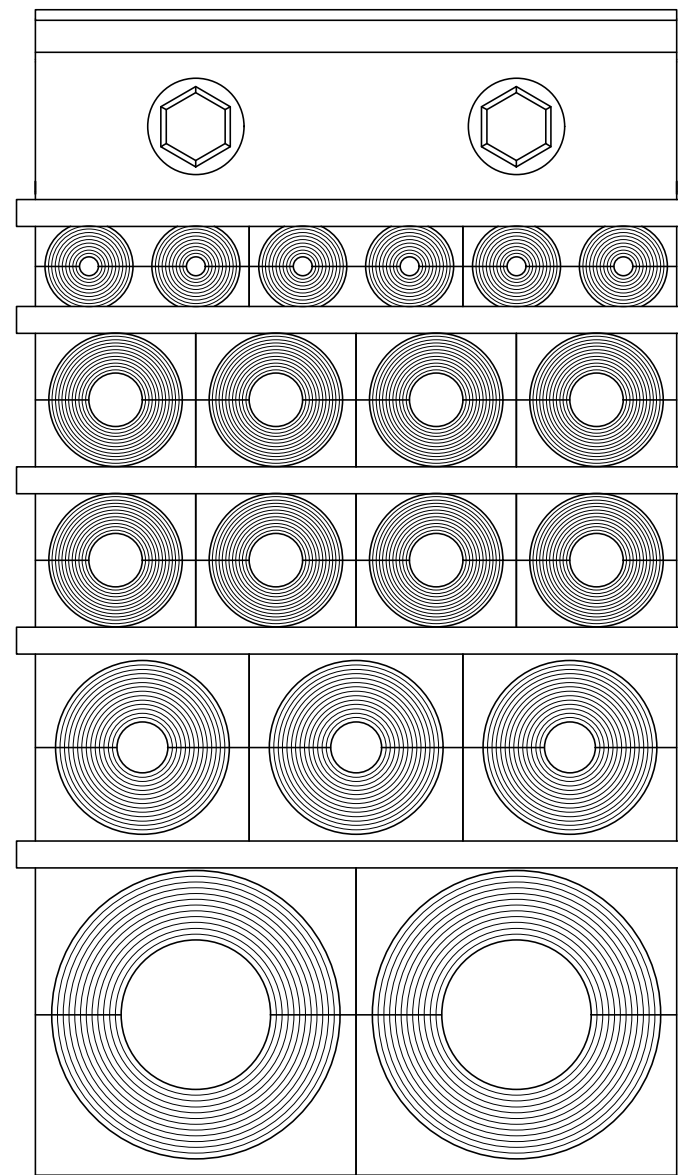

**SEALING KIT 6/19**

- 2x RM 60 RANGE  $\phi 0+28-54$
- 3x RM 40 10-32 RANGE  $\phi 0+9,5-32,5$
- 8x RM 30 RANGE  $\phi 0+10-25$
- 3x RM 20w40 RANGE  $\phi 0+3,5-16,5$
- 5x STAYPLATE
- 1x WEDGE 120
- 2x LUBRICANT
- 1x INSTALLATION INSTRUCTION

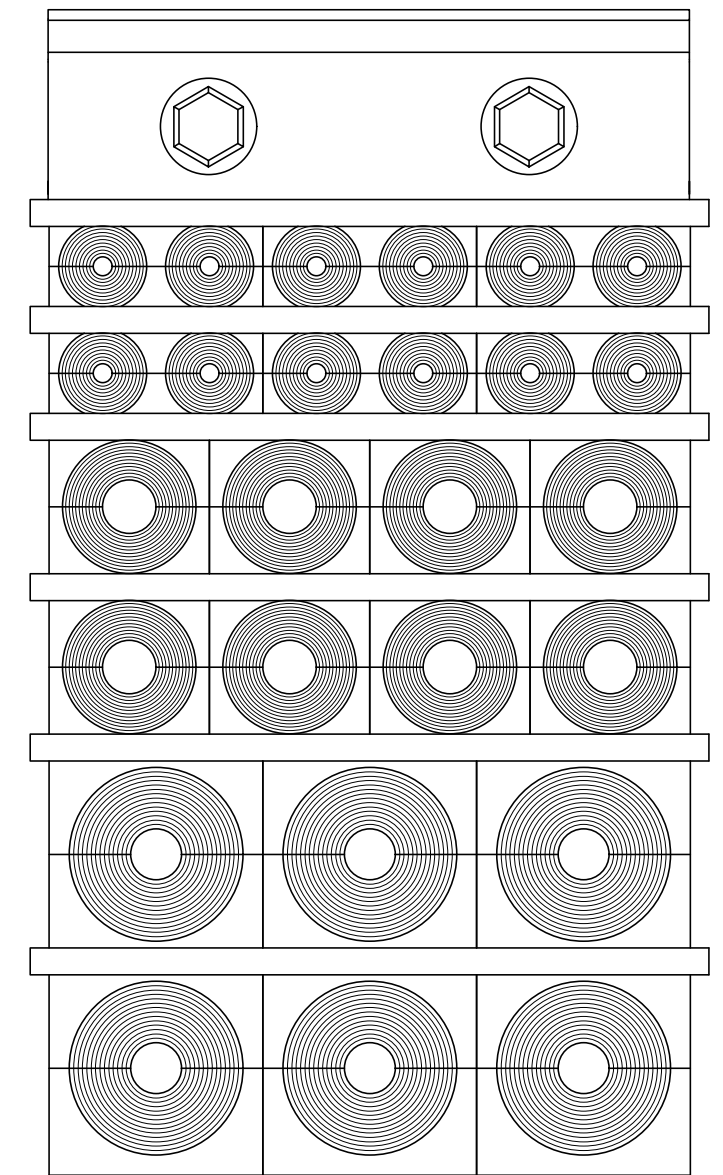

**SEALING KIT 6/26**

- 6x RM 40 10-32 RANGE  $\phi 0+9,5-32,5$
- 8x RM 30 RANGE  $\phi 0+10-25$
- 6x RM 20w40 RANGE  $\phi 0+3,5-16,5$
- 6x STAYPLATE
- 1x WEDGE 120
- 2x LUBRICANT
- 1x INSTALLATION INSTRUCTION



NOTE:  
SEALING KITS ARE AVAILABLE IN GALVANIZED AND ACID PROOF STAINLESS STEEL VERSIONS.

C	ADD 1 LUBRICANT	2024-08-15	se-henols
Rev	Type of revision	Date	Sign

Item	Qty	Designation	Specification				Net Weight	
General tolerances used for manufacturing shown in document DOC-002100		Designed by	Created Date	Latest save date	Format	Scale	Sheet no	Tot Weight
		se-jenboh	2018-04-13	2024-08-15	A2	1:1		-
		Title		Projection method				
		SEALING KIT						
		6/18, 6/19, 6/26						
		Restricted due to		Drawing number		Rev		
		Information drawing		S1532066		C		

Information drawings show general design and nominal dimensions if not else stated