



洛克赛克保留所有权利。未经授权严禁复制、使用以及向第三方泄露。

All rights reserved. Unauthorized reproduction, use or disclosure to third parties is strictly forbidden.


Rev 1.0

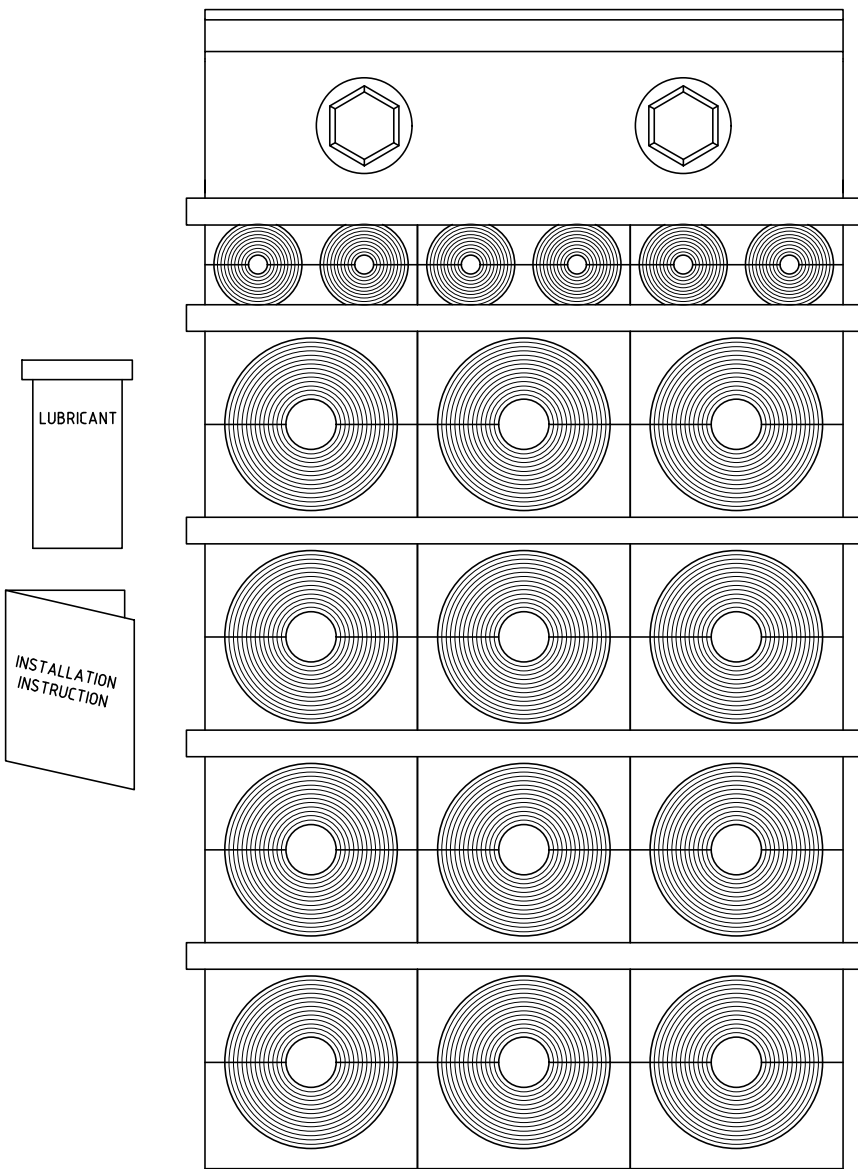

- ⚠ **SEALING KIT 6/18 ES B**
 12x RM 40 10-32 ES B RANGE $\phi 0+9,5-32,5$
 3x RM 20w40 ES B RANGE $\phi 0+3,5-16,5$
 5x STAYPLATE
 1x WEDGE 120 ES
 1x LUBRICANT
 1x INSTALLATION INSTRUCTION

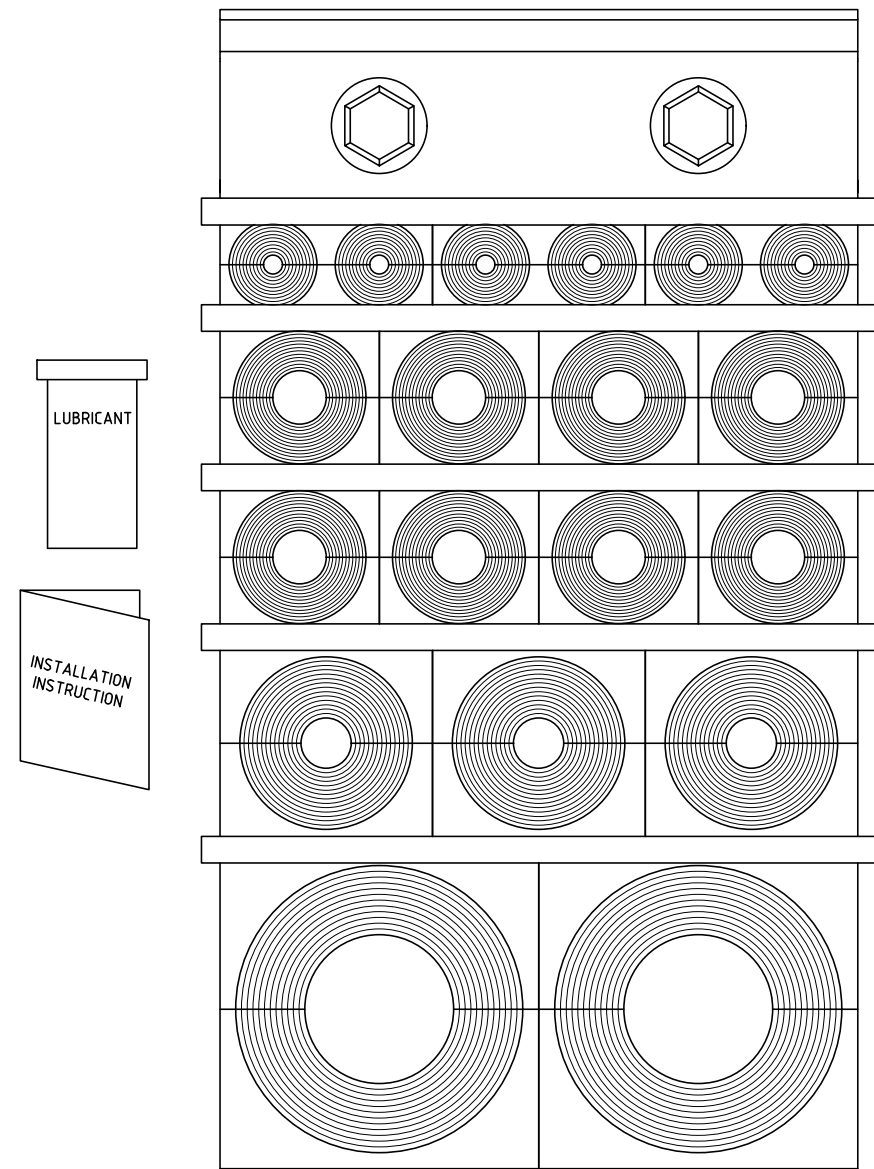

- ⚠ **SEALING KIT 6/19 ES B**
 2x RM 60 ES B RANGE $\phi 0+28-54$
 3x RM 40 10-32 ES B RANGE $\phi 0+9,5-32,5$
 8x RM 30 ES B RANGE $\phi 0+10-25$
 3x RM 20w40 ES B RANGE $\phi 0+3,5-16,5$
 5x STAYPLATE
 1x WEDGE 120 ES
 1x LUBRICANT
 1x INSTALLATION INSTRUCTION

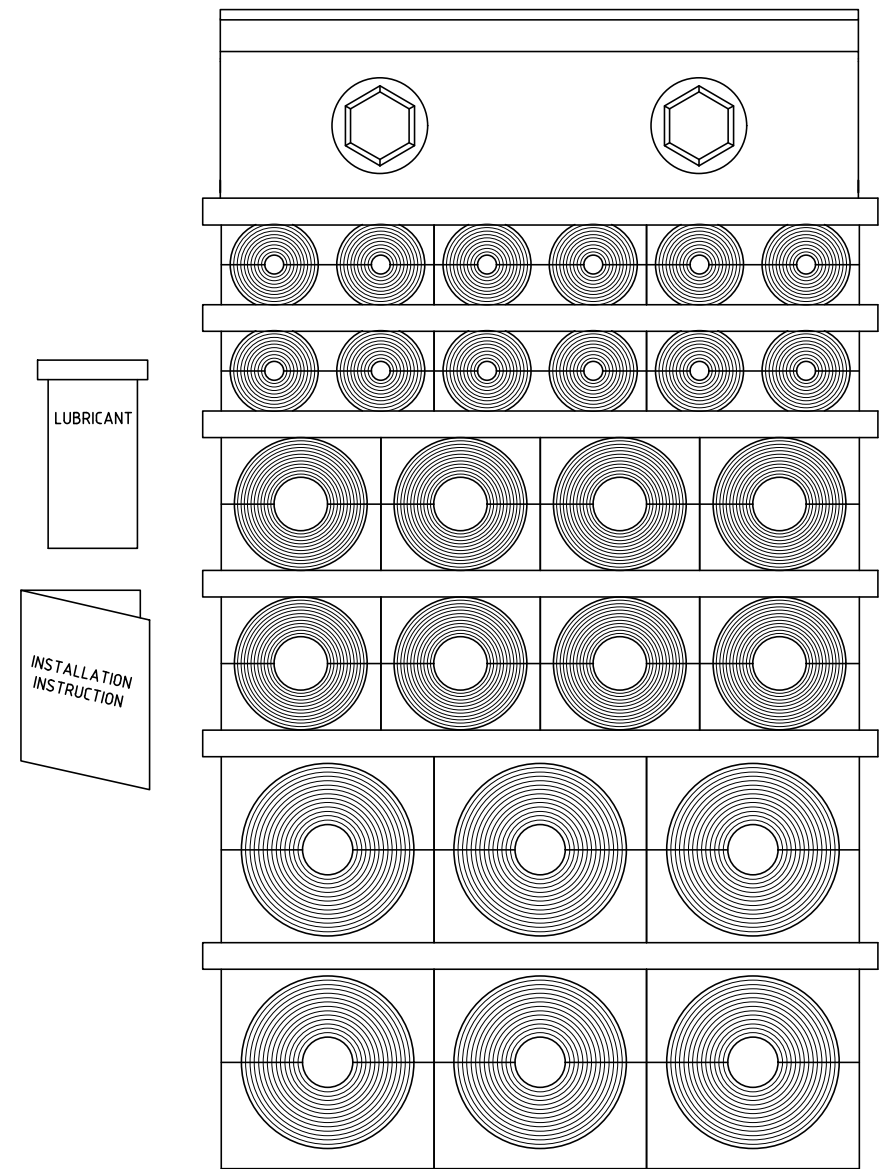

- ⚠ **SEALING KIT 6/26 ES B**
 6x RM 40 10-32 ES B RANGE $\phi 0+9,5-32,5$
 8x RM 30 ES B RANGE $\phi 0+10-25$
 6x RM 20w40 ES B RANGE $\phi 0+3,5-16,5$
 6x STAYPLATE
 1x WEDGE 120 ES
 1x LUBRICANT
 1x INSTALLATION INSTRUCTION

NOTE:
 SEALING KITS ARE AVAILABLE IN GALVANIZED AND ACID PROOF STAINLESS STEEL VERSIONS.

| | | | |
|-----|------------------|------------|-----------|
| B | ECN-001414 | 2018-10-01 | se-mikgru |
| Rev | Type of revision | Date | Sign |

| Item | Qty | Designation | Specification | Net Weight |
|---------------------|-----|----------------|-------------------------------|-------------------|
| General Intolerance | | Welded details | General surface roughness, Ra | Designed by |
| ISO 2768-MT-AK | | EN ISO 5817-B | 12,5 | Created Date |
| EN ISO 19728-BF | | EN ISO 10042-B | | Latest save date |
| | | | | Format |
| | | | | Scale |
| | | | | Sheet no |
| | | | | Projection method |
| | | | | Rev |

| | | | |
|-------------------|--|---------------------|--|
| Title | | Drawing number | |
| SEALING KIT ES B | | S1532073 | |
| 6/18, 6/19, 6/26 | | Information drawing | |
| Restricted due to | | | |

