

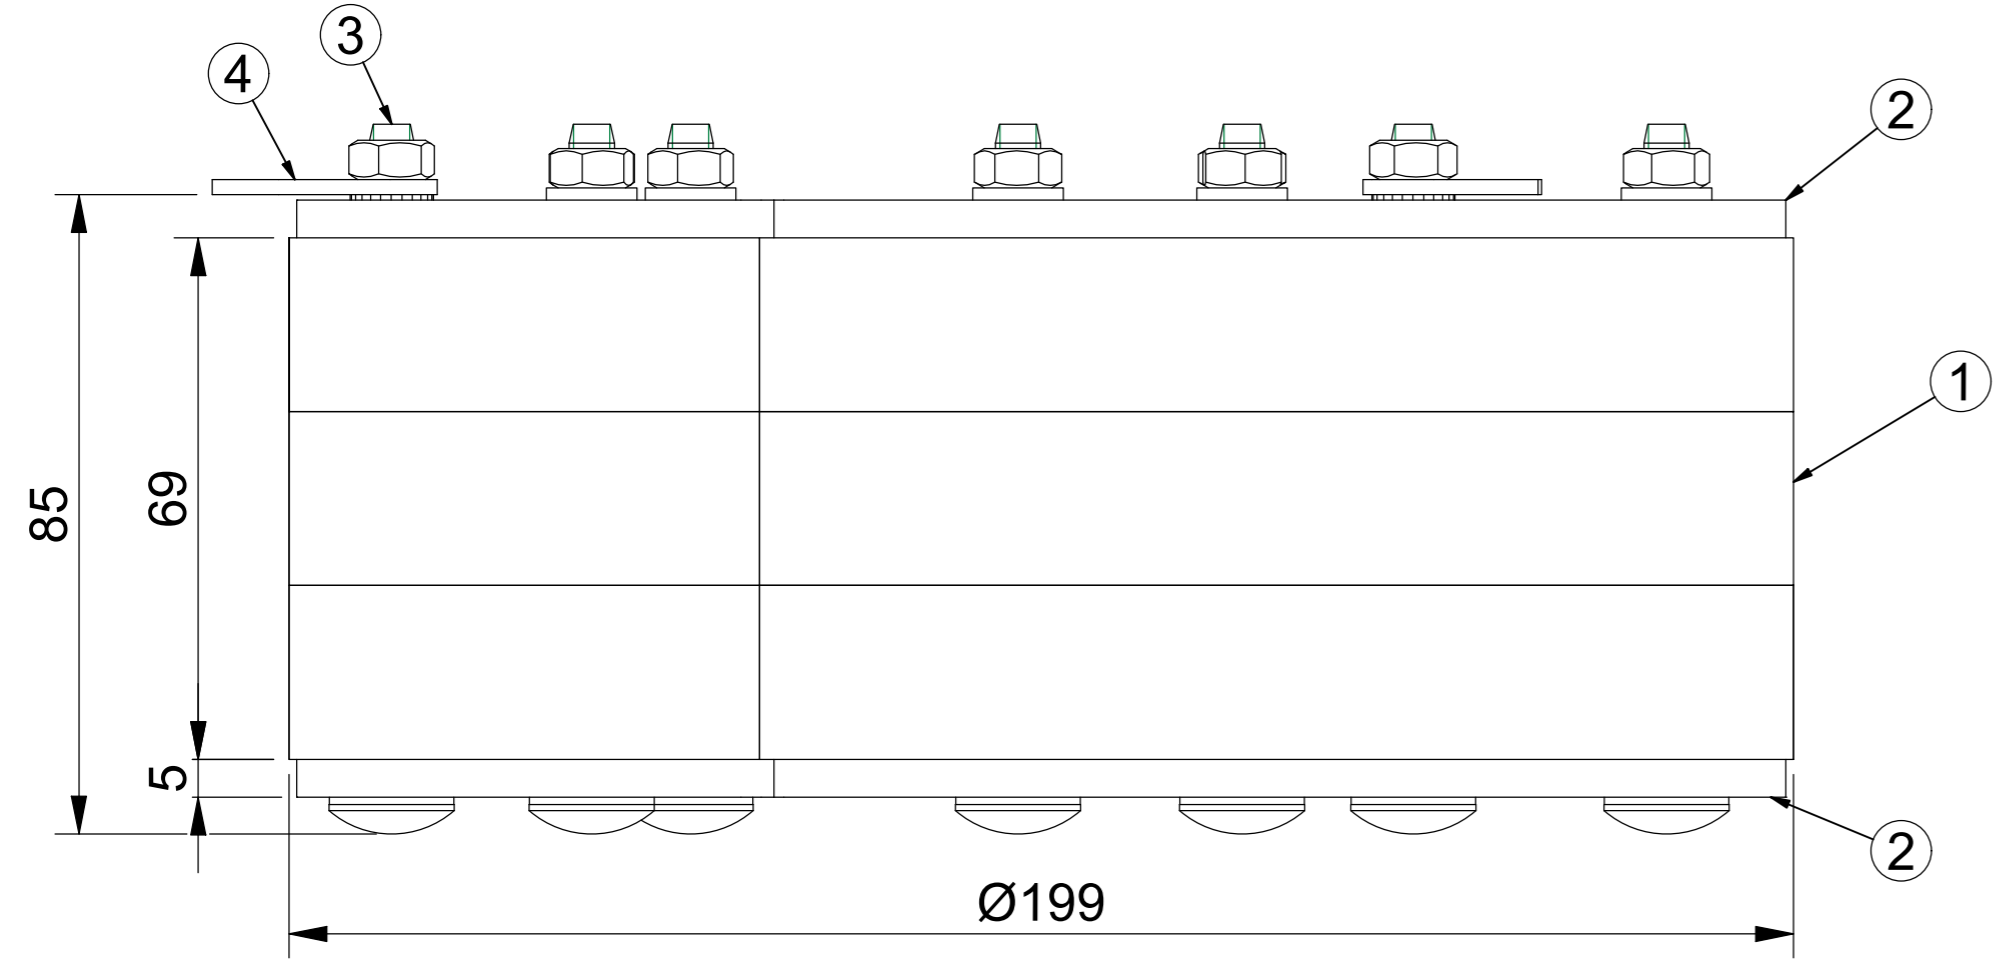
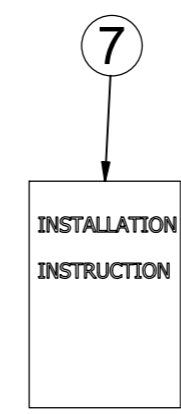
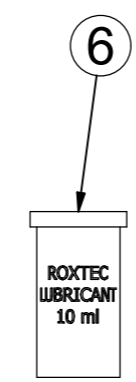
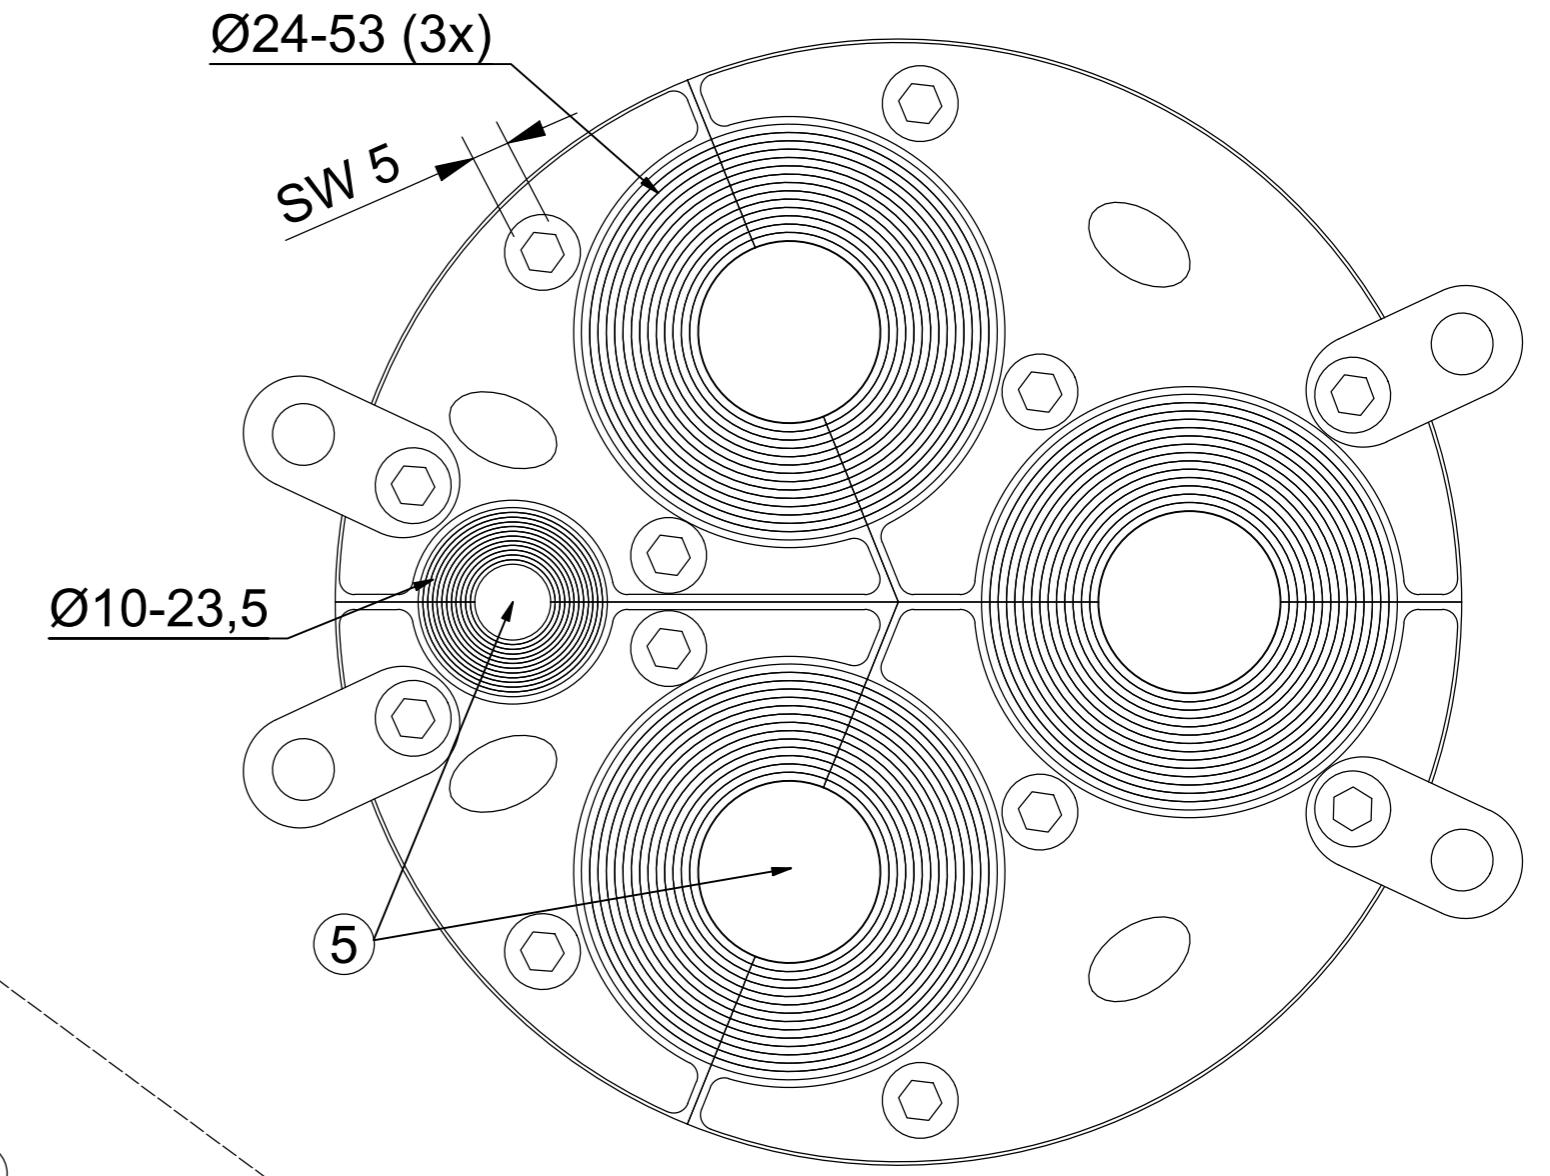


未经授权复制或再行发布，未经书面许可，
 使用以及向第三方泄露

H3+1 200 UG

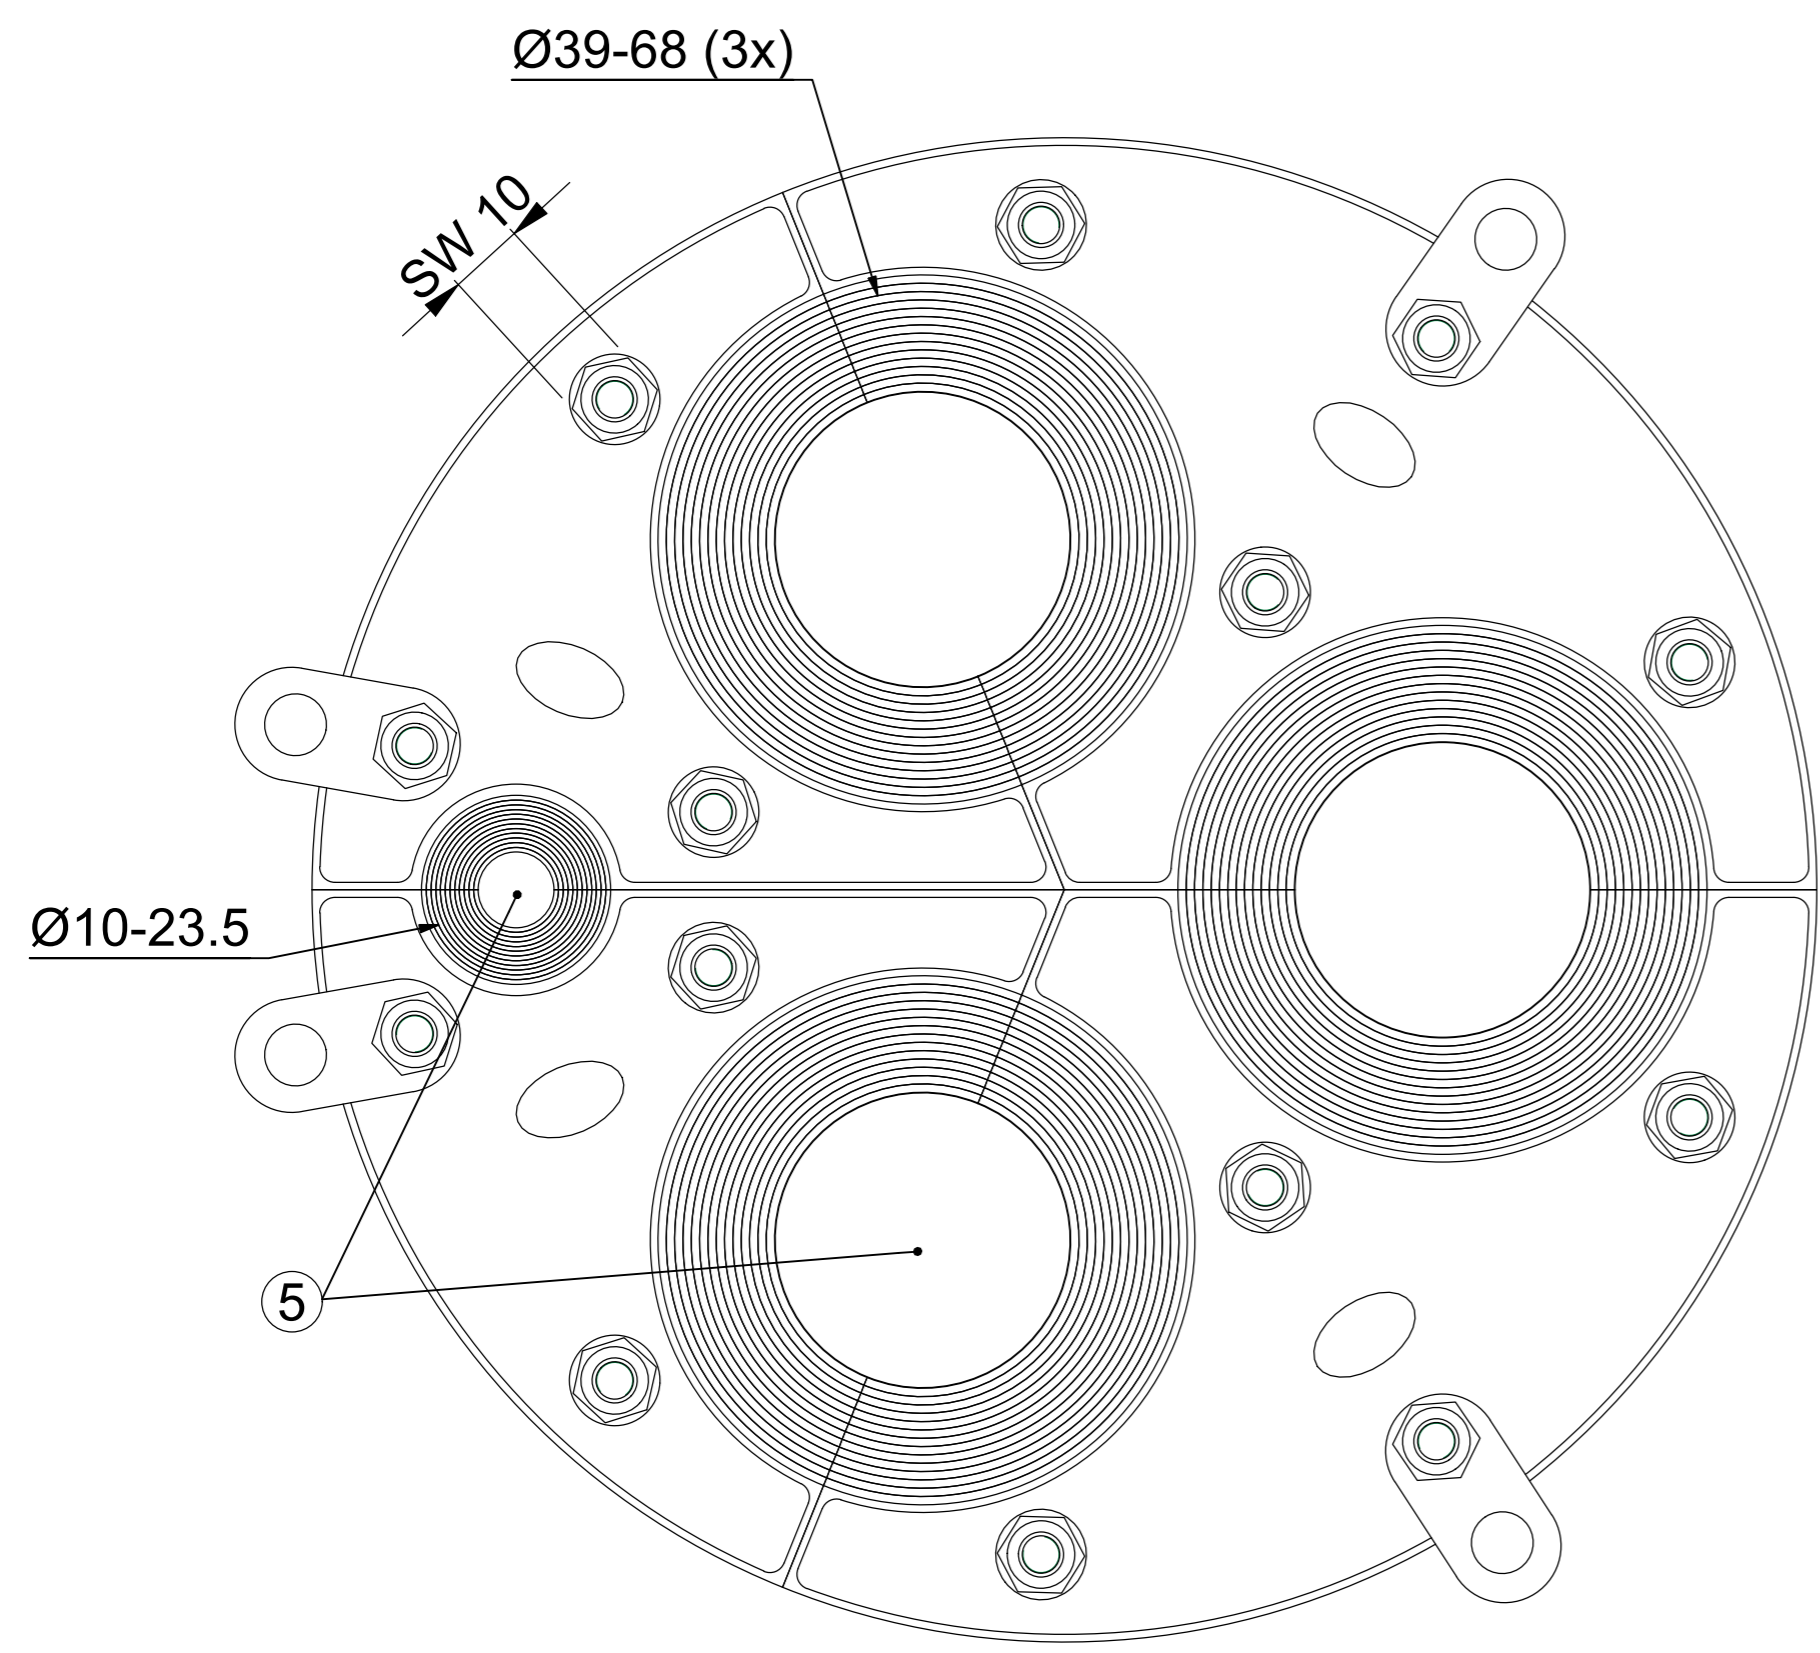

H3+1 150 UG

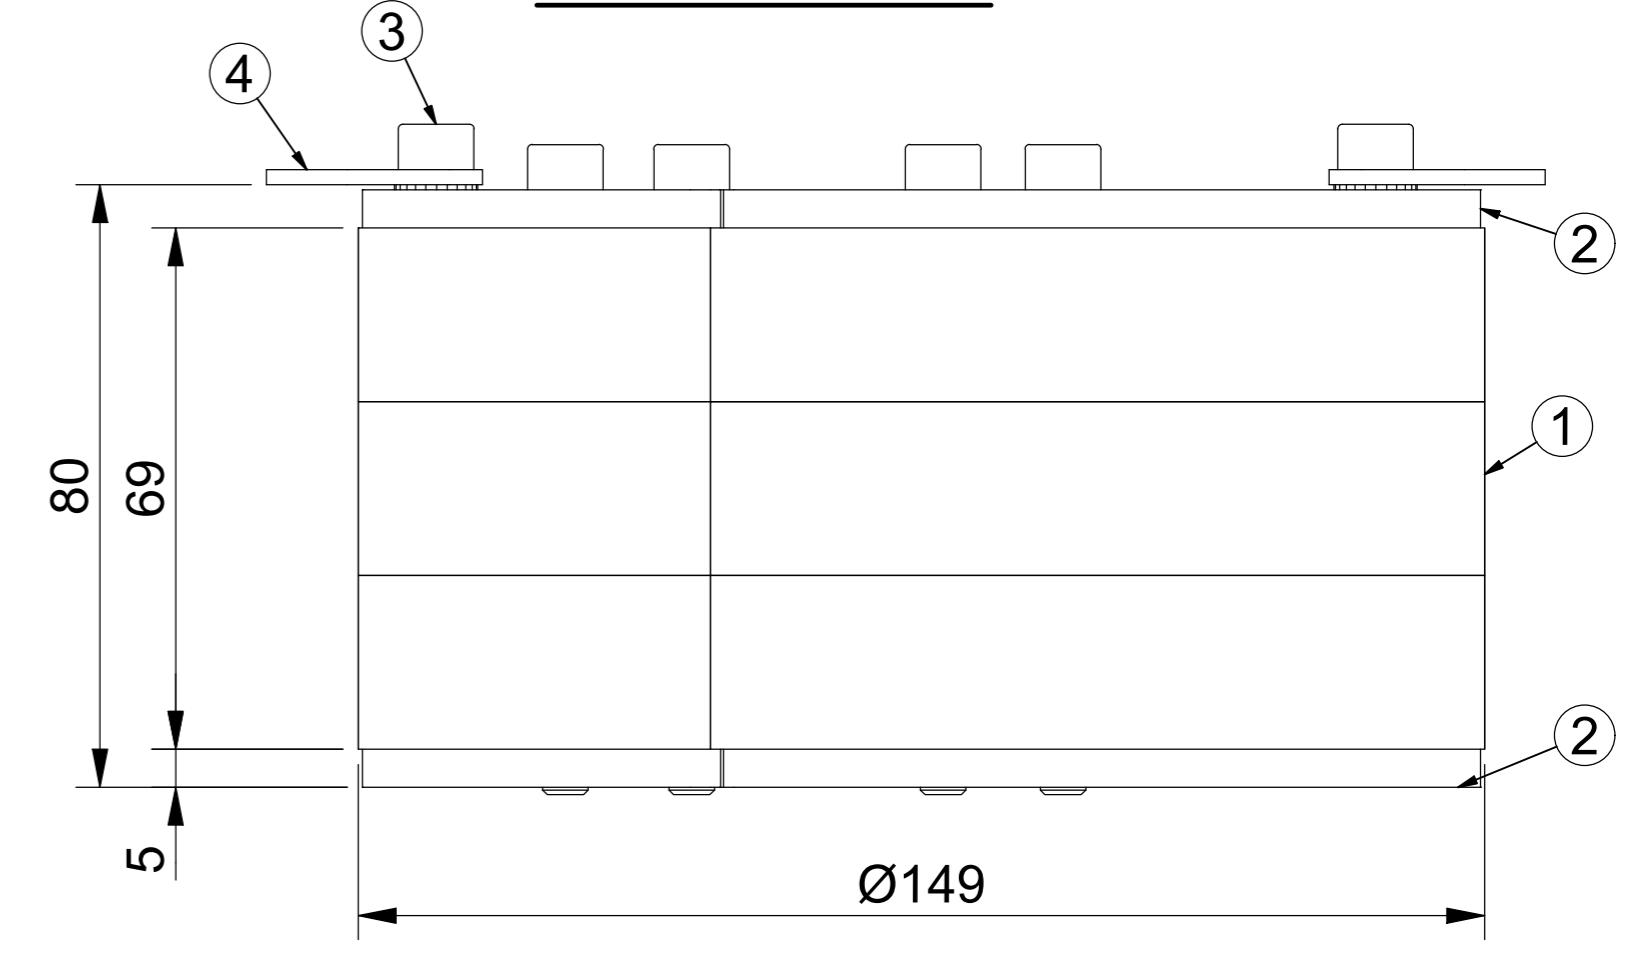

△ D

ITEM	QTY	Designation	Specification	Weight			
7	1	INSTALLATION INSTRUCTION					
6	1	LUBRICANT	TALLOW				
5	4	CORES	ROXYLON				
4	4	STOP FLANGE	ACID PROOF STAINLESS STEEL				
3	-	FASTENERS	M6 A4				
2	8	FITTINGS	ACID PROOF STAINLESS STEEL				
1	4	RUBBER FRAMES	ROXYLON				
General tolerances used for manufacturing shown in document DOC-002180		Designed by/date se-larlar 2019-01-18	Latest save date 2021-08-26	Format A2	Scale 1 / 1	Sheet no 1 / 1	TotWeight 4,3 kg
Title H3+1 UG SEALS H3+1 150 UG & H3+1 200 UG		Restricted due to Information drawing		Drawing number S1539766		Rev D	

Information drawings show general design and nominal dimensions if not else stated

Rev	Type of revision	Date	Sign
D	H3+1 150 UG ADDED.	2020-11-24	se-jenboh

Rev 2.0 All rights reserved. Unauthorized reproduction, use or disclosure to third parties is strictly forbidden