

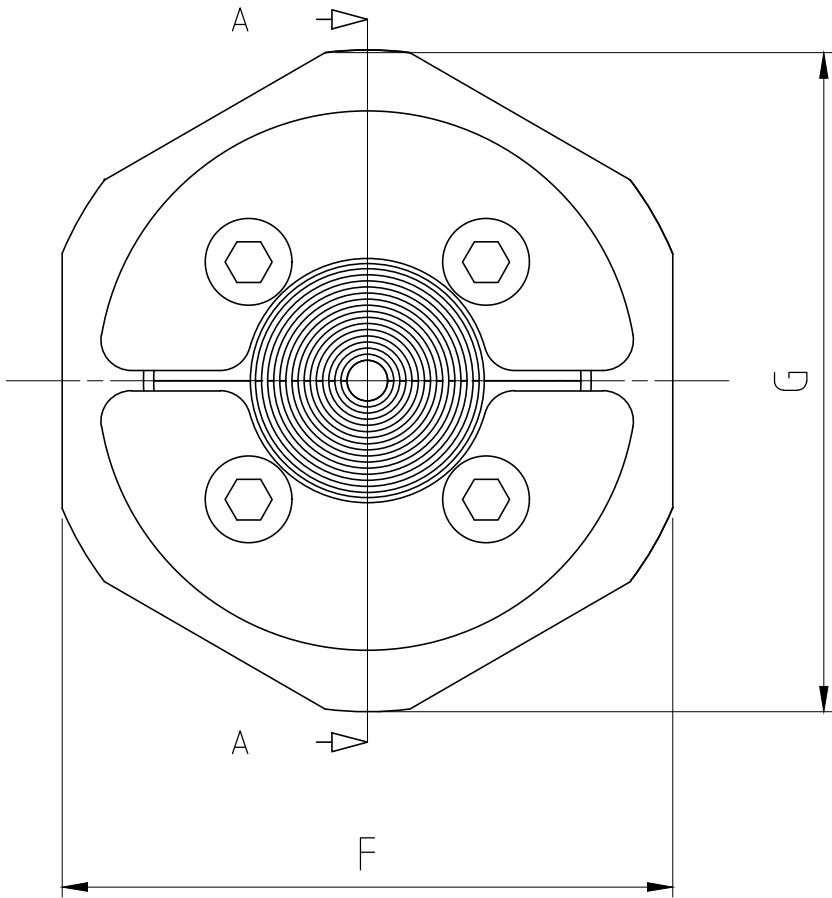


特克塞克保留所有权利。未经授权严禁复制，
使用以及向第三方泄漏。


All rights reserved. Unauthorized reproduction, use
or disclosure to third parties is strictly forbidden.

Rev 2.0

TYPE	C R S T 25	C R S T 31
DIMENSIONS	mm / "	mm / "
CABLE DIAMETER	0+3.6-12 / 0+0.142-0.472	0+4-17 / 0+0.175-0.669
THREAD	M32x1.5	M40x1.5
REC HOLECUT	32 / 1.260	40 / 1.575
A	32 / 1.260	40 / 1.575
B	1-10 / 0.039-0.394	1-8 / 0.039-0.315
C	4 / 0.157	5 / 0.197
D	16 / 0.630	15 / 0.590
E	25 / 0.984	25 / 0.984
F	36 / 1.417	46 / 1.811
G	39 / 1.535	50 / 1.968
H	25 / 0.984	31 / 1.220

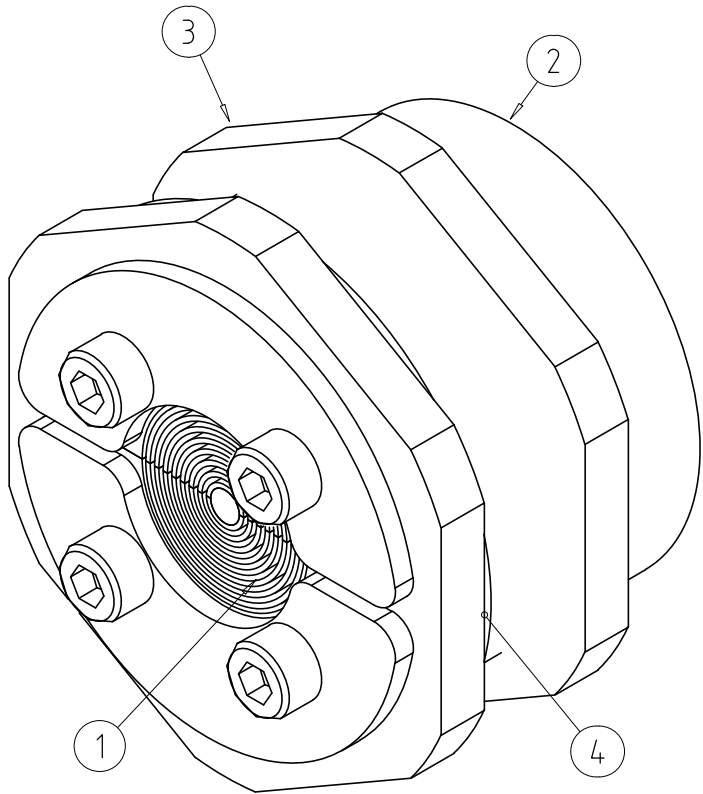

MATERIAL - BRASS
SURFACE TREATMENT - NICKEL PLATED
MATERIAL - STAINLESS STEEL

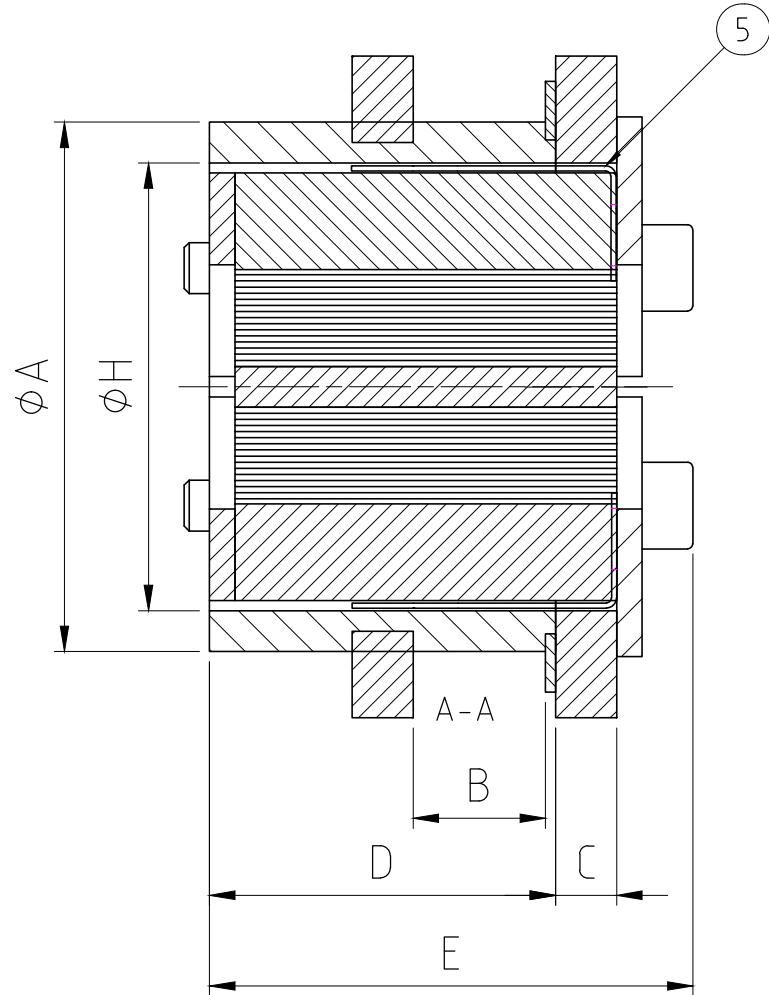

5	1	CLIP	Stainless Steel	-
4	1	GASKET	EPDM T=1mm	
3	1	NUT		
2	1	SLEEVE	INNER DIAMETER IN TABLE	
1	1	C R S SEAL	CABLE/PIPE RANGE IN TABLE	
Item	Qty	Designation	Specification	NetWeight
General tolerances used for manufacturing shown in document DDC-002180		Designed by se-henols	Created Date 2021-09-30	Latest save date 2021-10-04
		Format A2	Scale 2:1	Sheet no
		Title C R S T X Ex Assembly	Projection method First angle	
		www.roxtec.com	Restricted due to Information drawing	Rev A
		Drawing number S1571541		

A		2021-09-30	se-henols
Rev	Type of revision	Date	Sign

Information drawings show general design and nominal dimensions if not else stated