
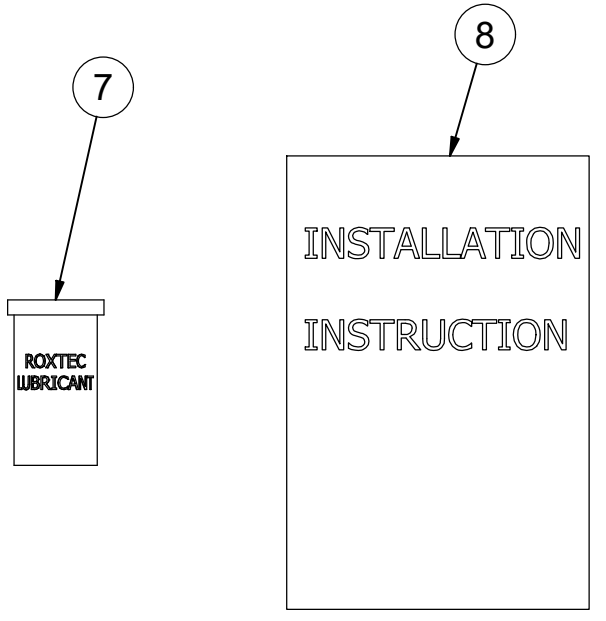
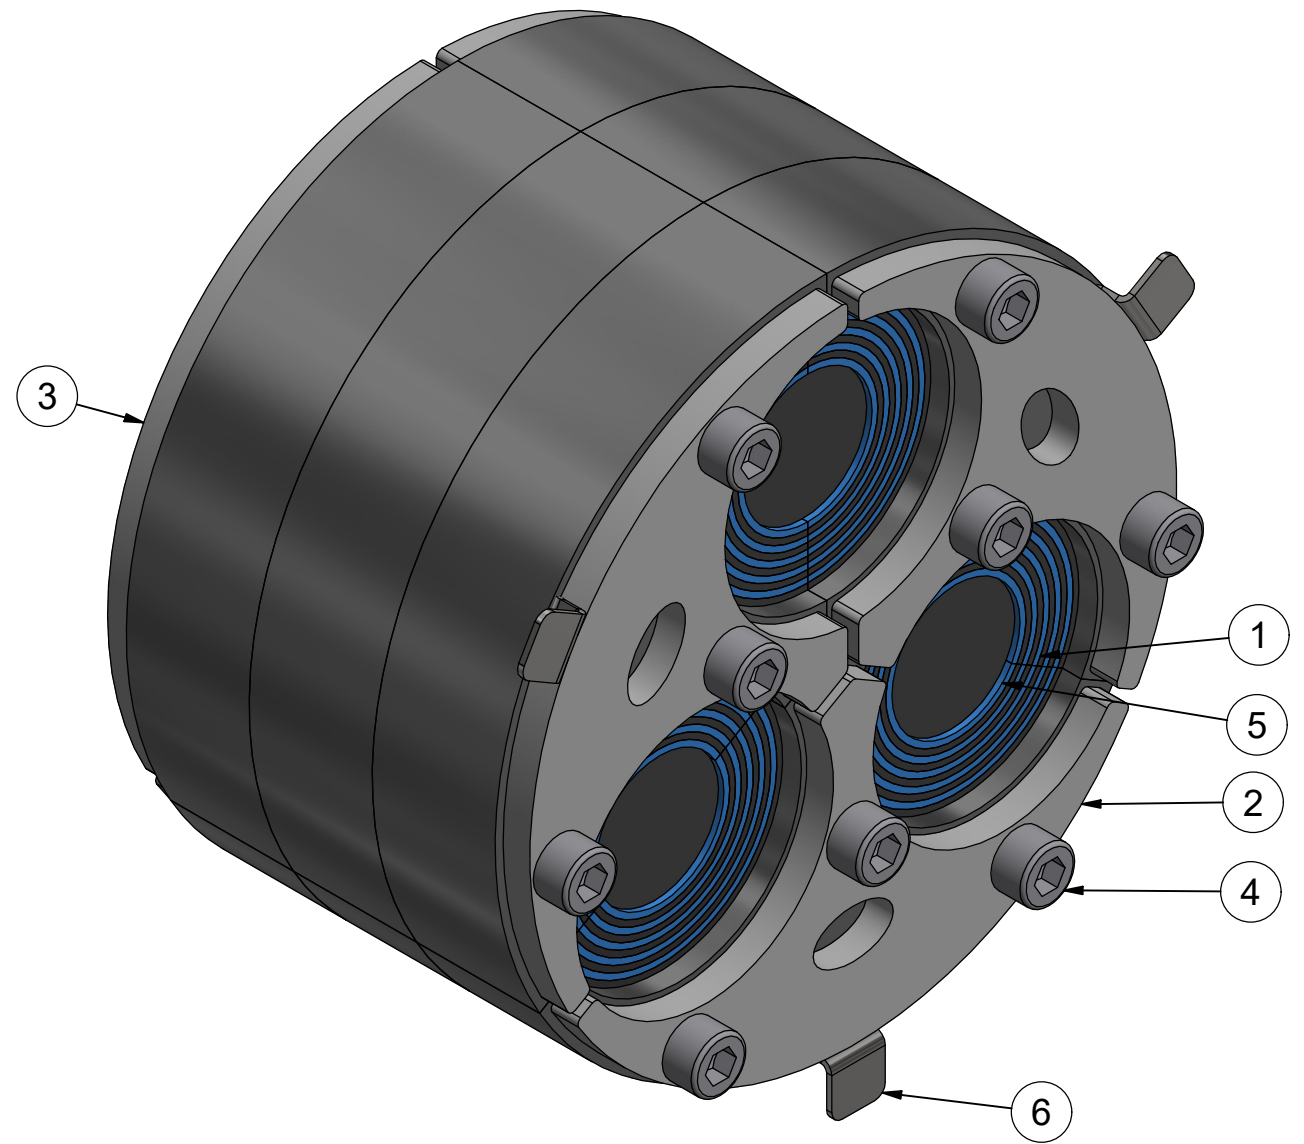
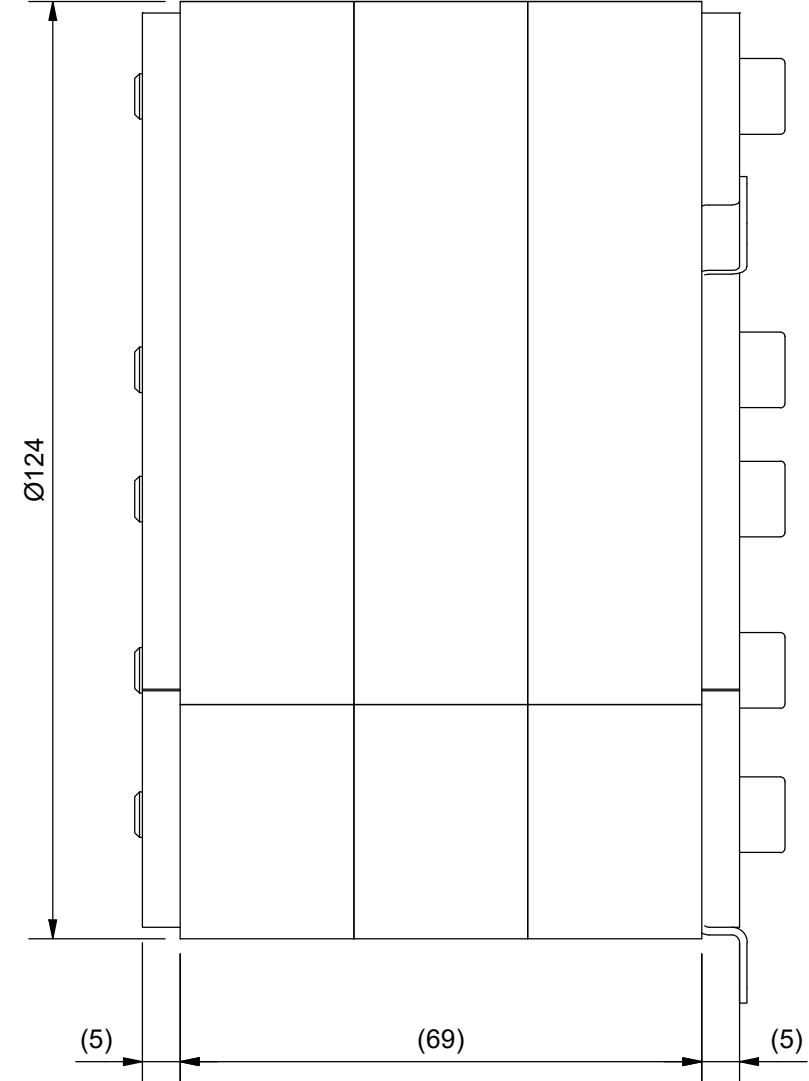


洛克赛克保留所有权利。未经授权严禁复制，
使用以及向第三方泄漏。

All rights reserved. Unauthorized reproduction, use
or disclosure to third parties is strictly forbidden.

Rev 3.1

RANGE: Ø24-44 (3x)

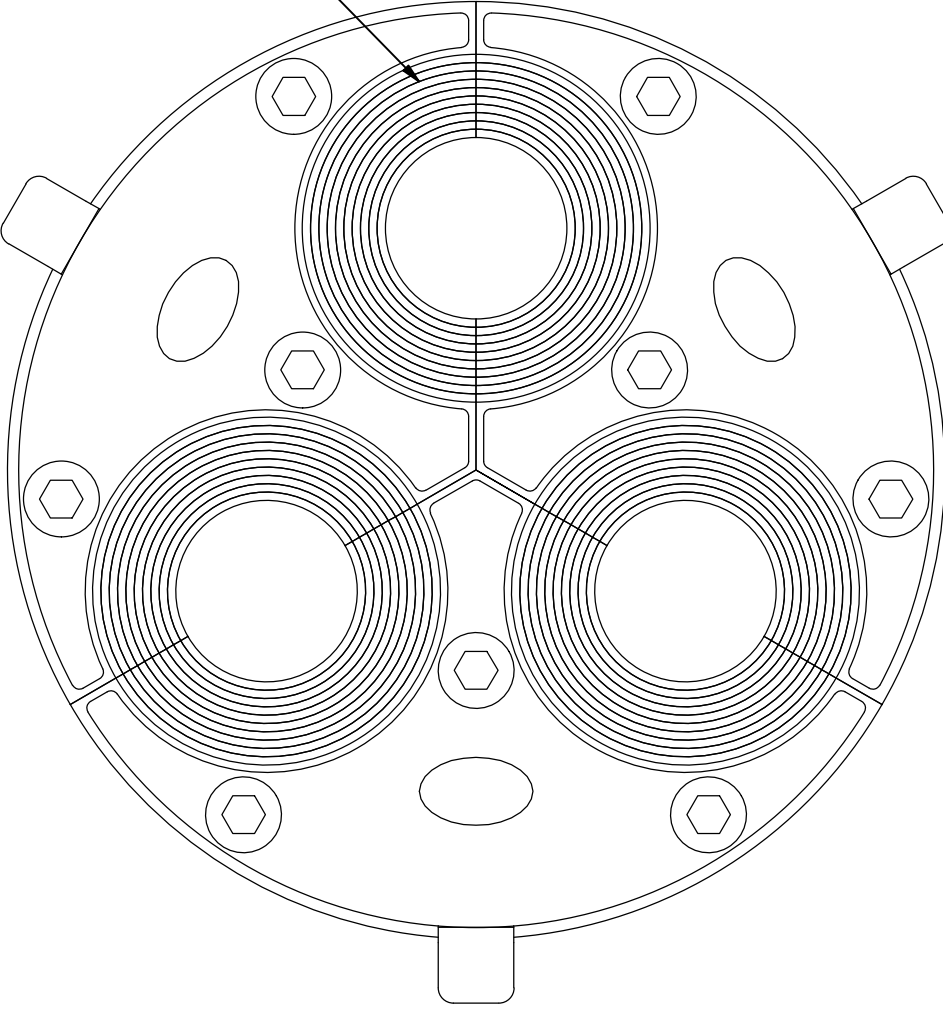

ITEM	QTY	Designation	Specification	Weight			
8	1	INSTALLATION INSTRUCTION		0			
7	1	LUBRICANT	TALLOW	0			
6	3	STOP FLANGE 20x10x5 WOH	ACID PROOF STAINLESS STEEL	0			
5	3	CORE 24	ROXYLON	0			
4	9	SCREW	MC6S M6x80 A4	0			
3	3	REAR FITTING	ACID PROOF STAINLESS STEEL	0.1			
2	3	FRONT FITTING	ACID PROOF STAINLESS STEEL	0.1			
1	3	RUBBER FRAME	ROXYLON	0.3			
General tolerances used for manufacturing shown in document DOC-002180		Designed by/date se-larlar 2021-10-27	Latest save date 2023-09-05	Format A2	Scale 1 / 1	Sheet no 1 / 1	TotWeight N/A
Title H3 UG SEALS H3 125 UG		Restricted due to Information drawing		Drawing number S1572639		Projection method ⊕	Rev E

Rev	Type of revision	Date	Sign
E	LUB. UPDATED.	2023-09-05	se-larlar

Information drawings show general design and nominal dimensions if not else stated