


洛克赛克保留所有权利。未经授权严禁复制，  
使用以及向第三方泄漏。

All rights reserved. Unauthorized reproduction, use  
or disclosure to third parties is strictly forbidden

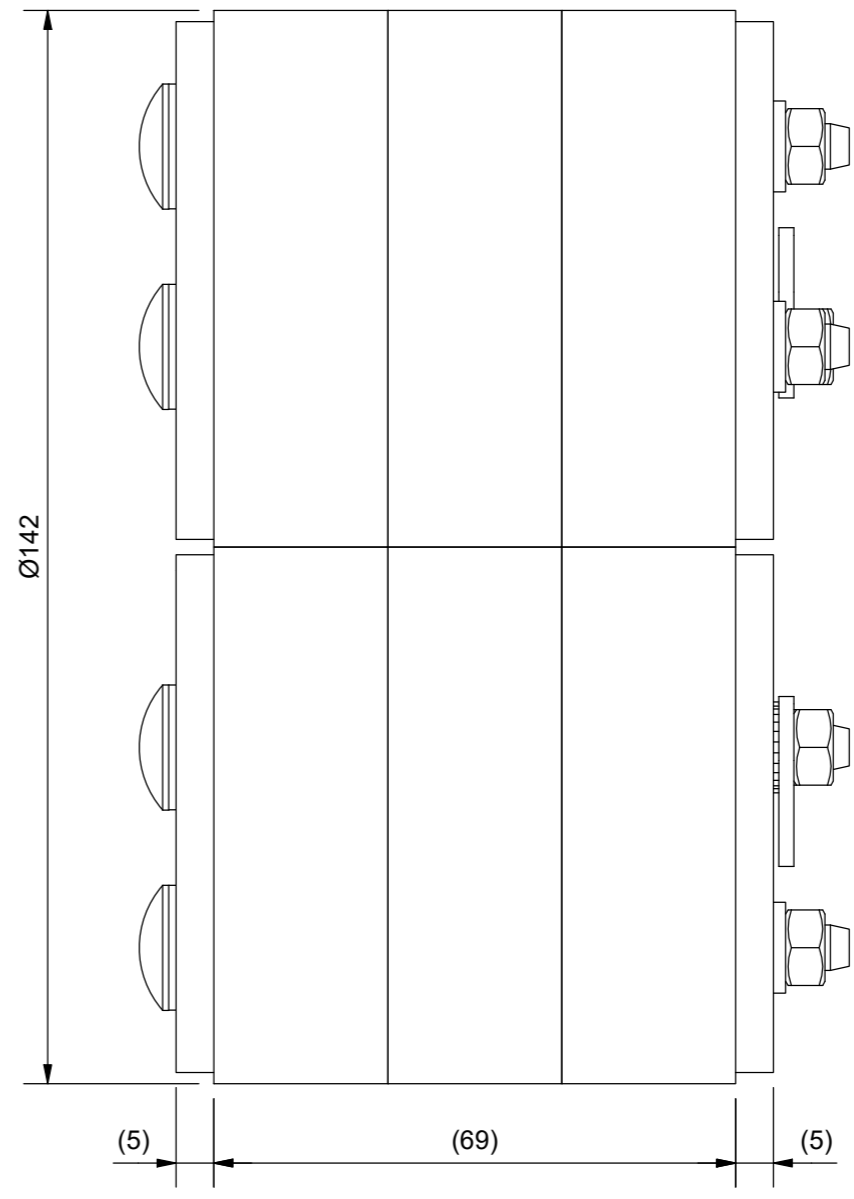

Rev	E	LUB UPDATED.	2024-01-19	se-larlal
		Type of revision	Date	Sign

ITEM	QTY	Designation	Specification	Weight
11	1	INSTALLATION INSTRUCTION		0
10	1	LUBRICANT	TALLOW	0
9	2	SERRATED LOCK WASHER	M6 AZ A4 6,4 DIN 6798A	0
8	2	STOP FLANGE	ACID PRROF STAINLESS STEEL	0
7	4	WASHER	BRB M6 A4	0
6	6	NUT	M6M M6 A4	0
5	6	SCREW	MVBF M6x90 A4 PT	0
4	6	GASKET MVBF	2ORI100085150, M6 EPDM T=1	0
3	1	CORE Ø39	ROXYLON	0.1
2	4	FITTING	ACID PRROF STAINLESS STEEL	0.2
1	2	RUBBER	ROXYLON	0.6

General tolerances used for manufacturing shown in document DOC-002180		Designed by/date se-larlal 2021-10-29	Latest save date 2024-01-19	Format A2	Scale	Sheet no 1 / 1	TotWeight 2.4 kg
<b>Roxtec</b> www.roxtec.com		Title RS UG SEALS RS 142 39-68 UG Restricted due to Information drawing		Drawing number S1572787		Projection method Rev E	

Information drawings show general design and nominal dimensions if not else stated