
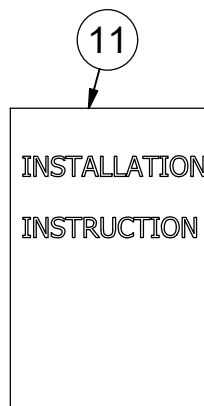

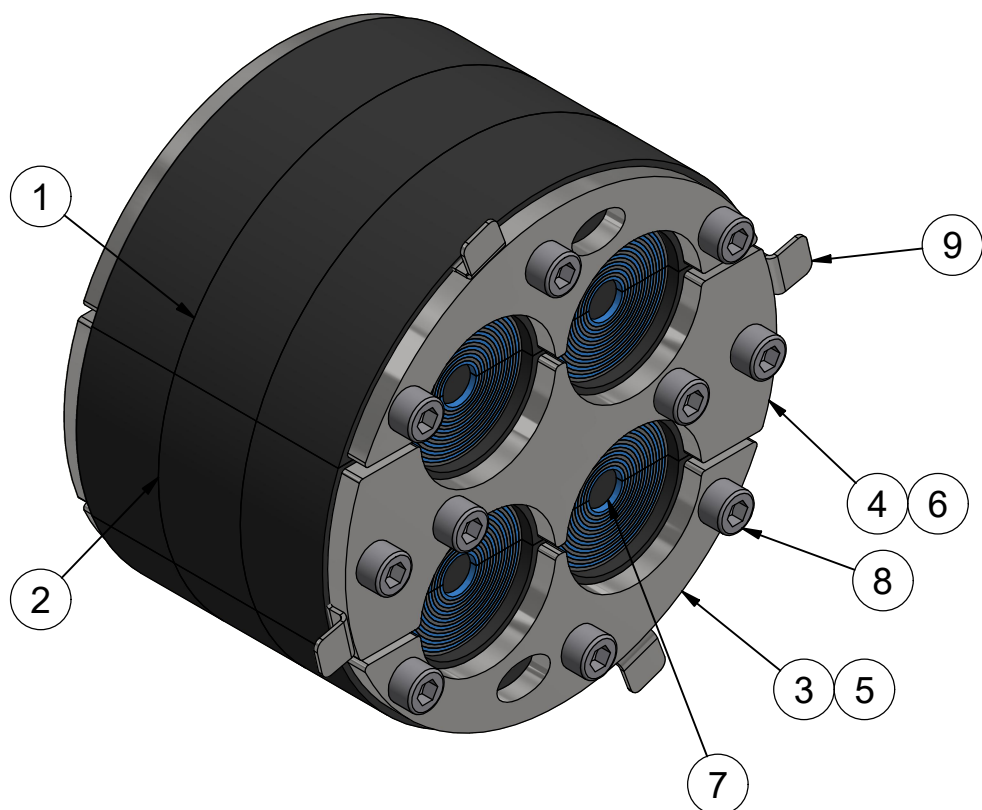
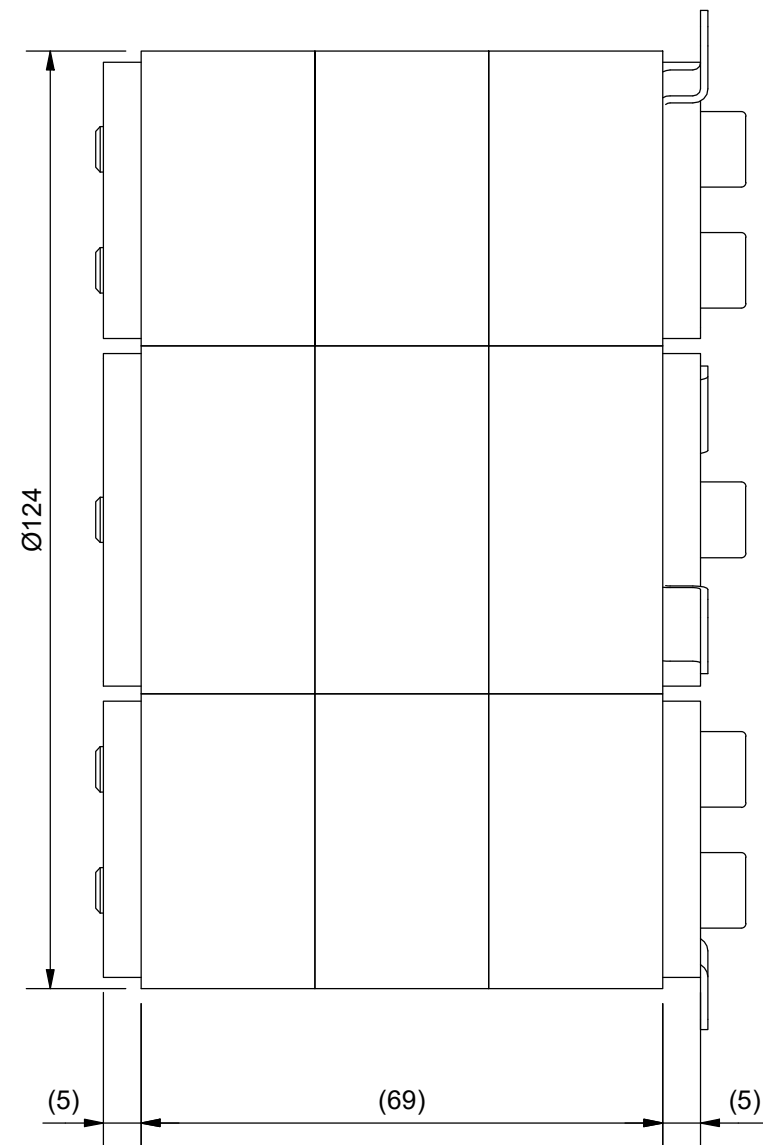


RANGE: Ø0+9-33 (4x)

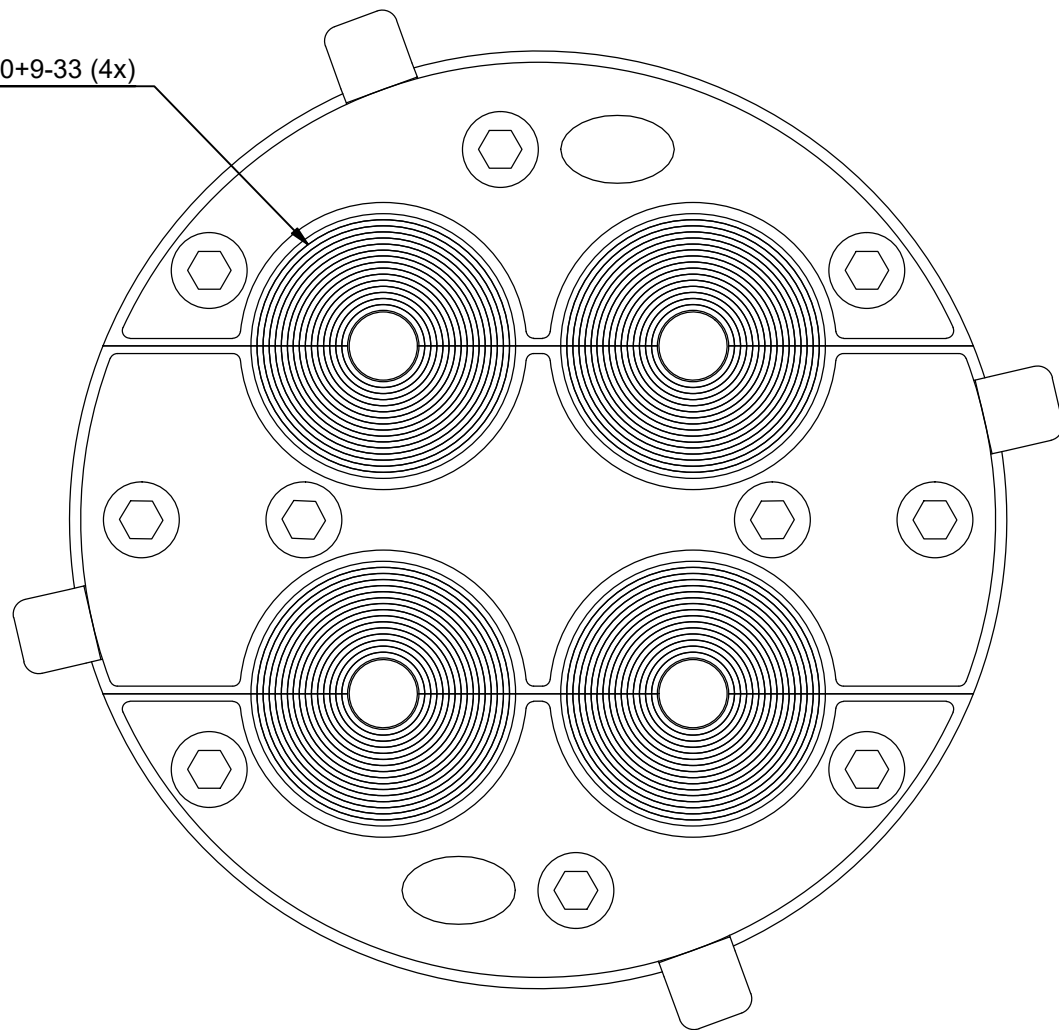

12	1	INSTALLATION INSTRUCTION		
11	1	LUBRICANT	TALLOW	
9	4	STOP FLANGE 20x10x5 WOH AISI316	205556	0
8	10	SCREW	MC6S M6x80 A4	0
7	4	CORE Ø9	ROXYLON	0
6	1	REAR FITTING 2	ACID PROOF STAINLESS STEEL	0.1
5	2	REAR FITTING 1	ACID PROOF STAINLESS STEEL	0.1
4	1	FRONT FITTING 2	ACID PROOF STAINLESS STEEL	0.1
3	2	FRONT FITTING 1	ACID PROOF STAINLESS STEEL	0.1
2	1	RUBBER FRAME 2	ROXYLON	0.5
1	2	RUBBER FRAME 1	ROXYLON	0.3

ITEM	QTY	Designation	Specification				Weight
General tolerances used for manufacturing shown in document DOC-002180		Designed by/date se-larlar 2022-02-10	Latest save date 2022-08-29	Format A3	Scale	Sheet no 1 / 1	TotWeight 1,8 kg
Title H4 UG SEALS H4 125 UG		Restricted due to Information drawing				Drawing number S1576271	Projection method C

C	TITLE UPDATED	2022-08-29	se-linado
Rev	Type of revision	Date	Sign