
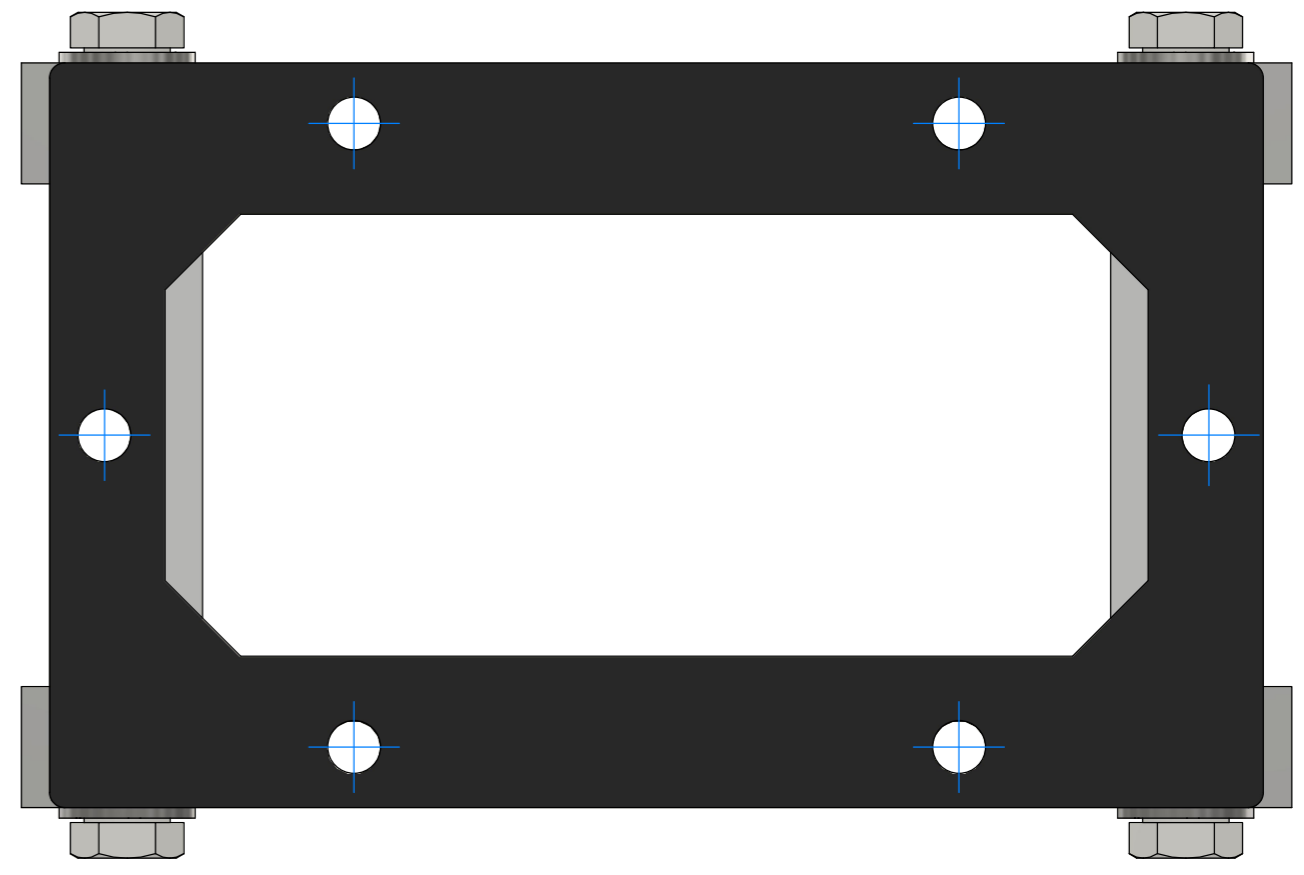
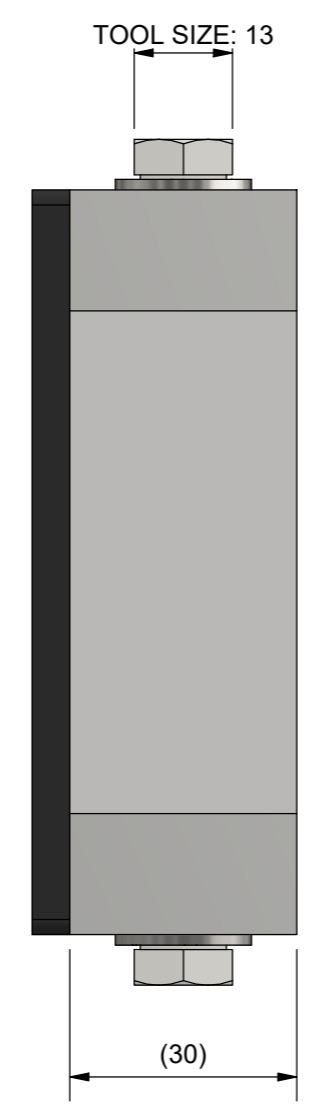


洛克赛克保留所有权利。未经授权严禁复制，使用以及向第三方泄漏。




保密
Confidential

All rights reserved. Unauthorized reproduction, use or disclosure to third parties is strictly forbidden.

Rev 3.2

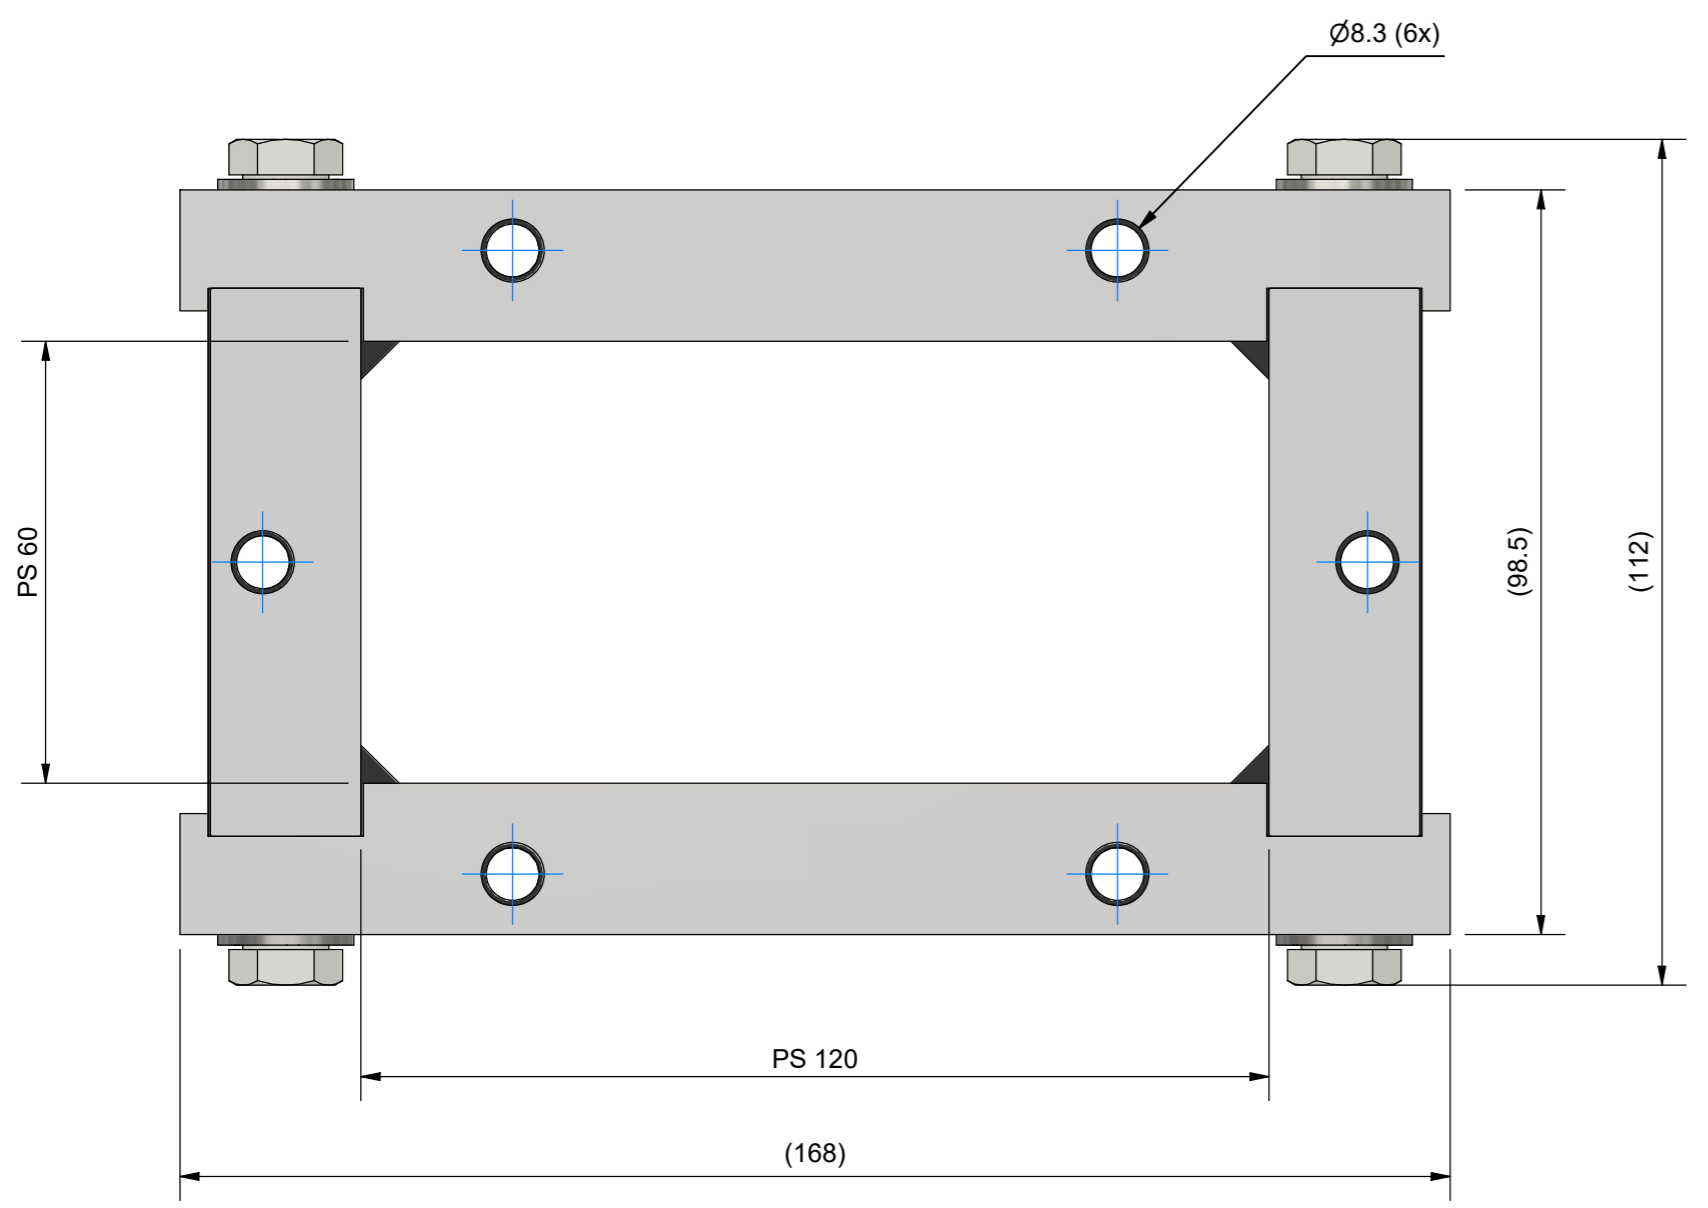

APERTURE DIMENSIONS

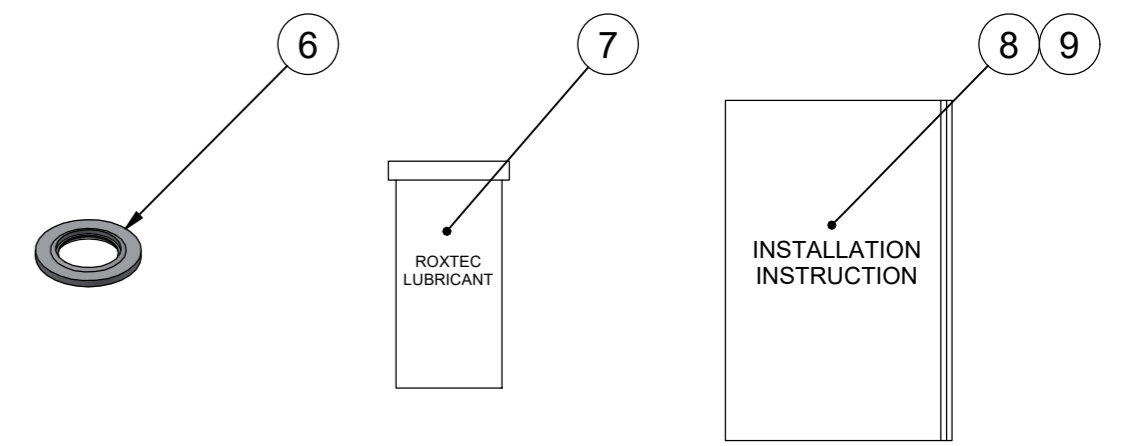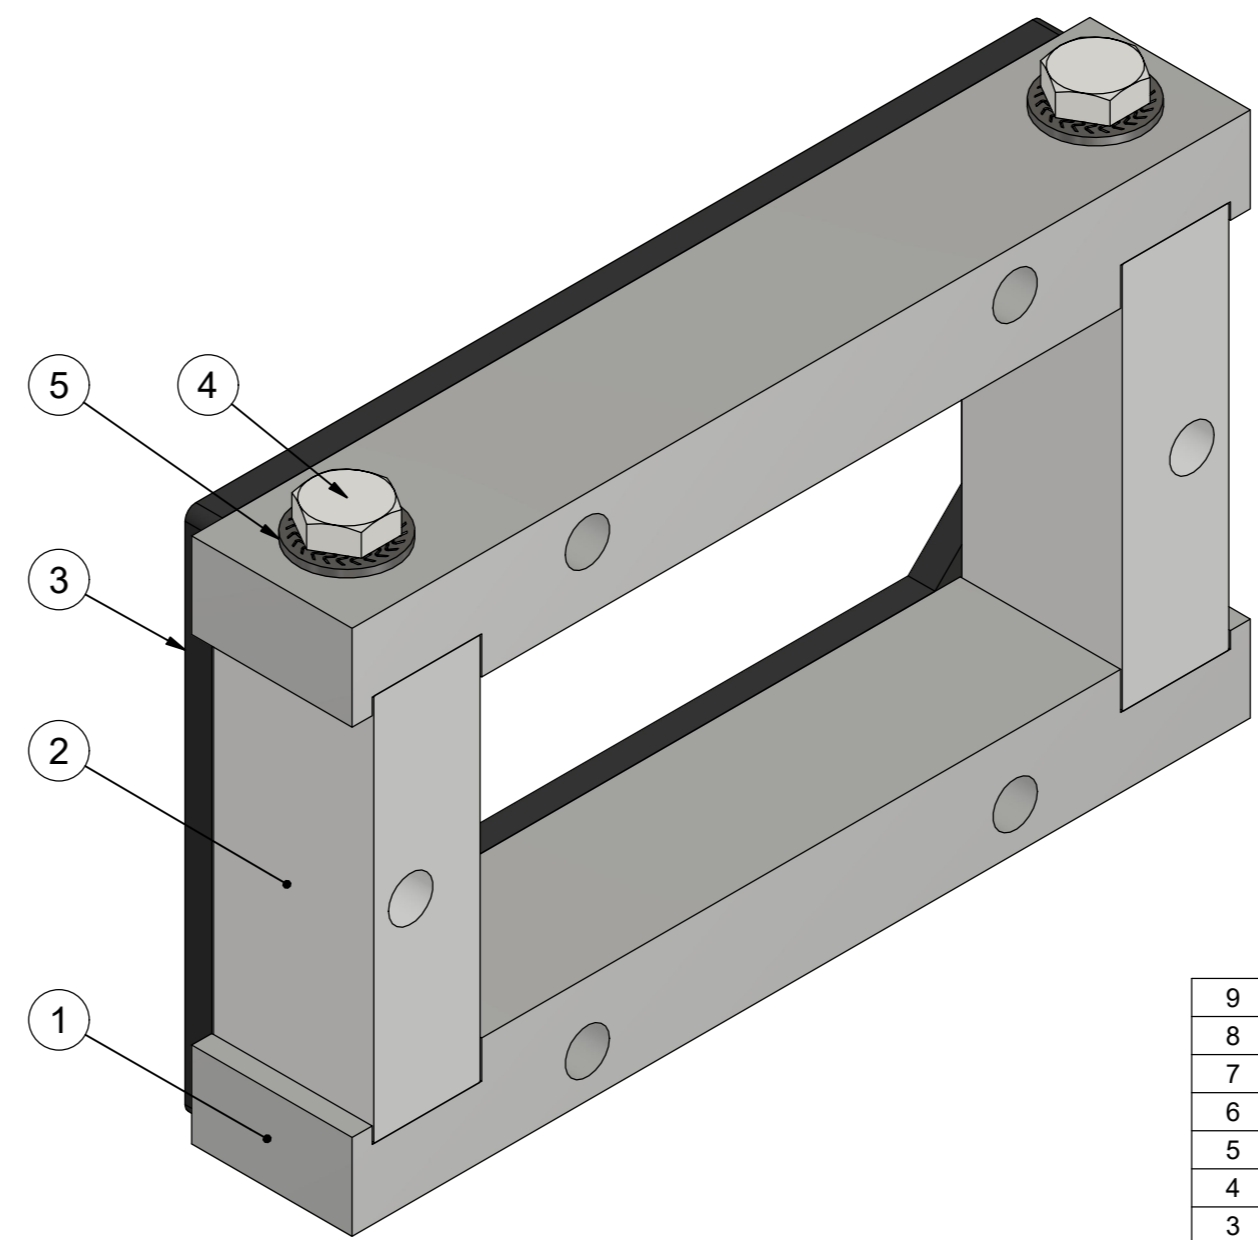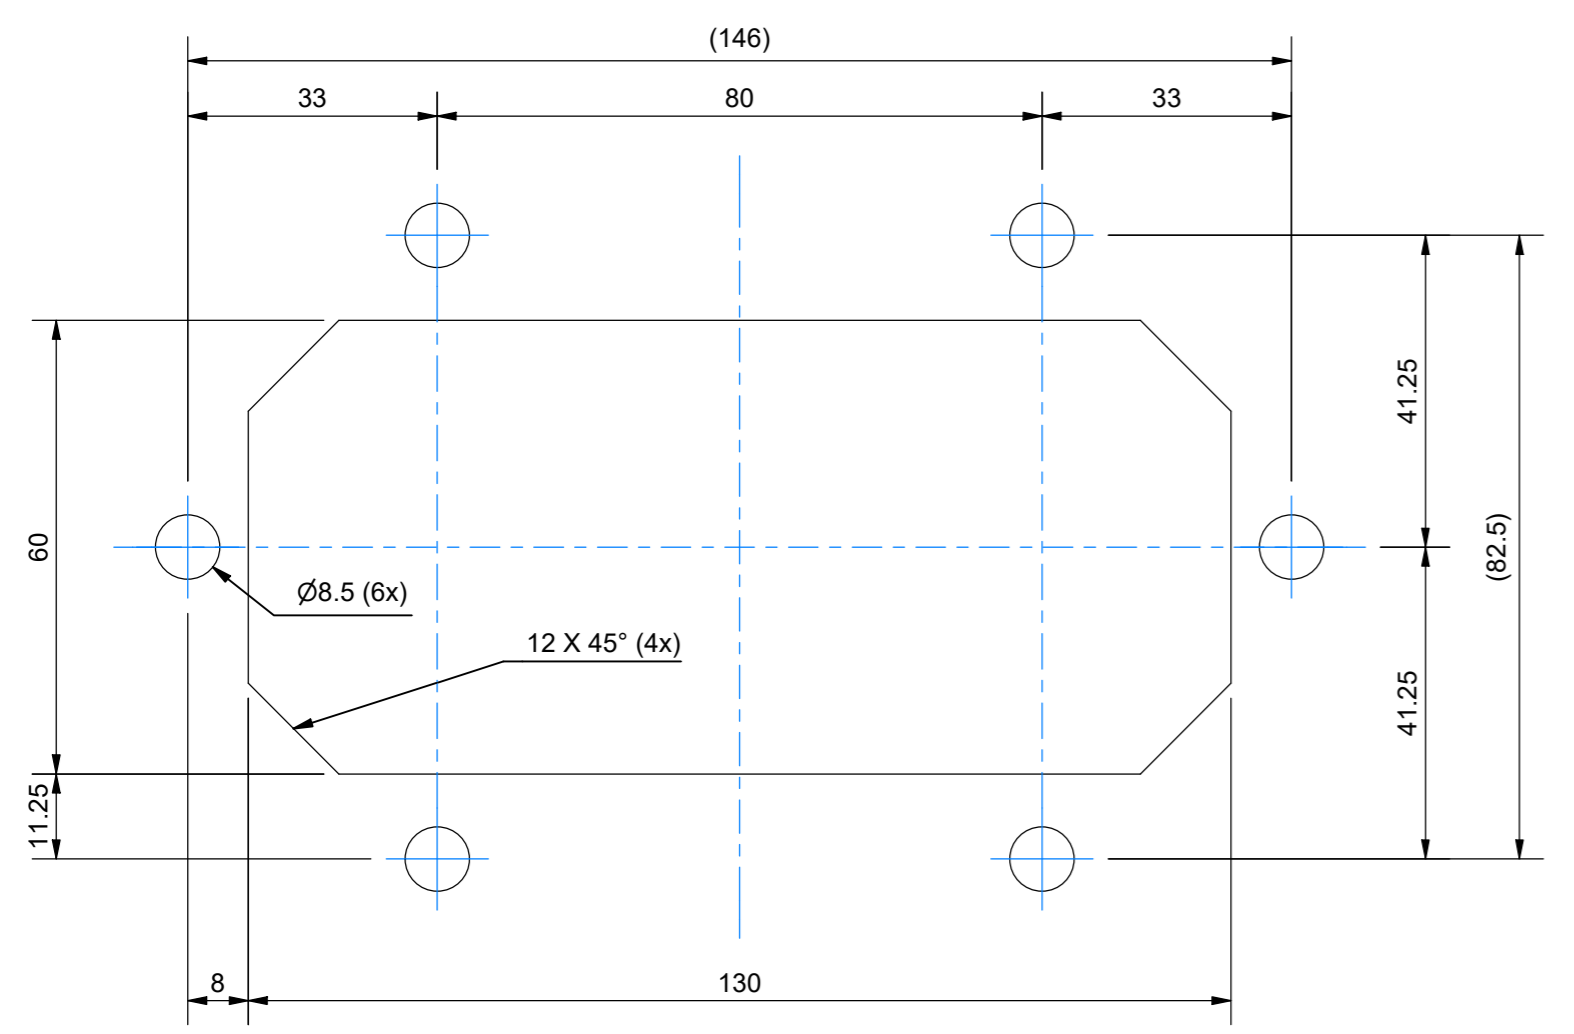

ITEM	QTY	Designation	Specification	Weight
9	1	INSTALLATION INSTRUCTION CM		
8	1	INSTALLATION INSTRUCTION CRF		
7	1	LUBRICANT BLUE		
6	6	SEALING WASHER	M8 A4	
5	4	SERRATED WASHER	NSK-M A4 M8	0
4	4	SCREW	M6S M8x35 ISO 4017 A4-70	0
3	1	GASKET 60x120	EPDM CELLULAR RUBBER	0
2	2	SHORT SIDE 60	ANODIZED ALUMINUM	0.1
1	2	LONG SIDE 160	ANODIZED ALUMINUM	0.2
ITEM QTY		Designation	Specification	Weight
General tolerances used for manufacturing shown in document DOC-002180		Designed by/date se-robgus 2022-04-01	Latest save date 2026-01-26	Format A2
		Scale 1 : 1	Sheet no 1 / 1	TotWeight 0.8 kg
Title CRF 60x120 ASSEMBLY		Restricted due to Information drawing		Projection method E
Drawing number S1578377		Rev E		

Rev	Type of revision	Date	Sign
E		2026-01-26	se-marfre