
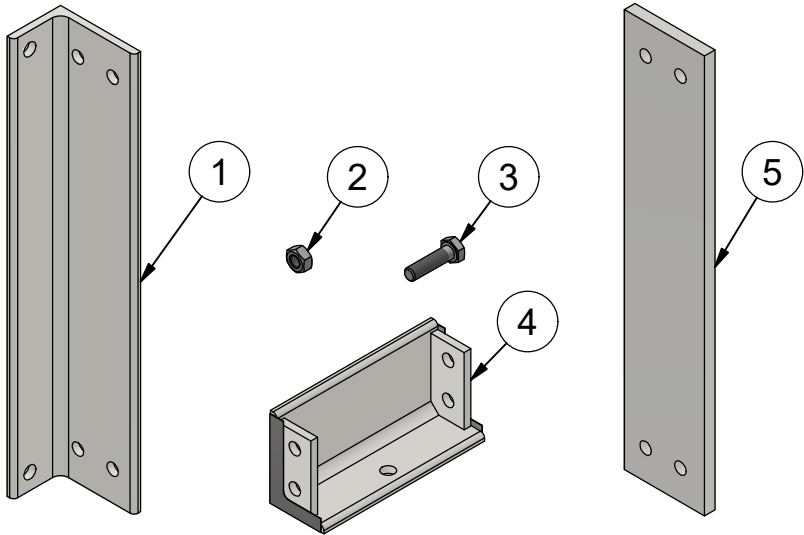
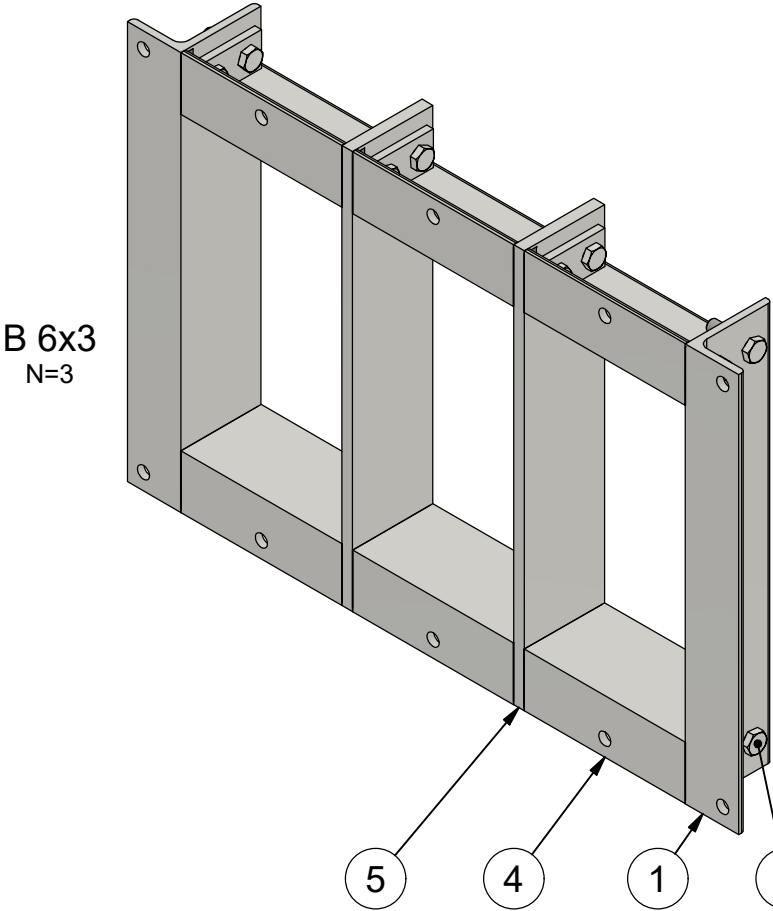
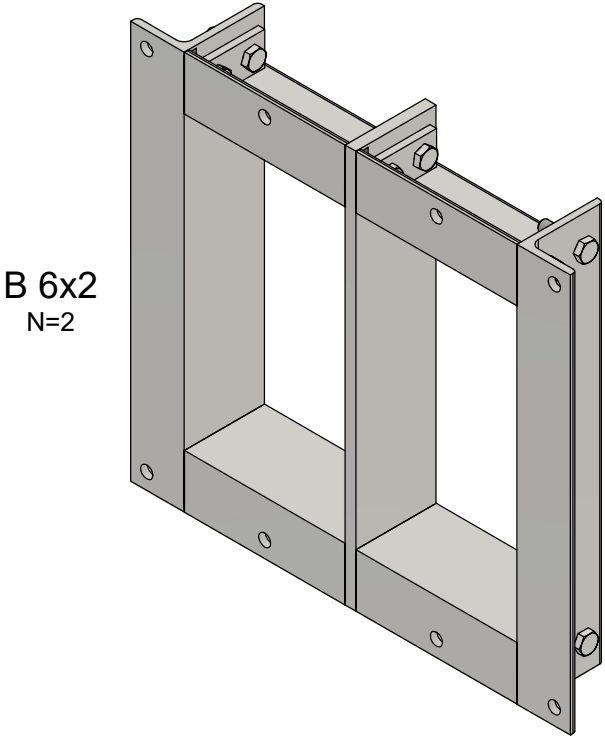
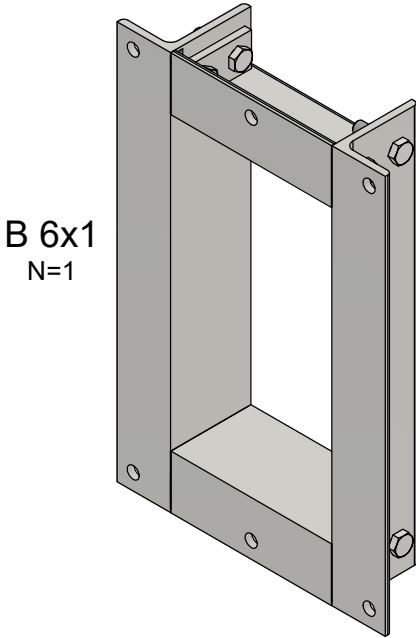


TYPE	H1 [mm]	H2 [mm]	Y [mm]
B 2xN	101	181	157
B 4xN	159.5	239.5	215.5
B 6xN	218	298	274
B 8xN	278	358	334

N [QTY]	W [mm]	B [QTY]
x1	200.5	0
x2	329	1
x3	457.5	2
x4	586	3
x5	714.5	4
x6	843	5
x7	971.5	6
x8	1100	7
x9	1228.5	8
x10	1357	9

N: NUMBER OF FRAME OPENINGS
H: NUMBER OF HOLES = 4+2N

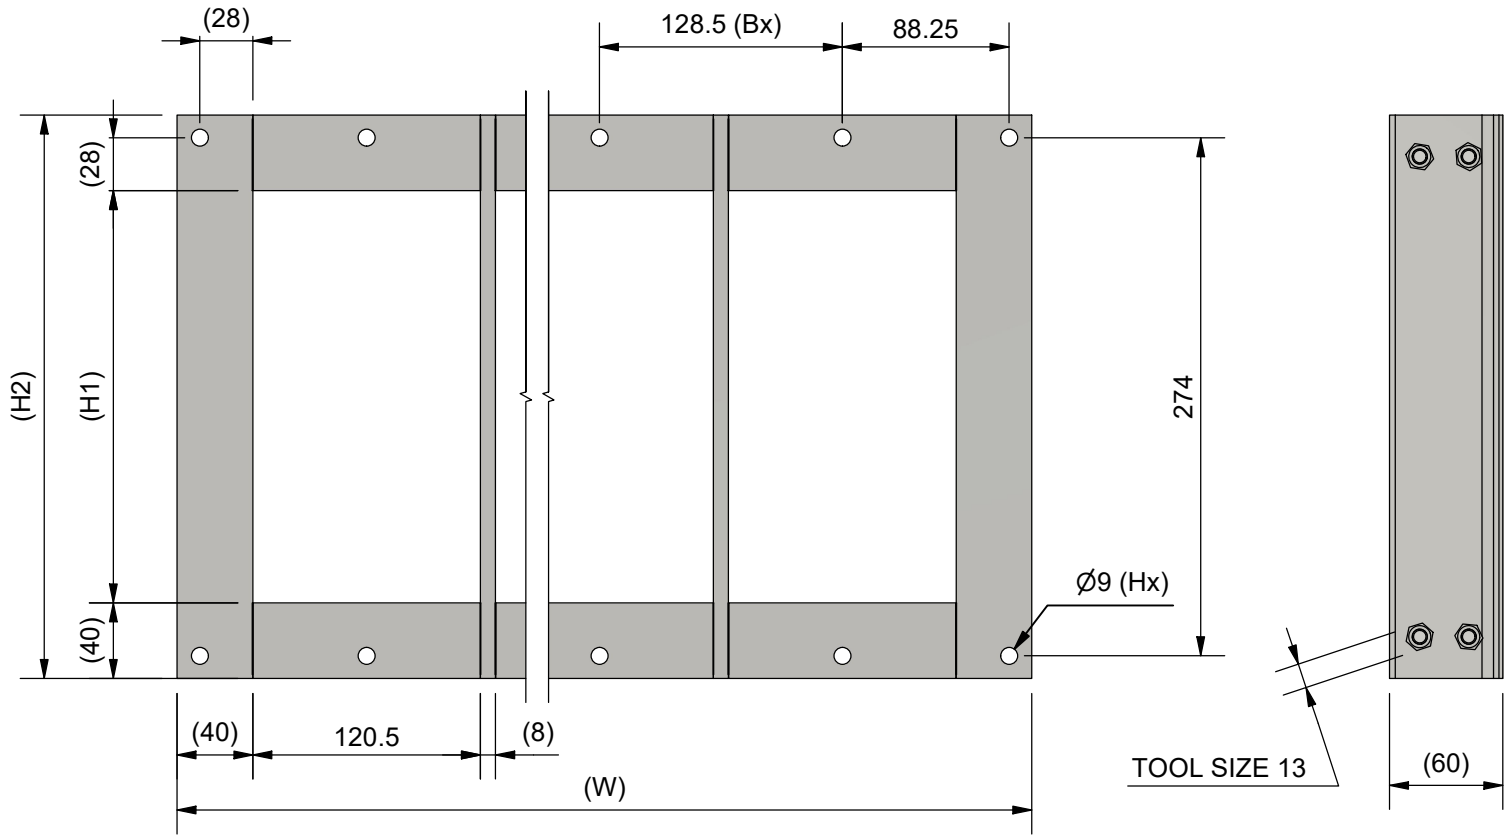

NOTE: FASTENERS INCLUDED WITH SHORT SIDE

ITEM	QTY	Designation	Specification
5	N-1	PARTITION WALL	
4	2N	SHORT SIDE	
3	4+4N	SCREW	M8x30 ISO 4017
2	4+4N	NUT	M8 ISO 4032
1	2	LONG SIDE	

General tolerances used for manufacturing shown in document DOC-002180		Designed by/date se-parham 2023-04-17		Latest save date 2026-09-08	Format A3	Scale 1:4	Sheet no 1 / 1	TotWeight N/A
 roxtec.com		Title B FRAME SINGLE AND COMBINATION FRAME						Projection method 
		Restricted due to Information drawing			Drawing number S1590987			Rev B