烙克赛克保留所有权利。未经授权严禁复制，
使用以及向第三方泄漏。
保密
Confidential
All rights reserved. Unauthorized reproduction, use
or disclosure to third parties is strictly forbidden

TYPE	ROWS [QTY]	H1 [mm]	H2 [mm]	Y [mm]	A [QTY]
G 2+2x1 Ex	2	101	344	98	3
G 4+4x1 Ex	2	159.5	461	82.2	5
G 6+6x1 Ex	2	218	578	88	6
G 8+8x1 Ex	2	278	698	92.6	7
G 2+2+2x1 Ex	3	101	455	101.3	4
G 4+4+4x1 Ex	3	159.5	630	96.8	6
G 6+6+6x1 Ex	3	218	806	94.5	8
G 8+8+8x1 Ex	3	278	986	93.6	10

TOTAL NUMBER OF HOLES = (2*A)+4

MATERIAL ACID PROOF STAINLESS STEEL
MATERIAL MILD STEEL HOT DIPPED GALVANIZED ACC, TO ISO 1461
MATERIAL MILD STEEL PRIMED (TRANSPORT PROTECTION)

G 8+8x1 Ex

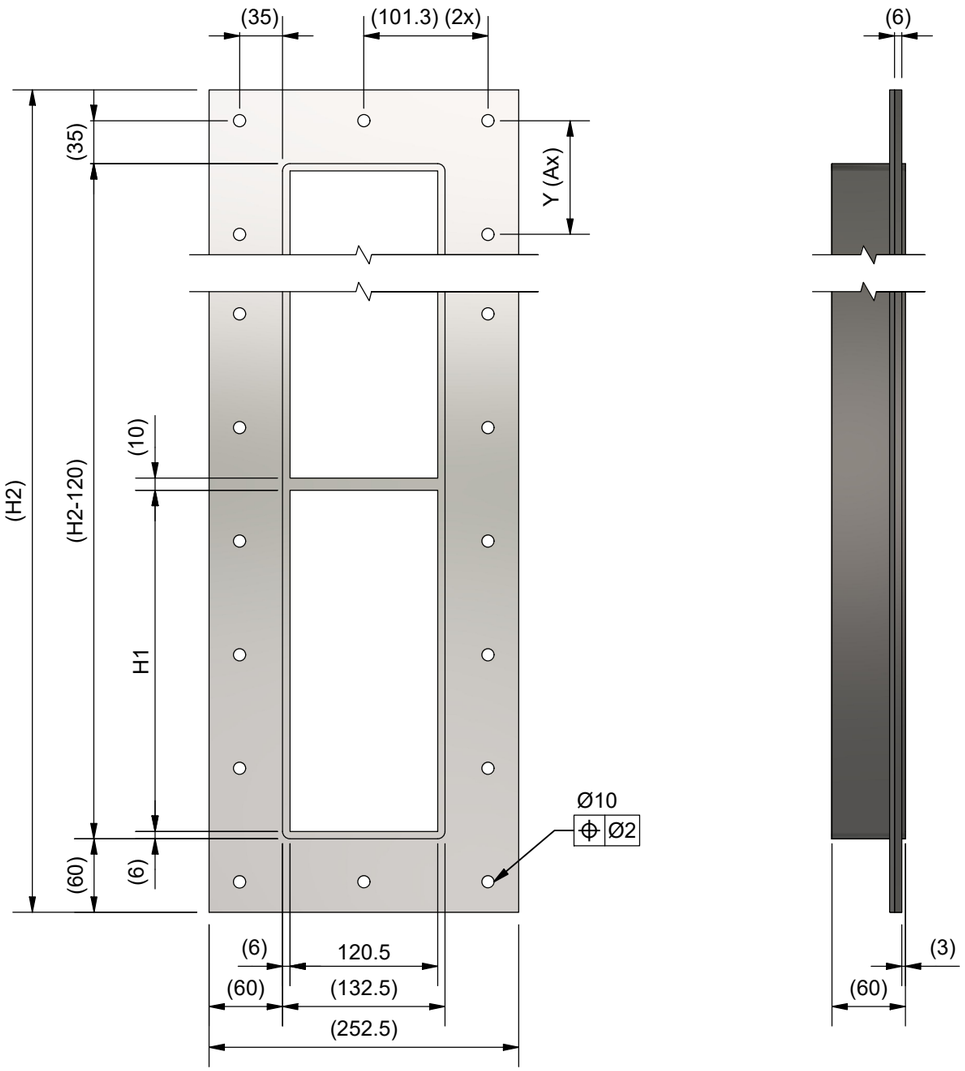

ITEM	QTY	Designation	Specification	Weight
2	1	GASKET		
1	1	FRAME		

General tolerances used for manufacturing shown in document DOC-002180

Designed by/date: se-marfre 2024-08-15

Latest save date: 2026-01-22

Format: A3

Scale: 1 : 5

Sheet no: 1 / 1

TotWeight: N/A

Roxtec

roxtec.com

Title: G Ex FRAME +SINGLE FRAME

Projection method

Restricted due to: Information drawing

Drawing number: S1608043

Rev: C

Rev	Type of revision	Date	Sign
C	FRAME NAMES CORRECTED	2026-01-22	se-marfre

Rev 3.2

Information drawings show general design and nominal dimensions if not else stated