



烙克赛克保留所有权利。未经授权严禁复制，使用以及向第三方泄露。

All rights reserved. Unauthorized reproduction, use or disclosure to third parties is strictly forbidden.

Rev 3.1

TYPE	ROWS [QTY]	H1 [mm]	H2 [mm]	Y [mm]	HOLES [QTY]
G 2+2x1	2	101	344	98	10
G 4+4x1	2	159.5	461	82.2	14
G 6+6x1	2	218	578	88	16
G 8+8x1	2	278	698	92.6	18
G 2+2+2x1	3	101	455	101.3	12
G 4+4+4x1	3	159.5	630	96.8	16
G 6+6+6x1	3	218	806	94.5	20
G 8+8+8x1	3	278	986	93.6	24

MATERIAL ACID PROOF STAINLESS STEEL
MATERIAL MILD STEEL HOT DIPPED GALVANIZED ACC, TO ISO 1461
MATERIAL MILD STEEL PRIMED (TRANSPORT PROTECTION)

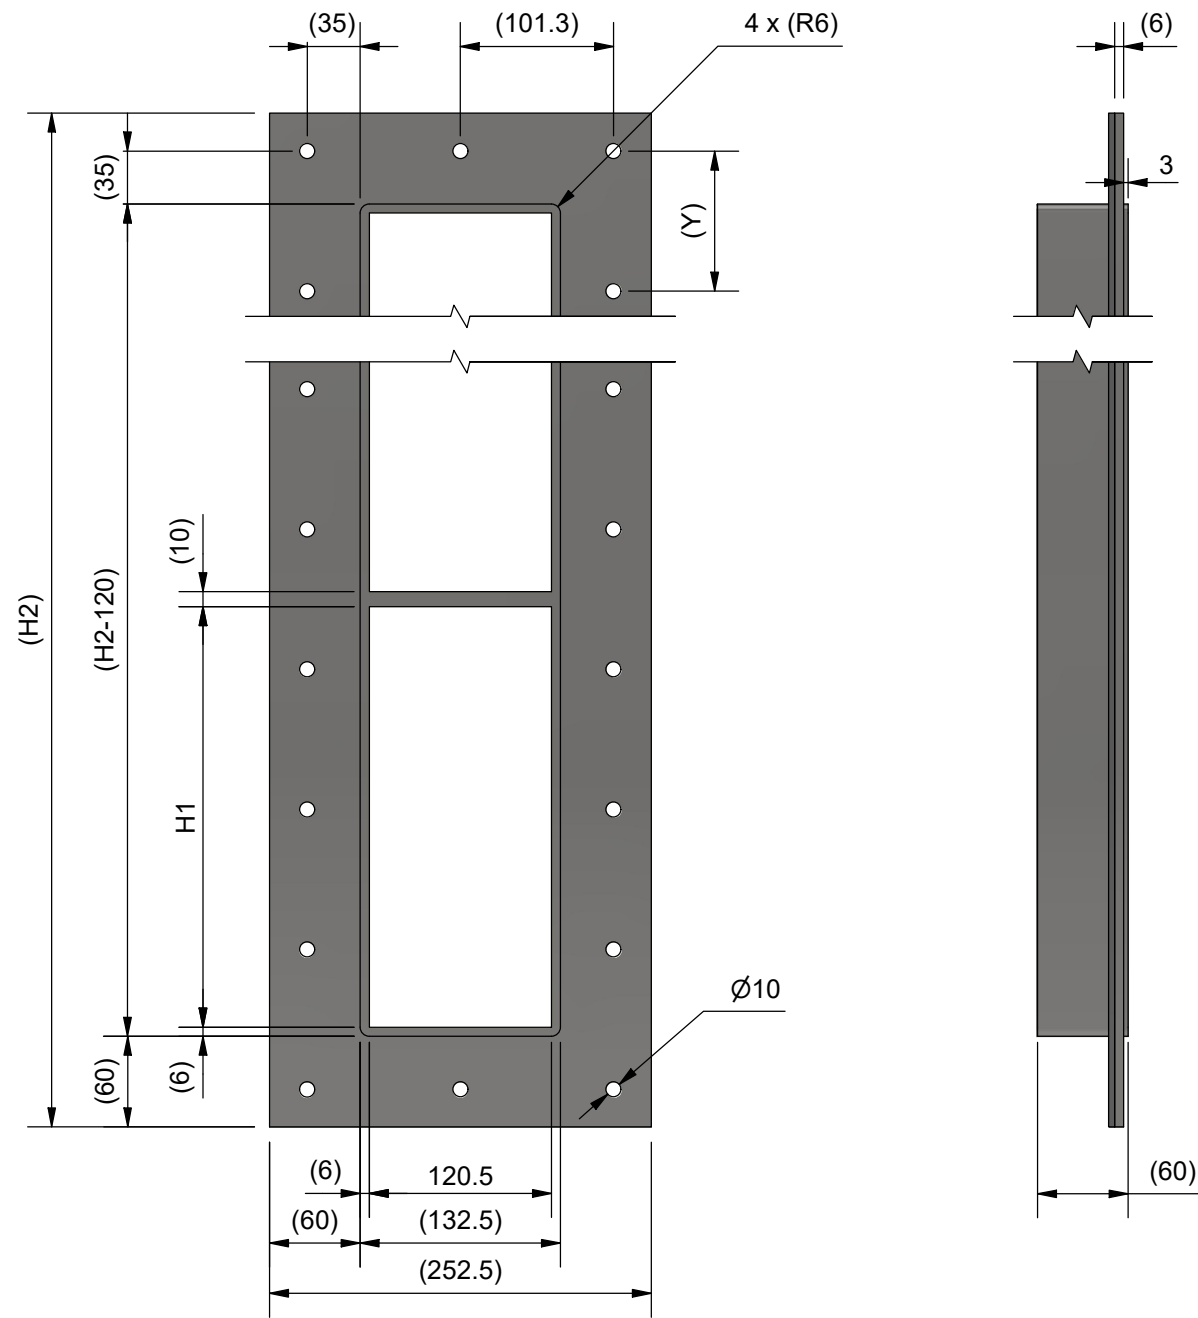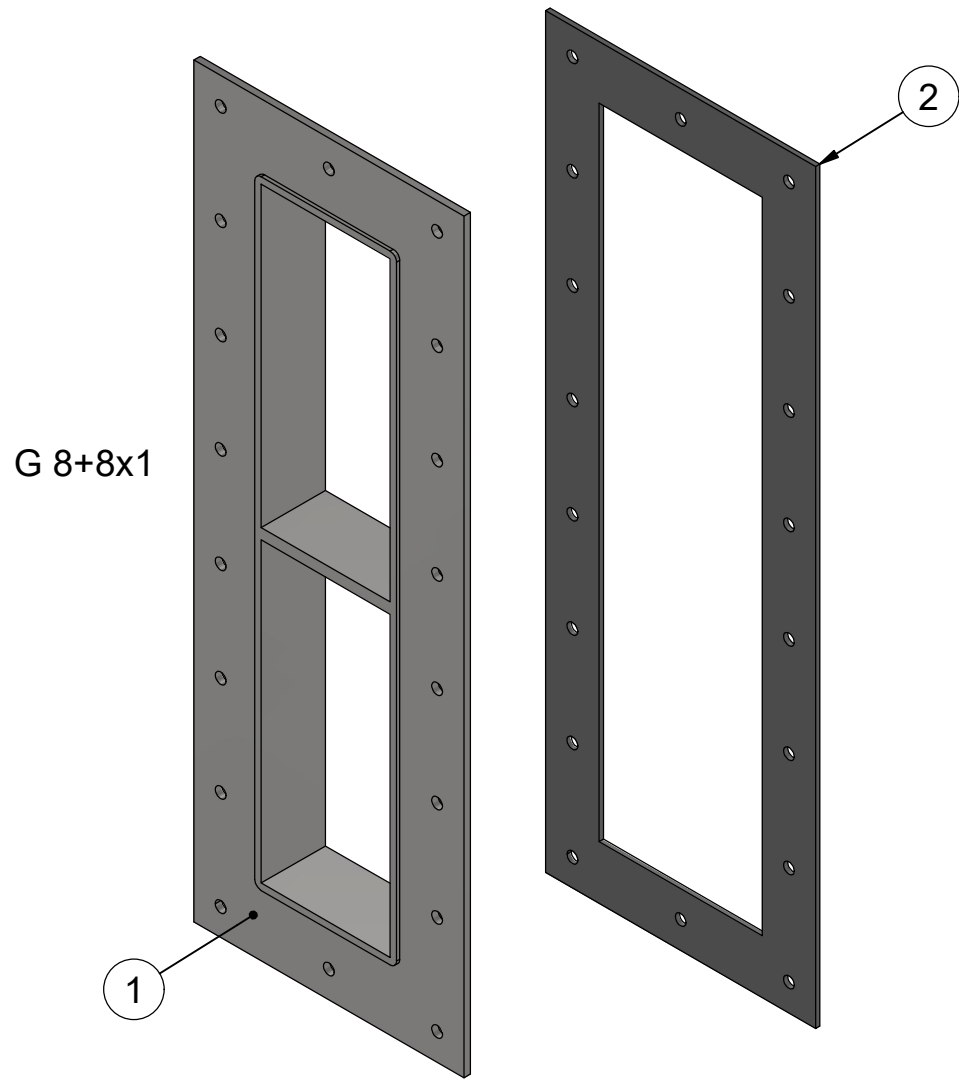

2	1	GASKET							
1	1	FRAME							
ITEM	QTY	Designation	Specification				Weight		
General tolerances used for manufacturing shown in document DOC-002180			Designed by/date se-marfre 2024-08-15	Latest save date 2024-08-21	Format A3	Scale	Sheet no 1 / 1	TotWeight	
 www.roxtec.com			Title G...B EX FRAME +SINGLE FRAME				Projection method 		
Restricted due to			Information drawing		Drawing number	S1608043		Rev A	

A		2024-08-15	se-marfre
Rev	Type of revision	Date	Sign

Information drawings show general design and nominal dimensions if not else stated