
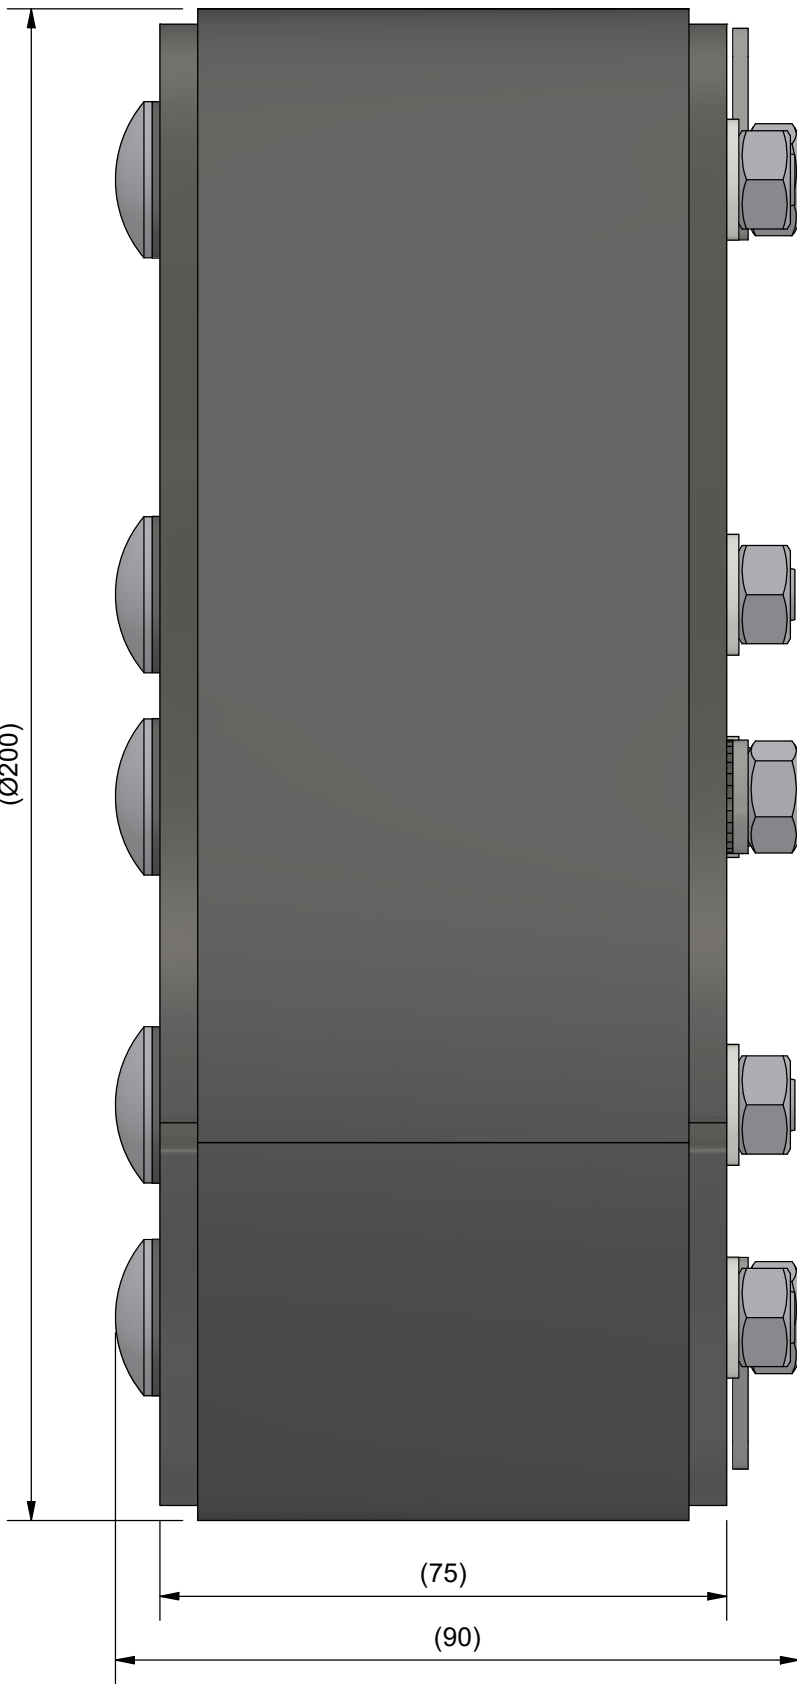


A		2025-11-14	se-larlar
Rev	Type of revision	Date	Sign

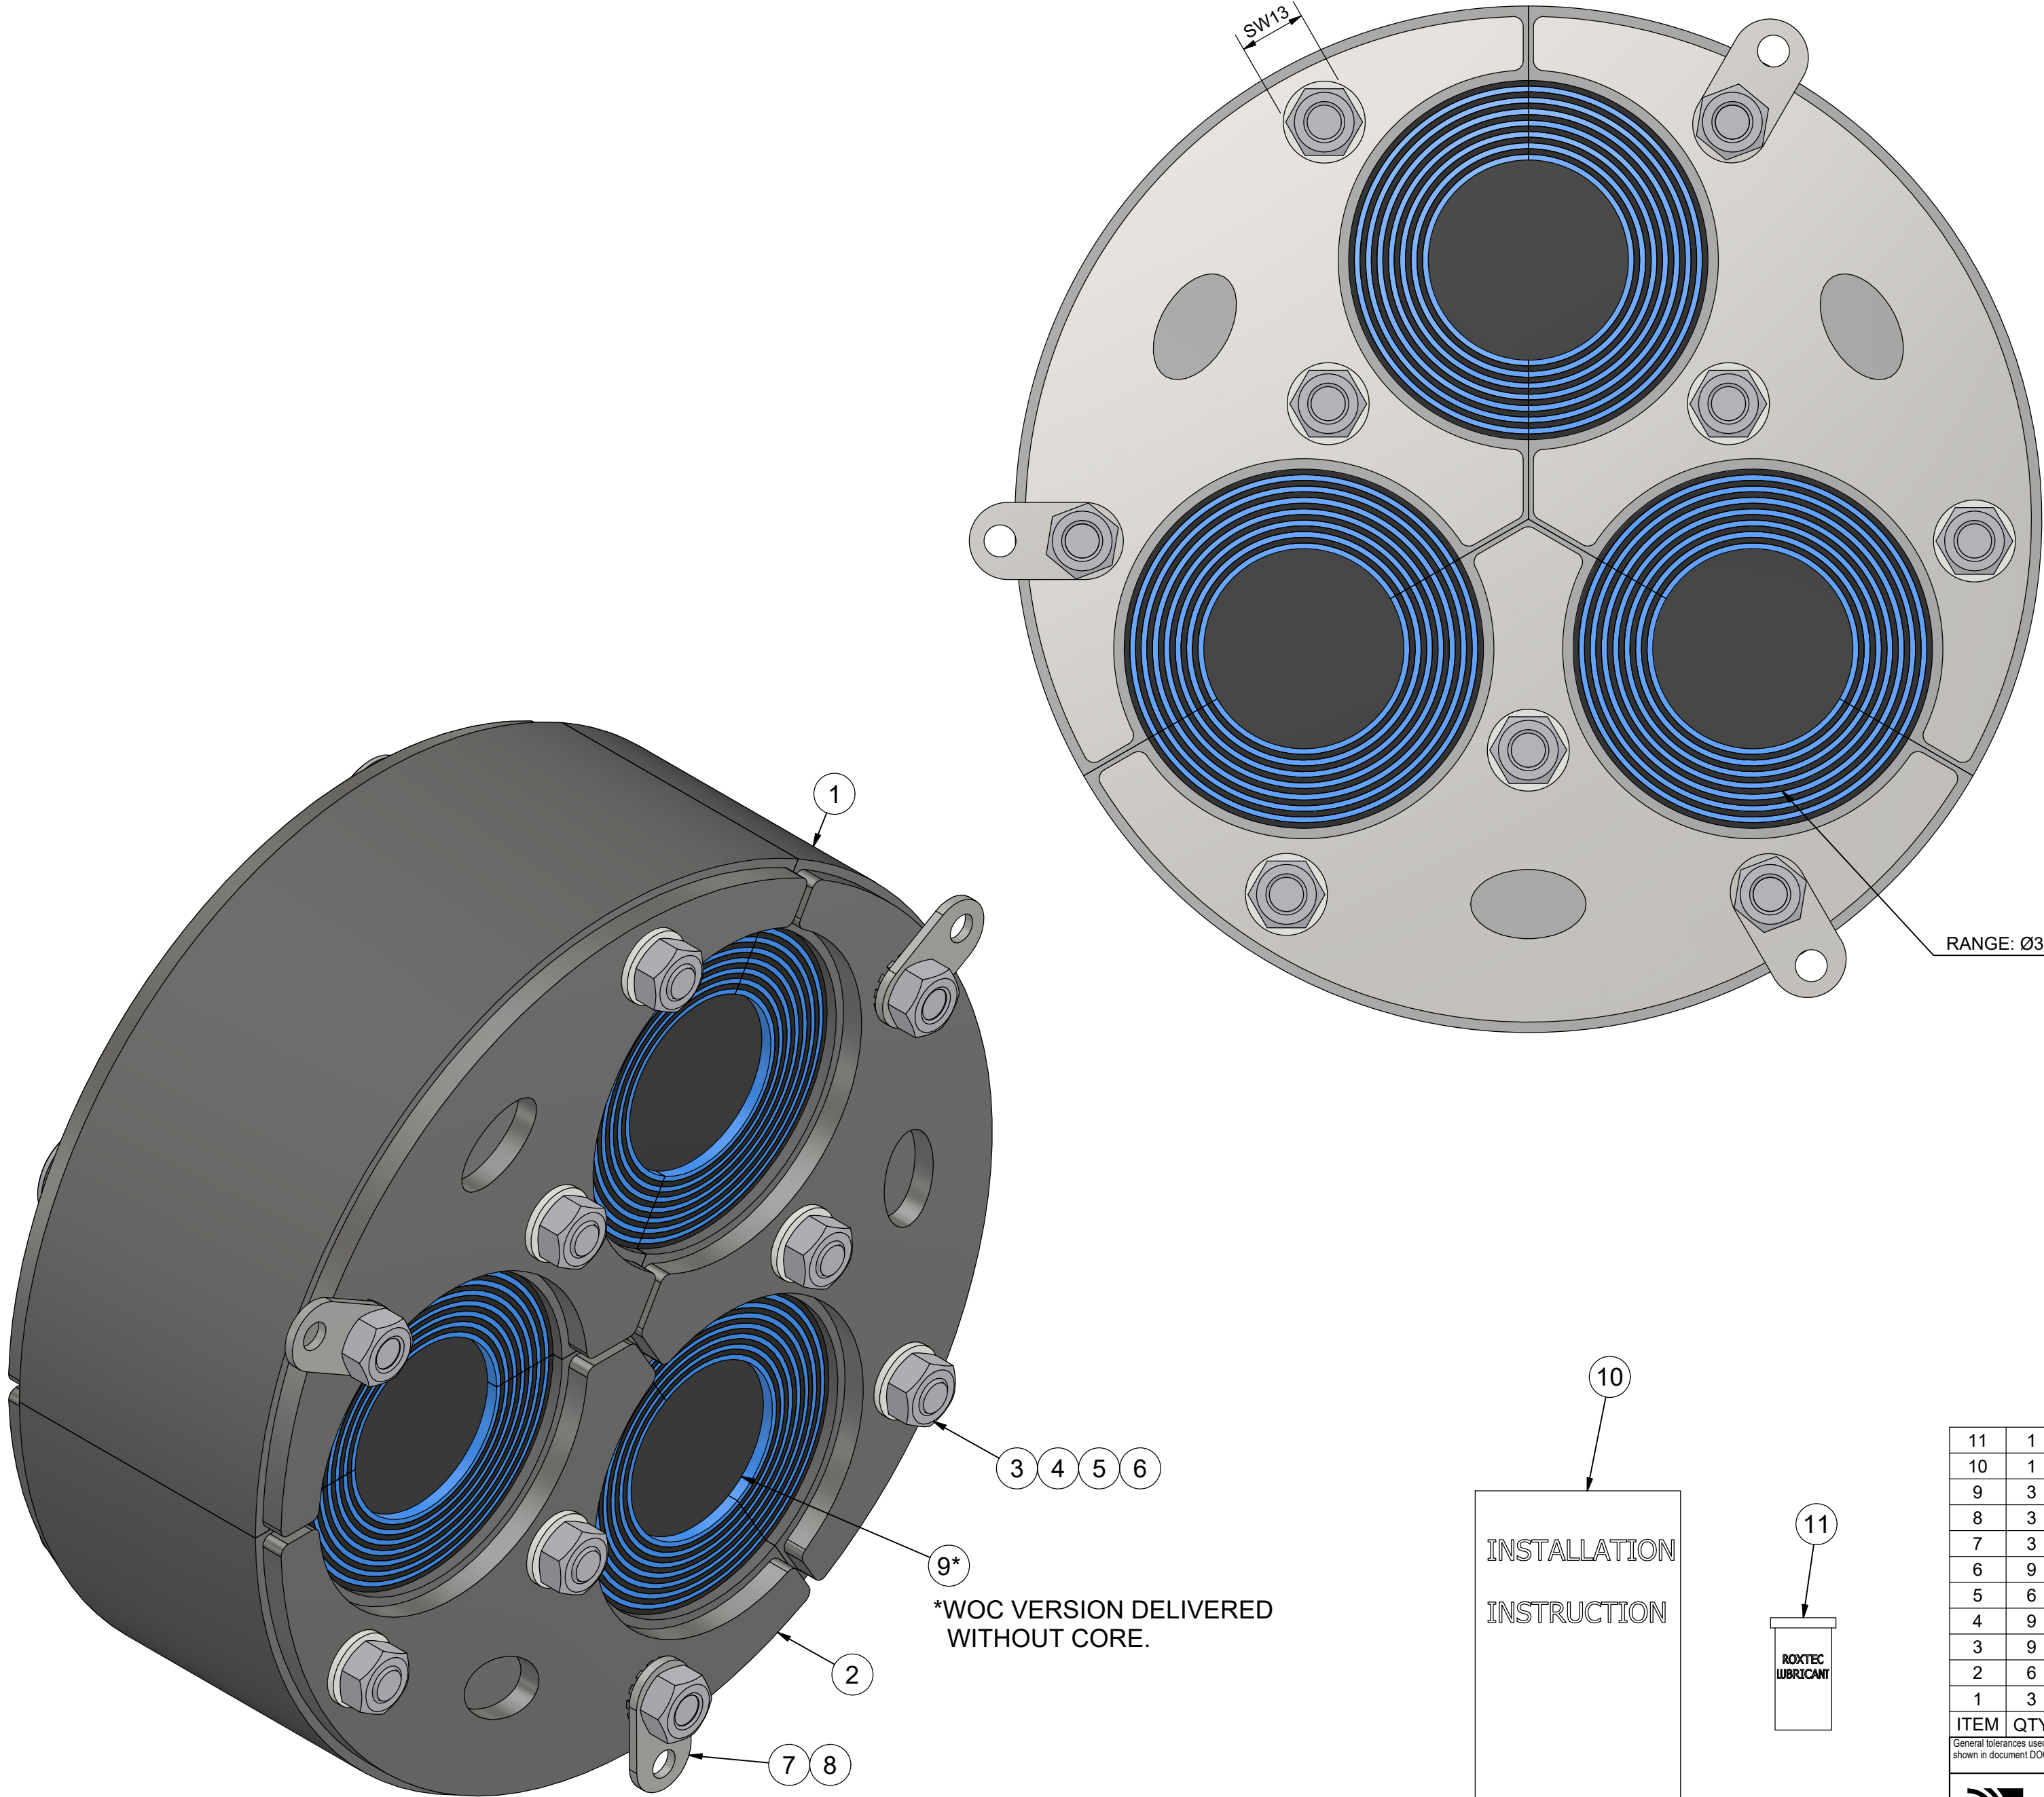

11	1	LUBRICANT							
10	1	INSTALLATION INSTRUCTION							
9	3	CORE 39 L=60	ROXYLON						0.1
8	3	SERRATED LOCK WASHER	DIN 6798A A4						0
7	3	STOP FLANGE M6/M8 FLAT	ACID PROOF STAINLESS STEEL						0
6	9	SCREW	DIN 603 A4						0
5	6	WASHER	ISO 7089 A4						0
4	9	NUT	ISO 4032 A4						0
3	9	GASKET MVBF	EPDM T=1						0
2	6	FITTING	ACID PROOF STAINLESS STEEL						0.2
1	3	RUBBER FRAME	ROXYLON						0.8
ITEM	QTY	Designation	Specification				Weight		
General tolerances used for manufacturing shown in document DOC-002180		Designed by/date se-larlar 2025-11-14	Latest save date 2025-11-14	Format A2	Scale 1 : 1	Sheet no 1 / 1	TotWeight 4.4 kg		
		Title H UG H3 200 UG					Projection method 1st angle		
		Restricted due to Information drawing	Drawing number S1624370				Rev A		