



Roxtec HD transits

High cable density transit devices with frame in 316L.

The Roxtec HD transits are cable entry devices for harsh and hazardous environments that allow up to 32 cables per opening. They are available in three different sizes. The cable transit has a 316L stainless steel frame and sealing modules which are adaptable to a variety of cable sizes.



- Rodent resistant
- Corrosion resistant
- Light-weight
- Area efficient
- Allows pre-terminated cables

Product characteristics



IP/UL NEMA

Structure of installation



Cabinets & enclosures

Mounting type



Bolting

Ratings & certificates

Tightness

- IP 66/67, UL/NEMA 4,4X,12,13

Frame dimensions


in/lbs

The frame variants below are a limited selection. For the full range of frames and configurations, please visit [roxtec.com](https://www.roxtec.com).


Product	Frame openings	Packing space	External dimensions WxHxD	Aperture dimensions w x h	Weight	Art. no
HD 16 FRAME ASSEMBLY AISI 316	1	1.575 x 6.299	3.299 x 9.291 x 2.362	2.52(+0.039/-0.02) x 8.504(+0.039/-0.02)	3.5	193084
HD 32 FRAME ASSEMBLY AISI316	2	1.575 x 6.299	5.118 x 9.291 x 2.362	4.331(+0.039/-0.02) x 8.504(+0.039/-0.02)	5	109238

Sealing components

Sealing components



HD module with Multidiameter™



HD solid compensation module




Lubricant

For detailed information, please visit [roxtec.com](https://www.roxtec.com).



Pre-configured transit kits

in/lbs

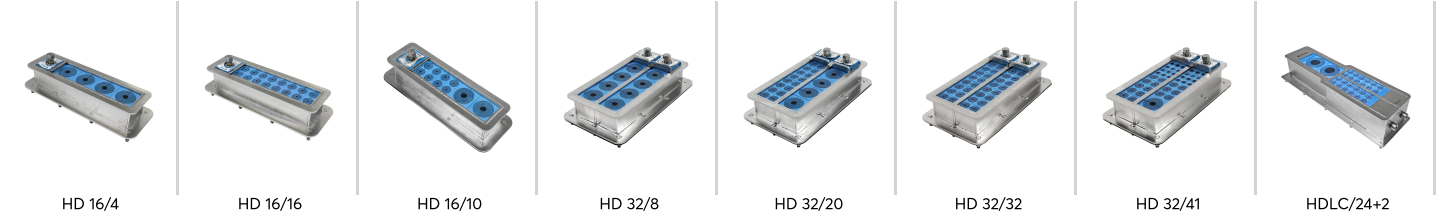

Product	Configuration	External dimensions WxHxD	Aperture dimensions w x h	Weight	Art. no
HD 16/4	4x (0.374-1.240)	3.299 x 9.291 x 2.362	2.52(+0.039/-0.02) x 8.504(+0.039/-0.02)	4.3	193101
HD 16/16	16x (0.138-0.610)	3.299 x 9.291 x 2.362	2.52(+0.039/-0.02) x 8.504(+0.039/-0.02)	4.3	193100
HD 16/10	2x (0.374-1.240), 8x (0.138-0.610)	3.299 x 9.291 x 2.362	2.52(+0.039/-0.02) x 8.504(+0.039/-0.02)	4.3	198297
HD 32/8	8x (0.374-1.240)	5.118 x 9.291 x 2.362	4.331(+0.039/-0.02) x 8.504(+0.039/-0.02)	7.3	112276
HD 32/20	16x (0.138-0.610), 4x (0.374-1.240)	5.118 x 9.291 x 2.362	4.331(+0.039/-0.02) x 8.504(+0.039/-0.02)	7.3	112278
HD 32/32	32x (0.138-0.610)	5.118 x 9.291 x 2.362	4.331(+0.039/-0.02) x 8.504(+0.039/-0.02)	7.4	112279
HD 32/41	1x (0.374-1.240), 16x (0.138-0.610), 24x (0.118-0.374)	5.118 x 9.291 x 2.362	4.331(+0.039/-0.02) x 8.504(+0.039/-0.02)	7.3	112280
HDLC/24+2	2x (0.945-2.126), 24x (0.138-0.650)	14.882 x 4.724 x 3.701	14.409(+0.039/-0.039) x 4.252(+0.039/-0.039)	13.7	173277

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2024-05-03