# Roxtec HD 穿隔系统

带 316L 框架的高电缆密度穿隔系统。

Roxtec HD 电缆穿隔系统可用于恶劣和危险的环境チ每个开孔可容纳多达 32 根电缆。提供三种不同的尺寸。 该电缆穿隔系统配有 316L 不锈钢框架チ以及可灵活适配各种电缆规格的密封模块。

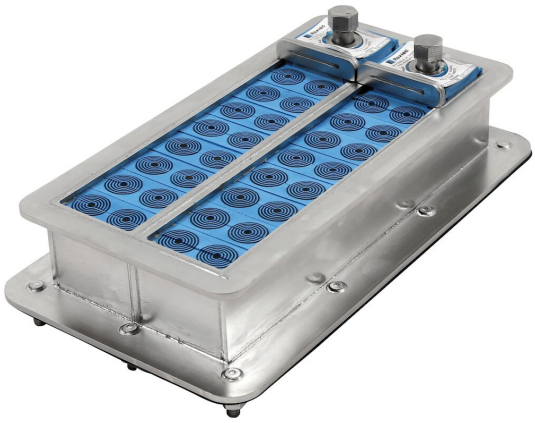

- 防啮齿动物
- 耐腐蚀
- 轻型
- 节省空间
- 允许使用预端接电缆

### 产品特性

IP/UL NEMA

### 安装结构

箱柜和机柜

### 安装类型

栓接

## 等级和证书

### 密封性

- IP 66/67, UL/NEMA 4,4X,12,13

## 框架尺寸

### mm/kg

下方的不同框架只是部分选择。 要了解全部的框架和配置チ请访问 roxtec.com。

| 标题 | 框架开口 | 密封空间 | 外部尺寸<br>WxHxD | 开孔尺寸<br>w x h | 重量 | 产品编号 |
|---|---|---|---|---|---|---|
| HD 16 FRAME ASSEMBLY AISI 316 | 1 | 40 x 160 | 83.8 x 236 x 60 | 64(+1/-0.5) x 216(+1/-0.5) | 1.6 | 193084 |
| HD 32 FRAME ASSEMBLY AISI316 | 2 | 40 x 160 | 130 x 236 x 60 | 110(+1/-0.5) x 216(+1/-0.5) | 2.3 | 109238 |

## 密封组件数据

### 密封组件

润滑脂



Multidiameter™ソ多径ゾHD 模块



HD 盲堵模块

如需了解详细信息チ请访问 roxtec.com。

# 预装配的穿隔套件

**mm/kg**

HD 16/10

HD 32/32

HD 32/20

HD 16/4

HD 32/8

HDLC/24+2


HD 32/41

HD 16/16

| 标题 | 配置 | 外部尺寸<br>WxHxD | 开孔尺寸<br>w x h | 重量 | 产品编号 |
|---|---|---|---|---|---|
| HD 16/10 | 2x (9.5-31.5), 8x (3.5-15.5) | 83.8 x 236 x 60 | 64(+1/-0.5) x 216(+1/-0.5) | 1.9 | 198297 |
| HD 32/32 | 32x (3.5-15.5) | 130 x 236 x 60 | 110(+1/-0.5) x 216(+1/-0.5) | 3.4 | 112279 |
| HD 32/20 | 16x (3.5-15.5), 4x (9.5-31.5) | 130 x 236 x 60 | 110(+1/-0.5) x 216(+1/-0.5) | 3.3 | 112278 |
| HD 16/4 | 4x (9.5-31.5) | 83.8 x 236 x 60 | 64(+1/-0.5) x 216(+1/-0.5) | 2 | 193101 |
| HD 32/8 | 8x (9.5-31.5) | 130 x 236 x 60 | 110(+1/-0.5) x 216(+1/-0.5) | 3.3 | 112276 |
| HDLC/24+2 | 2x (24.0-54.0), 24x (3.5-16.5) | 378 x 120 x 94 | 366(+1/-1) x 108(+1/-1) | 6.2 | 173277 |
| HD 32/41 | 1x (9.5-31.5), 16x (3.5-15.5), 24x (3.0-9.5) | 130 x 236 x 60 | 110(+1/-0.5) x 216(+1/-0.5) | 3.3 | 112280 |
| HD 16/16 | 16x (3.5-15.5) | 83.8 x 236 x 60 | 64(+1/-0.5) x 216(+1/-0.5) | 1.9 | 193100 |

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.
Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.
Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.
The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/
We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.
This document was generated on: 2024-04-26