




Roxtec G transit

Transit with flange, for welding.

The Roxtec G is a cable and pipe seal with a steel frame for welding. The transit can be used with a GE extension frame in galvanized steel to cover the depth of a thick wall.

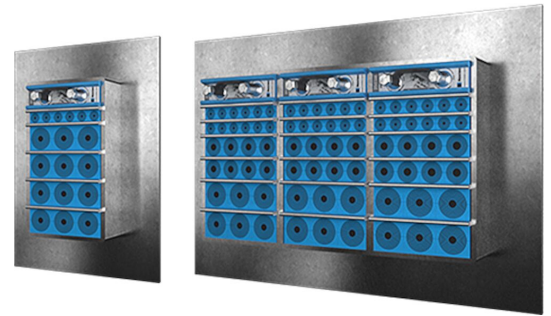

- Provides built-in spare capacity

Product characteristics



Fire rated



Watertight



Gas-tight



IP/UL NEMA

Structure of installation



Cabinets & enclosures



Metal

Mounting type



Welding

Ratings & certificates

Fire

- A-CLASS according to IMO 2010 FTP Code
- E/EI rating according to EN 13501
- F/T rating according to UL 1479

Tightness

- Gas: 2.5 bar (catastrophic)
- Water: 4 bar (catastrophic)
- IP 66/67 according to IEC 60529, IP 68, UL/NEMA 4,4X,12,13

Frame dimensions

in/lbs


The frame variants below are a limited selection. For the full range of frames and configurations, please visit [roxtec.com](https://www.roxtec.com).

Product	Frame openings	Packing space	External dimensions WxHxD	Aperture dimensions w x h	Weight	Art. no
G 6x1 PRIMED	1	4.724 x 7.087	9.941 x 13.78 x 2.362	7.402(+0.591/-0.591) x 11.417(+0.591/-0.591)	9.79	G006000000112
G 6x2 PRIMED	2	4.724 x 7.087	15.079 x 13.78 x 2.362	12.52(+0.591/-0.591) x 11.417(+0.591/-0.591)	16.2	G006000000212
G 6x3 PRIMED	3	4.724 x 7.087	20.217 x 13.78 x 2.362	17.677(+0.591/-0.591) x 11.417(+0.591/-0.591)	21.63	G006000000312
G 6x1 AISI316	1	4.724 x 7.087	9.941 x 13.78 x 2.362	7.402(+0.591/-0.591) x 11.417(+0.591/-0.591)	10.52	G006000000121
G 6x2 AISI316	2	4.724 x 7.087	15.079 x 13.78 x 2.362	12.52(+0.591/-0.591) x 11.417(+0.591/-0.591)	16.07	G006000000221
G 6x3 AISI316	3	4.724 x 7.087	20.217 x 13.78 x 2.362	17.677(+0.591/-0.591) x 11.417(+0.591/-0.591)	21.63	G006000000321



Sealing components

Sealing components



RM solid compensation module




Stayplate



sealing kit



Wedge & Wedge kit



RM module with Multidiameter™



Welding tools



Holder tools



Lubricant

For detailed information, please visit [roxtec.com](https://www.roxtec.com).

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2026-08-11



Roxtec ® and Multidiameter ® are registered trademarks of Roxtec in Sweden and/or other countries.