




Pultattava Roxtec G Ex -läpivienni

Ex-luokiteltu pulttiasennettava laipallinen läpivienni.

Pultattava Roxtec G Ex on suurtehyksinen kaapeliläpivienni, joka on sertifioitu Ex e- ja Ex tb -ympäristöihin -60...+80 °C lämpötiloihin. Kehys kiinnitetään pulttaamalla. Sisältää tiivisteet.

- Helppo ylläpitää ja tarkistaa
- Sisäänrakennettu lisäkapasiteetti

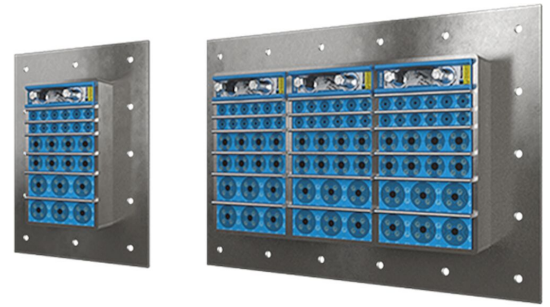

Tuotteen ominaisuudet



IP/UL NEMA



Ex-luokiteltu



EMI-suojaus



Sähtöturvallisuus



Paloluokiteltu

Asennusrakenne



Kaapit ja kotelot



Metalli

Asennustyyppi



Pulttaus

Luokitukset ja sertifioinnit

Paloluokka

- E/EI-luokitus standardin EN 13501 mukaan

Tiiviys

- IP 66/67


Tuki

- Potentialintasaus ja maadoitus
- Sähkömagneettinen suojaus
- Potentialintasaus
- Ex-luokiteltu

Kehyksen mitat

mm/kg

Alla olevat kehysvaihtoehdot ovat vain osa valikoimastamme. Kattava valikoima kehyksiä ja kokoonpanoja löytyy osoitteesta [roxtec.com](https://www.roxtec.com).

	Otsikko	Kehysaukot	Pakkaustila	Ulkomitat WxHxD	Aukon mitat w x h	Paino	Tuotenumero
	G 6x1 Ex GALV	1	120 x 180	252.5 x 350 x 60	147.5(+5/-5) x 245(+5/-5)	4	EXG006000000115
	G 6x2 Ex GALV	2	120 x 180	383 x 350 x 60	278(+5/-5) x 245(+5/-5)	7.3	EXG006000000215
	G 6x3 Ex GALV	3	120 x 180	513.5 x 350 x 60	408.5(+5/-5) x 245(+5/-5)	9.8	EXG006000000315
	G 6x1 Ex AISI316	1	120 x 180	252.5 x 350 x 60	147.5(+5/-5) x 245(+5/-5)	4.8	EXG006000000121
	G 6x2 Ex AISI316	2	120 x 180	383 x 350 x 60	278(+5/-5) x 245(+5/-5)	7.3	EXG006000000221
	G 6x3 Ex AISI316	3	120 x 180	513.5 x 350 x 60	408.5(+5/-5) x 245(+5/-5)	9.8	EXG006000000321



Tiivistyskomponenttien tiedot


Tiivistyskomponentit



Roxtec-asennusrasva



Wedge ja Wedgekit Ex



RM Ex -moduuli
Multidiameter™-teknologialla




RM Ex -umpimoduuli



Ex -välilevy




Wedge ja Wedgekit ES Ex



RM BG™ Ex -moduuli
Multidiameter™-teknologialla




RM BG™ Ex -umpimoduuli




RM ES Ex -moduuli
Multidiameter™-teknologialla



RM ES Ex -umpimoduuli



RM PE Ex -moduuli
Multidiameter™-teknologialla



RM PE Ex -umpimoduuli



Ex -kitti

Lisätietoja on osoitteessa [roxtec.com](https://www.roxtec.com).

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2024-04-10