




Roxtec G 볼트 체결형 Ex 트랜зит

볼트 체결을 위한 플랜지가 있는 Ex

Roxtec G 볼트 체결형 Ex는 -60~+80°C의 온도에서 Ex e 및 Ex tb 영역에 적합하도록 등급이 지정된 고밀도 케이블 트랜зит입니다. 프레임은 볼트 체결로 장착하며 구조물에 대해 밀봉하기 위한 개스킷이 포함되어 있습니다.

- 유지 및 검사 용이
- 예비 공간 포함 제공

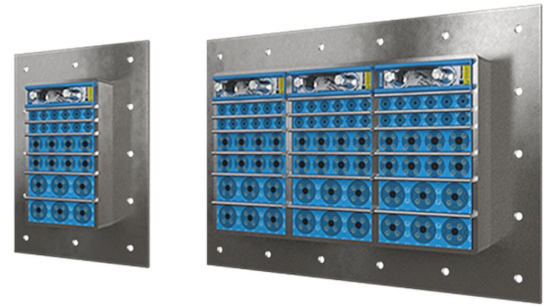

제품 특징점



IP/UL NEMA



Ex 등급



EMI 보



전기관련



내화

설치 구조



캐비닛 및 인클로저



금속

장착 유형



볼트체결

등급 및 인증

화재

- EN 13501에 따른 E/EI 등급

강도

- IP 66/67

지원

- Bonding과 Grounding
- 전자기 차폐
- 등전위화
- Ex 등급

프레임 치수

mm/kg

아래의 프레임 변화는 제한된 선택입니다. 프레임 및 구성의 전체 범위를 보려면 [roxtec.com](https://www.roxtec.com)을 방문하십시오.

구성	프레임 입구	모듈설치공간	외부 치수 WxHxD	홀 치수 w x h	무게	Art. 번호
G 6x1 Ex GALV	1	120 x 180	252.5 x 350 x 60	147.5(+5/-5) x 245(+5/-5)	4	EXG006000000115
G 6x2 Ex GALV	2	120 x 180	383 x 350 x 60	278(+5/-5) x 245(+5/-5)	7.3	EXG006000000215
G 6x3 Ex GALV	3	120 x 180	513.5 x 350 x 60	408.5(+5/-5) x 245(+5/-5)	9.8	EXG006000000315
G 6x1 Ex AISI316	1	120 x 180	252.5 x 350 x 60	147.5(+5/-5) x 245(+5/-5)	4.8	EXG006000000121
G 6x2 Ex AISI316	2	120 x 180	383 x 350 x 60	278(+5/-5) x 245(+5/-5)	7.3	EXG006000000221
G 6x3 Ex AISI316	3	120 x 180	513.5 x 350 x 60	408.5(+5/-5) x 245(+5/-5)	9.8	EXG006000000321



씰링 컴포넌트 데이터


씰링 컴포넌트




윤활제



Wedge 및 We



RM Ex 모듈(M ultidiamet)




RM Ex 솔리드



스테인플레이트 Ex



Wedge 및 We dgekit ES



RM BG™ Ex 모듈(Multidia meter™ 포함)




RM BG™ Ex




RM ES Ex 모듈(Multidia meter™ 포함)



RM ES Ex 솔



RM PE Ex 모듈(Multidia meter™ 포함)



RM PE Ex 솔



Ex 씰링 키트

자세한 내용은 [roxtec.com](https://www.roxtec.com)을 방문하십시오.

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use. Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended. Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses. The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>. We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright. This document was generated on: 2024-04-10