Roxtec

**Przeczytaj więcej o rozwiązaniu na roxtec.com**
https://www.roxtec.com/linktransit/pl-pl/solution/1098

# Przepust Roxtec G Ex do przykręcenia

Przepust Ex z kołnierzem, do przykręcenia.

Roxtec G Ex do przykręcenia to przepust o dużej gęstości upakowania kabli do środowisk Ex e i Ex tb z temperaturami od -60 do +80°C. Ramę mocowane są za pomocą śrub, zestaw zawiera uszczelkę instalowaną do konstrukcji.

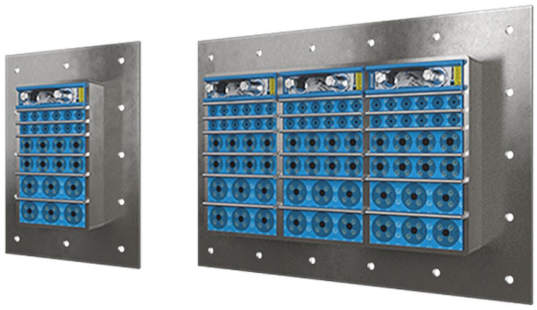

- Łatwe do kontrolowania i konserwowania
- Wbudowana przepustowość rezerwowa

### Charakterystyka produktu

IP/UL NEMA · Do środowisk Ex · Ochrona EMI · Ochrona elektryczna · Ognioodporne

### Struktura podłoża instalacyjnego

Szafy i obudowy · Metal

### Sposób montażu

Przykręcanie śrubami

## Klasy i certyfikaty

### Ogień

- Klasyfikacja E/EI zgodnie z normą EN 13501

### Szczelność

- IP 66/67

### Zgodność

- Wyrównywanie potencjałów i uziemienie
- Ekranowanie elektromagnetyczne
- Wyrównywanie potencjałów
- Do środowisk Ex

## Wymiary ramy

**mm/kg**

Poniżej przedstawiono tylko kilka przykładowych wariantów ram. Pełna oferta ram i konfiguracji jest dostępna w witrynie roxtec.com.




| Tytuł | Okna w ramach | Przestrzeń uszczelniana | Wymiary zewnętrzne WxHxD | Wymiary otworu w x h | Waga | Nr katalogowy |
|---|---|---|---|---|---|---|
| G 6x1 Ex GALV | 1 | 120 x 180 | 252.5 x 350 x 60 | 147.5(+5/-5) x 245(+5/-5) | 4 | EXG006000000115 |
| G 6x2 Ex GALV | 2 | 120 x 180 | 383 x 350 x 60 | 278(+5/-5) x 245(+5/-5) | 7.3 | EXG006000000215 |
| G 6x3 Ex GALV | 3 | 120 x 180 | 513.5 x 350 x 60 | 408.5(+5/-5) x 245(+5/-5) | 9.8 | EXG006000000315 |
| G 6x1 Ex AISI316 | 1 | 120 x 180 | 252.5 x 350 x 60 | 147.5(+5/-5) x 245(+5/-5) | 4.8 | EXG006000000121 |
| G 6x2 Ex AISI316 | 2 | 120 x 180 | 383 x 350 x 60 | 278(+5/-5) x 245(+5/-5) | 7.3 | EXG006000000221 |
| G 6x3 Ex AISI316 | 3 | 120 x 180 | 513.5 x 350 x 60 | 408.5(+5/-5) x 245(+5/-5) | 9.8 | EXG006000000321 |

# Dane elementów uszczelniających

## Elementy uszczelniające

Lubricant

Klin Ex i zestaw Ex Wedgekit

Pełny moduł kompensujący RM Ex

Moduł RM Ex z technologią Multidiameter™

Przekładka Ex

Klin ES Ex i zestaw ES Ex Wedgekit



Moduł RM BG™ Ex z technologią Multidiameter™

Pełny moduł kompensujący RM BG™ Ex



Moduł RM ES Ex z technologią Multidiameter™

Pełny moduł kompensujący RM ES Ex



Moduł RM PE Ex z technologią Multidiameter™



Pełny moduł kompensujący RM PE Ex

Zestaw uszczelniający Ex

Szczegółowe informacje można znaleźć na roxtec.com.

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.
Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.
Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.
The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/
We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.
This document was generated on: 2024-04-27