




Roxtec G

栓接防爆型穿隔系统

带法兰的防爆级穿隔系统适用于栓接。

Roxtec G 栓接防爆型穿隔系统适用于温度范围 -60 到 +80°C 的 Ex e 和 Ex tb 高电缆密度区域。其框架通过栓接安装于并包括用于密封结构的密封垫片。

- 易于维护和检查
- 具有内置备用容量

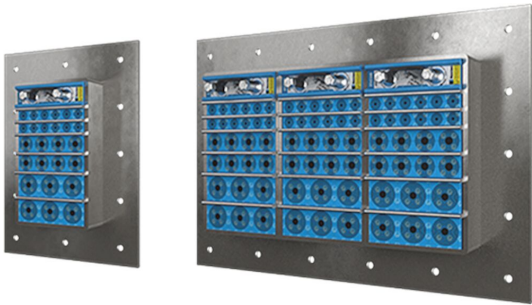

产品特性



IP/UL NEMA



防爆等级



EMI 保护



电气安全



耐火

安装结构



箱柜和机柜



金属

安装类型



栓接

等级和证书

火灾

- E/EI 等级符合 EN 13501

密封性

- IP 66/67

支持

- 连接和接地
- 电磁屏蔽
- 电位均衡
- 防爆等级

框架尺寸

mm/kg

下方的不同框架只是部分选择。要了解全部的框架和配置请访问 [roxtec.com](https://www.roxtec.com)。

标题	框架开口	密封空间	外部尺寸 W x H x D	开孔尺寸 w x h	重量	产品编号
G 6x1 Ex GALV	1	120 x 180	252.5 x 350 x 60	147.5(+5/-5) x 245(+5/-5)	4	EXG006000000115
G 6x2 Ex GALV	2	120 x 180	383 x 350 x 60	278(+5/-5) x 245(+5/-5)	7.3	EXG006000000215
G 6x3 Ex GALV	3	120 x 180	513.5 x 350 x 60	408.5(+5/-5) x 245(+5/-5)	9.8	EXG006000000315
G 6x1 Ex AISI316	1	120 x 180	252.5 x 350 x 60	147.5(+5/-5) x 245(+5/-5)	4.8	EXG006000000121
G 6x2 Ex AISI316	2	120 x 180	383 x 350 x 60	278(+5/-5) x 245(+5/-5)	7.3	EXG006000000221
G 6x3 Ex AISI316	3	120 x 180	513.5 x 350 x 60	408.5(+5/-5) x 245(+5/-5)	9.8	EXG006000000321



密封组件数据


密封组件



润滑脂



楔形压紧件和楔形压紧套件防爆型



Multidiameter™ V 多径 V RM 防爆模块




RM 防爆盲堵模块



隔层板防爆型




楔形压紧件和楔形压紧套件 ES 防爆型



Multidiameter™ V 多径 V RM BG™ 防爆模块




RM BG™ 防爆盲堵模块




Multidiameter™ V 多径 V RM ES 防爆模块



RM ES 防爆盲堵模块



Multidiameter™ V 多径 V RM PE 防爆模块



RM PE 防爆盲堵模块



防爆密封套件

如需了解详细信息请访问 [roxtec.com](https://www.roxtec.com)。

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2024-04-10