




Roxtec GH doorvoer

Doorvoer met flens, voor instorten of bevestiging met bouten.

De Roxtec GH is een kabel- en leidingafdichting die wordt ingestort in beton of met bouten wordt bevestigd op vlakke constructies. Het rechthoekige stalen frame is geschikt voor een hoge kabel- en leidingdichtheid. Met een GE contraframe kan de doorvoer in een dikkere wand worden afgewerkt.

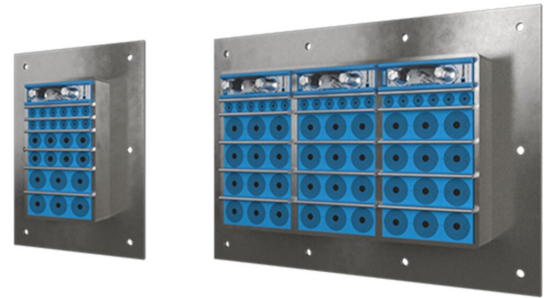

- Knaagdierbestendig
- Eenvoudig te onderhouden en inspecteren
- Biedt ingebouwde reservecapaciteit

Producteigenschappen



Brandvertragend



IP/UL NEMA

Installatiestructuur



Metaal



Gips



Beton

Montagetype



Bouten



Instorten

Specificaties en certificaten

Brand

- E/EI-classificatie volgens EN 13501
- E/EI-classificatie volgens EN 45545 E60
- F/T-classificatie volgens UL 1479


Dichtheid

- IP 66/67

Afmetingen frame

mm/kg

De onderstaande frame-uitvoeringen zijn een beperkte selectie. Ga naar [roxtec.com](https://www.roxtec.com) voor het volledige assortiment frames en configuraties.

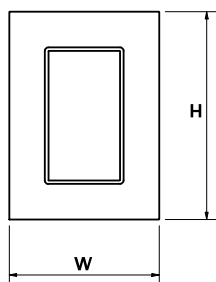	Titel	Frame-openingen	Vrije doorrooierte	Buitenafmetingen WxHxD	Afmetingen opening w x h	Gewicht	Art. nr.
	GH 6x1 GALV	1	120 x 180	252.5 x 350 x 60	148(+5/-5) x 245(+5/-5)	4.4	5GH0000007882
	GH 6x2 GALV	2	120 x 180	383 x 350 x 60	278(+5/-5) x 245(+5/-5)	7.5	5GH0000007828
	GH 6x3 GALV	3	120 x 180	513.5 x 350 x 60	409(+5/-5) x 245(+5/-5)	10.4	5GH0000008108
	GH 6x1 AISI316	1	120 x 180	252.5 x 350 x 60	148(+5/-5) x 245(+5/-5)	4.9	5GH0000008261
	GH 6x2 AISI316	2	120 x 180	383 x 350 x 60	278(+5/-5) x 245(+5/-5)	7.3	5GH0000008179
	GH 6x3 AISI316	3	120 x 180	513.5 x 350 x 60	409(+5/-5) x 245(+5/-5)	10.1	5GH0000009292




Gegevens van afdichtcomponenten

Afdichtcomponenten




vetstick



RM module met
Multidiameter™



Wedge en Wedgekit



Massieve RM
compensatiemodule



fixeerplaat



GE contraframe



fixeertools



afdichtset

Ga naar [roxtec.com](https://www.roxtec.com) voor uitgebreide informatie.

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2024-04-26