




Těsnění Roxtec H3 UG™

Prostup pro kabely vstupující skrze základy.

Těsnění Roxtec H3 UG™ je ideální volbou pro kabely vstupující skrze základy. Pracuje jako dlouhodobá bariéra zabraňující vstupu vody, plynu, vlhkosti a hlodavců. Jde o trojdílné těsnění, jež se snadno instaluje i za vlhka a v prostředích s protékající vodou. Průchod odolává extrémnímu ohýbání kabelů a má toleranci +3 mm vzhledem k otvoru, jakož i ukazatel signalizující požadovanou kompresi těsnění. Těsnění lze instalovat do průchodek, vedení a do odvrtaných otvorů.

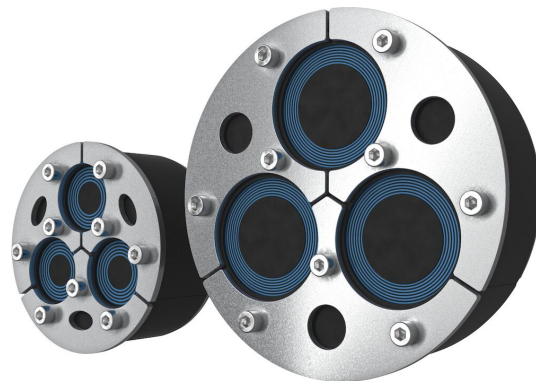

- Odolné proti hlodavcům
- Rychlá a snadná instalace
- Poskytuje vynikající mechanické ukotvení kabelu

Vlastnosti výrobku



Vodotěsné



Plynotěsné



IP/UL NEMA

Struktura instalace



Beton

Typ montáže



Stávající otvor



Stávající objímka

Specifikace a certifikáty

Těsnost

- Plynotěsnost: 0,3 baru (konstantní)
- Vodotěsnost: 0,3 baru (konstantní)
- IP 68

Údaje o izolačních komponentách

Těsnící komponenty



Těsnění H3 UG™




Mazivo Roxtec

Podrobné informace najdete na stránkách www.roxtec.com.




Konfigurované soupravy vstupů


mm/kg




H3-135 UG




H3-150 UG



H3-185 UG




H3-200 UG



H3-135 UG WOC



H3-150 UG WOC



H3-185 UG WOC

Název	Konfigurace	Rozměry otvoru Ø	Hmotnost Typ. č.
H3-135 UG	3x (23.0-43.0)	135 - 138	2.2 126281
H3-150 UG	3x (24.0-52.0)	150 - 153	2.5 151561
H3-185 UG	3x (48.0-64.0)	185 - 188	3.9 126283
H3-200 UG	3x (48.0-68.0)	200 - 203	4.3 117842
H3-135 UG WOC	3x (23.0-43.0)	135 - 138	2.3 151306
H3-150 UG WOC	3x (24.0-52.0)	150 - 153	2.6 155188
H3-185 UG WOC	3x (48.0-64.0)	185 - 188	3.5 151308
H3-200 UG WOC	3x (48.0-68.0)	200 - 203	4 108697
H3-150 UG INSERTABLE	3x (24.0-52.0)	150 - 153	2.6 155189
H3-200 UG INSERTABLE	3x (48.0-68.0)	200 - 203	4.4 127053
H3-150 UG INSERTABLE WOC	3x (24.0-52.0)	150 - 153	2.3 166396
H3-200 UG INSERTABLE WOC	3x (48.0-68.0)	200 - 203	3.7 164807

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2024-04-10