




Sello Roxtec H3 UG™

Sello para cables con entrada por cimientos.

El sello Roxtec H3 UG™ es idóneo para cables con entrada por cimientos y actúa como barrera de larga duración frente a inundaciones, gas, humedad y roedores. Es un sello de tres partes de fácil instalación y puede instalarse en condiciones húmedas y entornos con agua corriente. El sello resiste una flexión de cables extrema y tiene una tolerancia de +3 mm hacia la abertura y un indicador muestra cuándo se ha comprimido el sello. El sello se puede instalar en collarines, conductos y en agujeros perforados.

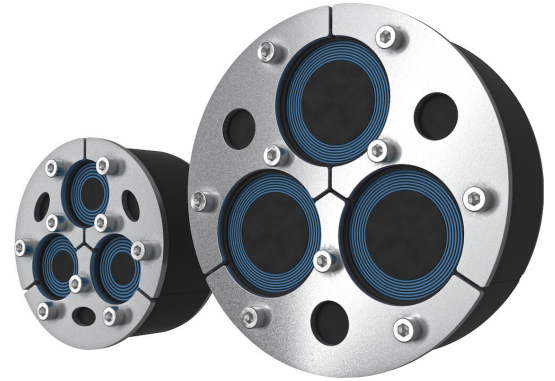

- Resistente a roedores
- Rápido y sencillo de instalar
- Ofrece una sujeción excelente de los cables

Características del producto



Estanco al agua



Estanco a gases



IP/UL NEMA

Estructura de instalación



Hormigón

Tipo de montaje



Huevo existente



Manguito existente


Calificaciones y certificados

Estanquidad

- Gas: 0,3 bar (constante)
- Agua: 0,3 bar (constante)
- IP 68

Datos de los componentes de sellado

Componentes de sellado



Sello H3 UG™




Lubricante Roxtec

Para obtener información detallada, visite [roxtec.com](https://www.roxtec.com).




Kits de sellos preconfigurados


mm/kg




H3-135 UG




H3-150 UG



H3-185 UG




H3-200 UG



H3-135 UG WOC



H3-150 UG WOC



H3-185 UG WOC

| Título | Configuración | Dimensiones de abertura Ø | Peso | N.º de art. |
|--------------------------|----------------|------------------------------|------|-------------|
| H3-135 UG | 3x (23.0-43.0) | 135 - 138 | 2.2 | 126281 |
| H3-150 UG | 3x (24.0-52.0) | 150 - 153 | 2.5 | 151561 |
| H3-185 UG | 3x (48.0-64.0) | 185 - 188 | 3.9 | 126283 |
| H3-200 UG | 3x (48.0-68.0) | 200 - 203 | 4.3 | 117842 |
| H3-135 UG WOC | 3x (23.0-43.0) | 135 - 138 | 2.3 | 151306 |
| H3-150 UG WOC | 3x (24.0-52.0) | 150 - 153 | 2.6 | 155188 |
| H3-185 UG WOC | 3x (48.0-64.0) | 185 - 188 | 3.5 | 151308 |
| H3-200 UG WOC | 3x (48.0-68.0) | 200 - 203 | 4 | 108697 |
| H3-150 UG INSERTABLE | 3x (24.0-52.0) | 150 - 153 | 2.6 | 155189 |
| H3-200 UG INSERTABLE | 3x (48.0-68.0) | 200 - 203 | 4.4 | 127053 |
| H3-150 UG INSERTABLE WOC | 3x (24.0-52.0) | 150 - 153 | 2.3 | 166396 |
| H3-200 UG INSERTABLE WOC | 3x (48.0-68.0) | 200 - 203 | 3.7 | 164807 |

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2024-04-10