



Roxtec H3 UG™ シール

建物基礎から引き込まれるケーブルに適した


Roxtec H3 UG™

シールは、建物の基礎から引き込まれるケーブルに適したシールで、水、ガス、湿気、ネズミに対して長期的なバリアを築きます。3

分割できるシールは施工性が高く、湿潤状態や流水下でも施工可能です。極端なケーブル屈曲にも耐えることができます。開口部寸法は +3mm

を許容するデザインで、シールの圧縮が十分かどうか確認できる便利なインジケーターが
ついています。スリーブ、電線管、コアドリル孔に取付可能です。

- 防鼠
- 迅速で簡単な施工
- 優れたケーブル把持力

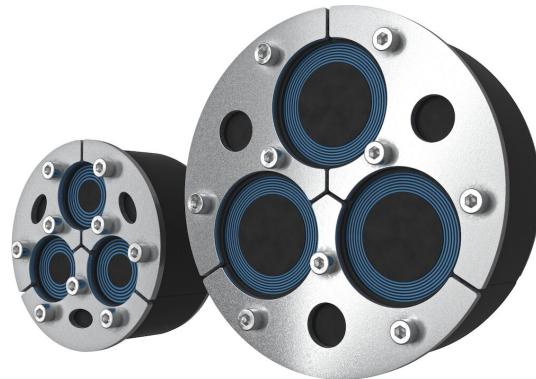

製品特性



防水



気密



IP/UL NEMA

設置構造



コンクリー

取り付けタイプ



既存の開口



既設スリー

規格と認証証明書

密性

- ガス: 0.3 パール (持続的)
- 水: 0.3 パール (持続的)
- IP 68

シーリングコンポーネントのデータ

シーリングコンポーネント



H3 UG™ シール




潤滑剤

詳細情報については、[roxtec.com](https://www.roxtec.com) をご覧ください。




設定済み貫通部キット


mm/kg




H3-135 UG




H3-150 UG



H3-185 UG




H3-200 UG



H3-135 UG WOC



H3-150 UG WOC



H3-185 UG WOC

タイトル	構成	開口部寸法 Ø	重量	部品番号
H3-135 UG	3x (23.0-43.0)	135 - 138	2.2	126281
H3-150 UG	3x (24.0-52.0)	150 - 153	2.5	151561
H3-185 UG	3x (48.0-64.0)	185 - 188	3.9	126283
H3-200 UG	3x (48.0-68.0)	200 - 203	4.3	117842
H3-135 UG WOC	3x (23.0-43.0)	135 - 138	2.3	151306
H3-150 UG WOC	3x (24.0-52.0)	150 - 153	2.6	155188
H3-185 UG WOC	3x (48.0-64.0)	185 - 188	3.5	151308
H3-200 UG WOC	3x (48.0-68.0)	200 - 203	4	108697
H3-150 UG INSERTABLE	3x (24.0-52.0)	150 - 153	2.6	155189
H3-200 UG INSERTABLE	3x (48.0-68.0)	200 - 203	4.4	127053
H3-150 UG INSERTABLE WOC	3x (24.0-52.0)	150 - 153	2.3	166396
H3-200 UG INSERTABLE WOC	3x (48.0-68.0)	200 - 203	3.7	164807

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2024-04-10