




Roxtec R -läpivienti ja SL R

Läpivienti kaapeleiden ja putkien tiivistämiseen rajoitetulla alueella.

Roxtecin SL R on R-kehysten kaapeli- ja putkiläpivienti, jossa on holkki pyöreisiin reikiin. Läpivientikehysten integroitu puristin toimii laajenemalla. Perusmoduulit sopivat erikokoisiin kaapeleihin ja putkiin. Niitä voi käyttää läpiviennin lisäkapasiteetin rakentamiseen. Kääntöpuolen verkko suojaa vaakataso asennuksissa (ei R 70:ssä ja R 75:ssä). Holkki hitsataan rakenteeseen.

- Jyrsijäsuojattu
- Helppo ylläpitää ja tarkistaa

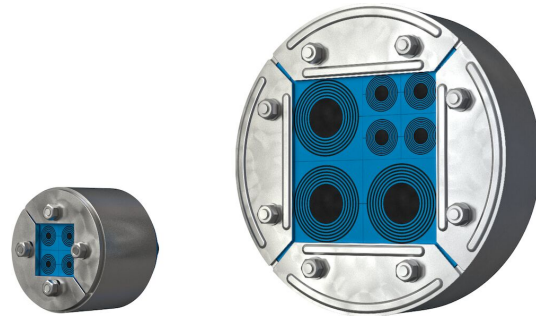

Tuotteen ominaisuudet



Paloluokiteltu



Vesitiivis



Kaasutiivis

Asennusrakenne



Metalli

Asennustyyppi



Hitsaus

Luokitukset ja sertifiointit

Paloluokka

- A-luokka IMO 2010 -standardin palokoe-koodin (IMO 2010 FTP Code) mukaan
- E/EI-luokitus standardin EN 45545 E30 mukaan
- H-CLASS IMO 2010 FTP Code + -hiilivetypalon kuormituskäyrän mukaan

Tiiviys

- Kaasutiivis: 2,5 bar (katastrofi)
- Vesitiivis: 4 bar (katastrofi)

Kehyksen mitat

mm/kg

Alla olevat kehysvaihtoehdot ovat vain osa valikoimastamme. Kattava valikoima kehyksiä ja kokoonpanoja löytyy osoitteesta [roxtec.com](https://www.roxtec.com).

Otsikko	Pakkaustila	Aukon mitat Ø	Paino	Tuotenro
R 50 AISI316	30 x 30	50 - 52	0.21	5R00000012875
R 75 AISI316	40 x 40	75 - 77	0.5	R000000751021
R 70 AISI316	40 x 40	70 - 72	0.45	R000000701021
R 100 AISI316	60 x 60	100 - 102	0.8	R000001001021
R 100 GALV	60 x 60	100 - 102	0.8	R000001001018
R 125 AISI316	80 x 80	125 - 127	1.1	R000001251021
R 125 GALV	80 x 80	125 - 127	1.1	R000001251018
R 127 AISI316	80 x 80	127 - 129	1.1	R000001271021
R 127 GALV	80 x 80	127 - 129	1.1	R000001271018
R 150 AISI316	90 x 90	150 - 152	1.6	R000001501021
R 150 GALV	90 x 90	150 - 152	1.6	R000001501018
R 200 AISI316	120 x 120	200 - 202	2.6	R000002001021
R 200 GALV	120 x 120	200 - 202	2.6	R000002001018



Tiivistyskomponenttien tiedot


Tiivistyskomponentit




SL R -holkki



Roxtec-asennusrasva



RM -moduuli
Multidiameter™-teknologialla



RM -umpimoduuli

Lisätietoja on osoitteessa [roxtec.com](https://www.roxtec.com).

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2024-04-19