




Roxtec RS OMD-tætning

Gennemføring med yderside, der kan tilpasses, så den passer til sleeve, der ikke har standard størrelse.

Roxtec RS med OMD er en tætning med metal-sleeve til enkeltkabler eller -rør. Gennemføringstætningen har to halvdele med aftagelige lag, så den kan tilpasses kabler og rør af forskellig størrelse. Gennemføringen har også lag på ydersiden, så den kan tilpasses sleeve størrelser og åbninger, der ikke er standardløsninger. Gennemføringen design gør den nem at montere omkring eksisterende kabler eller rør.

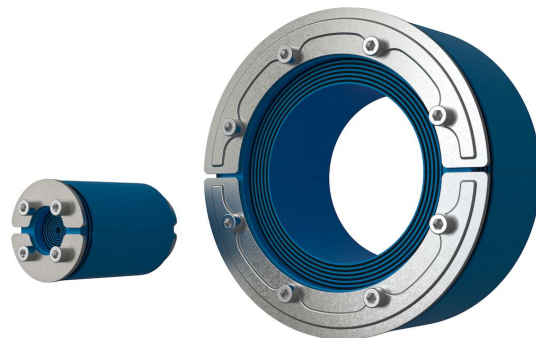

- Gnaverbestandig
- Perfekt til eftermontage
- Hurtig og nem at montere

Produktegenskaber



Brandklassificeret



Vandtæt



Gastæt

Byggekonstruktion



Metal



Beton

Monteringstype



Eksisterende åbning



Oprindeligt sleeve

Normeringer og certifikater

Brand

- A-KLASSE i henhold til IMO 2010 FTP-kode
- E/EI-klassificering i henhold til EN 13501

Tæthed

- Gas: 2,67 bar (katastrofe)
- Vand: 4 bar (katastrofe)

Data om tætningskomponenter

Tætningskomponenter



RS OMD-tætninger




Lubrikant

For merne information, besøg venligst [roxtec.com](https://www.roxtec.com).




Foreslåede tætningskit


mm/kg




RS 100 OMD AISI316
WOC




RS 125 OMD AISI316
WOC




RS 150 OMD AISI316
WOC




RS 25 OMD AISI316




RS 31 OMD AISI316




RS 43 OMD AISI316




RS 50 OMD AISI316



RS 68 OMD AISI316



RS 100 OMD AISI316



RS 125 OMD AISI316

Title	Konfiguration	Åbningsmål Ø	Vægt	Art.-nr.
RS 100 OMD AISI316 WOC	1x (48.0-70.0)	101 - 108	1	RSO0001001021
RS 125 OMD AISI316 WOC	1x (66.0-98.0)	126 - 143	1.6	RSO0001251021
RS 150 OMD AISI316 WOC	1x (93.0-119.0)	151 - 168	2	RSO0001501021
RS 25 OMD AISI316	1x (3.6-12.0)	26 - 30	0.08	RSO0100251021
RS 31 OMD AISI316	1x (4.0-17.0)	32 - 35.5	0.09	RSO0100311021
RS 43 OMD AISI316	1x (4.0-23.0)	44 - 51	0.32	RSO0100431021
RS 50 OMD AISI316	1x (8.0-30.0)	51 - 58	0.41	RSO0100501021
RS 68 OMD AISI316	1x (26.0-48.0)	69 - 76.5	0.6	RSO0100681021
RS 100 OMD AISI316	1x (48.0-70.0)	101 - 108	1.2	RSO0101001021
RS 125 OMD AISI316	1x (66.0-98.0)	126 - 143	2	RSO0101251021

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2024-04-05