




Roxtec RS X seal

Transit for use when welding is not allowed, recommended or desired.

The Roxtec RS X is a non-weld seal with sleeve for single cables or pipes. The transit is ideal for retrofit or when welding is not allowed, recommended or desired. The sleeve has a rubber gasket on the outside and expands in the hole to firm attachment as the bolts are tightened. The RS X seal is adaptable to cables and pipes of different sizes through removable layers.

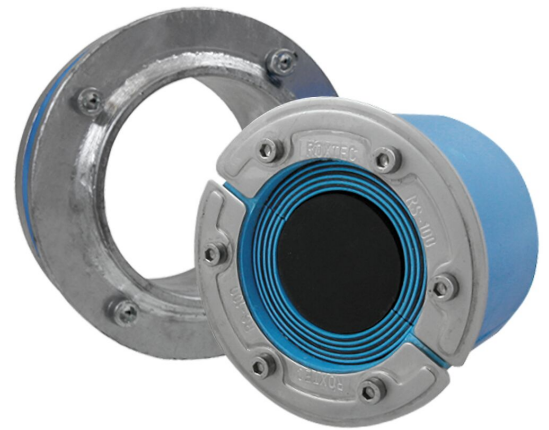

- Perfect for retrofit

Product characteristics



Fire rated



Watertight



Gas-tight

Structure of installation



Metal

Mounting type



Existing hole



Bolting

Ratings & certificates

Fire

- A-CLASS according to IMO 2010 FTP Code

Tightness


- Gas: 2.67 bar (catastrophic)
- Water: 4 bar (catastrophic)

Sealing components

Sealing components



Lubricant



RS X kit

For detailed information, please visit [roxtec.com](https://www.roxtec.com).



Pre-configured transit kits


mm/kg




RS X 43 AISI316/GALV




RS X 50 AISI316/GALV




RS X 75 AISI316/GALV




RS X 100 AISI316/GALV




RS X 125 AISI316/GALV




RS X 100 AISI316
WOC/GALV




RS X 125 AISI316
WOC/GALV



RS X 150 AISI316
WOC/GALV



RS X 175 AISI316
WOC/GALV



RS X 200 AISI316
WOC/GALV

Name	Capacity (quantity x size)	External dimensions ØxD (mm)	Weight (kg)	Art. No
RS X 43 AISI316/GALV	1x (4.0-23.0)	92 x 65	0.84	RSXG100431021
RS X 50 AISI316/GALV	1x (8.0-30.0)	100 x 65	1.4	RSXG100501021
RS X 75 AISI316/GALV	1x (24.0-54.0)	125 x 65	2.19	RSXG100751021
RS X 100 AISI316/GALV	1x (48.0-70.0)	155 x 65	3.2	RSXG101001021
RS X 125 AISI316/GALV	1x (66.0-98.0)	180 x 65	2.8	RSXG101251021
RS X 100 AISI316 WOC/GALV	1x (48.0-70.0)	155 x 65	3	RSXG001001021
RS X 125 AISI316 WOC/GALV	1x (66.0-98.0)	180 x 65	3.97	RSXG001251021
RS X 150 AISI316 WOC/GALV	1x (93.0-119.0)	209 x 65	5.2	RSXG001501021
RS X 175 AISI316 WOC/GALV		230 x 65	5.03	RSXG001751021
RS X 200 AISI316 WOC/GALV		260 x 65	6.55	RSXG002001021

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2026-08-28



Roxtec ® and Multidiameter ®
are registered trademarks of Roxtec
in Sweden and/or other countries.