




Roxtec SFHM 관통 장비

금속 프레임과 구조물에 볼트로 장착할 수 있는 플랜지를 갖춘 관통 장비임

Roxtec SFHM(개스킷 포함)은 멀티 케이블 및 파이프 관통 장비로서 다양한 재질로 공급 가능하며 단일 오프닝 또는 다양한 조합에 사용할 수 있습니다. 플랜지형 관통 프레임은 10 mm 두께의 금속으로 제작되며 볼트로 구조물에 장착할 수 있는 TSL 씰링 스트립이 있습니다. 표준 씰링 모듈은 다양한 규격의 케이블과 파이프에 적용 가능하며 관통 장비 내에 스페어 공간을 만드는 데 사용할 수 있습니다.

- 설치류 차단
- 유지 및 검사 용이

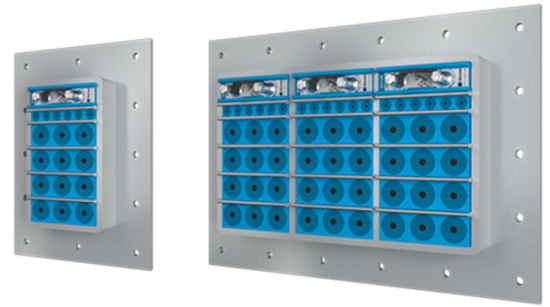

제품 특징점



내화



방수

설치 구조



금속

장착 유형



볼트체결

등급 및 인증

화재

- IMO 2010 FTP 코드에 따른 A등급
- IMO 2010 FTP Code + HC-화재 부하 곡선에 따른 H등급
- ISO 22899-1 및 OTI 95634에 따른 Jetfire

강도

- 물: 4 Bar(일시적인)

프레임 치수

mm/kg

아래의 프레임 변화는 제한된 선택입니다. 프레임 및 구성의 전체 범위를 보려면 [roxtec.com](https://www.roxtec.com)을 방문하십시오.

	구성	프레임 입구	모듈설치공간	외부 치수 WxHxD	홀 치수 w x h	무게	Art. 번호
	SFHM 6x1 ALU INCL TSL 15x6	1	120 x 180	260.5 x 358 x 60		2.8	5SFHM00008469
	SFHM 6x2 ALU INCL TSL 15x6	2	120 x 180	391 x 358 x 60		2.8	5SFHM00008461
	SFHM 6x3 ALU INCL TSL 15x6	3	120 x 180	521.5 x 358 x 60		5.4	154739
	SFHM 6x1 PRIMED INCL TSL 15x6	1	120 x 180	260.5 x 358 x 60		8.1	5SFHM00009087
	SFHM 6x2 PRIMED INCL TSL 15x6	2	120 x 180	391 x 358 x 60		11.8	120964
	SFHM 6x3 PRIMED INCL TSL 15x6	3	120 x 180	521.5 x 358 x 60		15.3	123095
	SFHM 6x1 AISI316 INCL TSL 15x6	1	120 x 180	260.5 x 358 x 60		8	5SFHM00007863
	SFHM 6x2 AISI316 INCL TSL 15x6	2	120 x 180	391 x 358 x 60		11.5	5SFHM00009102
	SFHM 6x3 AISI316 INCL TSL 15x6	3	120 x 180	521.5 x 358 x 60		14.9	5SFHM00007864



씰링 컴포넌트 데이터


씰링 컴포넌트




윤활제



Wedge 및 We



RM 모듈(Mult idiameter™)



RM 솔리드 모듈



스테이플레이트



홀더 도구



씰링 키트

액세서리

자세한 내용은 [roxtec.com](https://www.roxtec.com)을 방문하십시오.

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use. Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended. Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses. The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/> We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright. This document was generated on: 2024-04-09