




# Roxtec SK 穿隔系统

这种穿隔系统提供用于焊接到结构上的加深金属框架。

Roxtec SK 电缆和管道穿隔系统拥有扩展厚度功能于可提供采用不同材料制成的型号于用于单开孔或多种组合开孔。其金属穿隔框架通过焊接安装于用于有角度的安装于以容纳不从一条直线通过甲板或舱壁的硬型电缆。其密封系统还允许增加密封空间和结构之间的距离。这种标准密封模块可灵活适配各种规格的电缆和管道于并可在穿隔系统内提供备用容量。

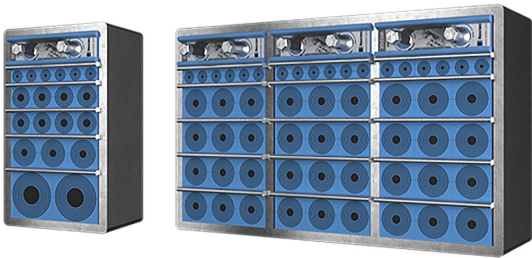

- 易于维护和检查

### 产品特性



耐火



水密



气密

### 安装结构



金属

### 安装类型



焊接

## 等级和证书

### 火灾

- A 级符合 IMO 2010 FTP 规范
- E/EI 等级符合 EN 45545 E60
- H 级符合 IMO 2010 FTP 规范 + HC 火灾荷载曲线
- 喷射火符合 ISO 22899-1 和 OTI 95634 标准

### 密封性

- 气体: 2.5 bar 洪水
- 水: 4 bar 洪水

## 框架尺寸

mm/kg


下方的不同框架只是部分选择。要了解全部的框架和配置于请访问 [roxtec.com](https://www.roxtec.com)。

| 标题             | 框架开口 | 密封空间      | 外部尺寸<br>W x H x D | 开孔尺寸<br>w x h           | 重量   | 产品编号          |
|----------------|------|-----------|-------------------|-------------------------|------|---------------|
| SK 6x1 ALU     | 1    | 120 x 180 | 140.5 x 238 x 100 | 143(+1/-1) x 240(+1/-1) | 1.8  | 5SK0000004854 |
| SK 6x2 ALU     | 2    | 120 x 180 | 271 x 238 x 100   | 273(+1/-1) x 240(+1/-1) | 2.8  | 5SK0000010929 |
| SK 6x3 ALU     | 3    | 120 x 180 | 401.5 x 238 x 100 | 404(+1/-1) x 240(+1/-1) | 4    | 170071        |
| SK 6x1 PRIMED  | 1    | 120 x 180 | 140.5 x 238 x 100 | 143(+1/-1) x 240(+1/-1) | 5.2  | 5SK0000004397 |
| SK 6x2 PRIMED  | 2    | 120 x 180 | 271 x 238 x 100   | 273(+1/-1) x 240(+1/-1) | 8.3  | 5SK0000004504 |
| SK 6x3 PRIMED  | 3    | 120 x 180 | 401.5 x 238 x 100 | 404(+1/-1) x 240(+1/-1) | 11   | 5SK0000004399 |
| SK 6x1 AISI316 | 1    | 120 x 180 | 140.5 x 238 x 100 | 143(+1/-1) x 240(+1/-1) | 5.3  | 5SK0000007066 |
| SK 6x2 AISI316 | 2    | 120 x 180 | 271 x 238 x 100   | 273(+1/-1) x 240(+1/-1) | 9    | 5SK0000003590 |
| SK 6x3 AISI316 | 3    | 120 x 180 | 401.5 x 238 x 100 | 404(+1/-1) x 240(+1/-1) | 11.8 | 5SK0000004198 |




## 密封组件数据

### 密封组件



Multidiameter™ 多径 RM 模块



RM 盲堵模块



密封套件



隔层板



润滑脂



焊接工具



支架工具



楔形压紧件和楔形压紧套件

如需了解详细信息请访问 [roxtec.com](https://www.roxtec.com)。

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2025-07-03