




Roxtec Sleeve-it™ Waterproof penetration seal

Penetration seal for plastic pipes for basic protection against fire, gas and water.

The Roxtec Sleeve-it™ Waterproof penetration seal is a light-weight solution. Its stainless steel casing contains intumescent material to block the penetration in case of fire and its rubber grommet is engineered for a range of pipe sizes. It is installed from one side and is available for both steel and aluminum structures.

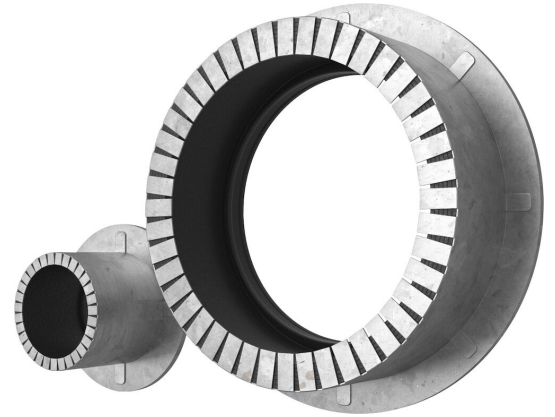

- Light-weight
- Area efficient
- Quick and easy to install

Product characteristics



Fire rated



Watertight

Structure of installation



Metal

Mounting type



Welding

Ratings & certificates

Fire

- A-CLASS according to IMO 2010 FTP Code
- B-CLASS according to IMO 2010 FTP Code

Tightness

- Water: 1 bar (catastrophic)

Sealing components

Sealing components



Sleeve-it™ Waterproof penetration seal

For detailed information, please visit [roxtec.com](https://www.roxtec.com).



Pre-configured transit kits

in/lbs

							
SLEEVE-IT WT MAR140M ALU	SLEEVE-IT WT MAR40M ALU	SLEEVE-IT WT-MAR75M	SLEEVE-IT WT MAR50M ALU (1.5")	SLEEVE-IT WT-MAR140M	SLEEVE-IT WT-MAR32M	SLEEVE-IT WT-MAR225M	SLEEVE-IT WT MAR75M ALU
							
SLEEVE-IT WT-MAR90M (3")	SLEEVE-IT WT-MAR160M	SLEEVE-IT WT-MAR25M	SLEEVE-IT WT-MAR125M	SLEEVE-IT WT-MAR60M (2")	SLEEVE-IT WT MAR50M ALU	SLEEVE-IT WT MAR63M ALU	SLEEVE-IT WT MAR110M ALU
							
SLEEVE-IT WT MAR200M ALU	SLEEVE-IT WT-MAR40M	SLEEVE-IT WT-MAR200M	SLEEVE-IT WT MAR20M ALU	SLEEVE-IT WT MAR160M ALU	SLEEVE-IT WT-MAR90M	SLEEVE-IT WT-MAR50M (1.5")	SLEEVE-IT WT MAR90M ALU
							
SLEEVE-IT WT MAR25M ALU	SLEEVE-IT WT-MAR16M	SLEEVE-IT WT MAR60M ALU (2")	SLEEVE-IT WT-MAR63M	SLEEVE-IT WT-MAR20M	SLEEVE-IT WT-MAR50M	SLEEVE-IT WT-MAR110M	SLEEVE-IT WT-MAR115M (4")
							
SLEEVE-IT WT-MAR169M (6")	SLEEVE-IT WT MAR16M ALU	SLEEVE-IT WT MAR32M ALU	SLEEVE-IT WT MAR115M ALU (4")	SLEEVE-IT WT MAR90M ALU (3")	SLEEVE-IT WT MAR125M ALU	SLEEVE-IT WT MAR169M ALU (6")	



Product	Configuration	Aperture dimensions Ø	Weight	Art. no
SLEEV-IT WT MAR140M ALU		7.559 - 7.795	2.4	151274
SLEEV-IT WT MAR40M ALU		2.874 - 3.11	0.66	151263
SLEEV-IT WT-MAR75M		4.213 - 4.606	1.7	106334
SLEEV-IT WT MAR50M ALU (1.5")		3.189 - 3.425	0.66	151264
SLEEV-IT WT-MAR140M		6.89 - 7.283	3.5	106347
SLEEV-IT WT-MAR32M		2.087 - 2.48	0.84	106322
SLEEV-IT WT-MAR225M		11.22 - 11.614	8.3	106356
SLEEV-IT WT MAR75M ALU		4.606 - 4.843	1.1	151268
SLEEV-IT WT-MAR90M (3")		5.079 - 5.472	2.2	106365
SLEEV-IT WT-MAR160M		8.268 - 8.661	4	106350
SLEEV-IT WT-MAR25M		1.811 - 2.205	0.75	106319
SLEEV-IT WT-MAR125M		6.575 - 6.969	3	106344
SLEEV-IT WT-MAR60M (2")		3.346 - 3.74	1.1	106362
SLEEV-IT WT MAR50M ALU		3.268 - 3.504	0.66	151265
SLEEV-IT WT MAR63M ALU		3.937 - 4.173	0.88	151267
SLEEV-IT WT MAR110M ALU		6.181 - 6.417	1.8	151271
SLEEV-IT WT MAR200M ALU		10.315 - 10.551	4	151277
SLEEV-IT WT-MAR40M		2.52 - 2.913	0.9	106325
SLEEV-IT WT-MAR200M		9.646 - 10.039	6.6	106353
SLEEV-IT WT MAR20M ALU		2.087 - 2.323	0.4	151260
SLEEV-IT WT MAR160M ALU		8.346 - 8.583	2.4	151275
SLEEV-IT WT-MAR90M		5 - 5.394	2.1	106337
SLEEV-IT WT-MAR50M (1.5")		2.913 - 3.307	1.1	106359
SLEEV-IT WT MAR90M ALU		5.197 - 5.433	1.5	151270
SLEEV-IT WT MAR25M ALU		2.323 - 2.559	0.44	151261
SLEEV-IT WT-MAR16M		1.417 - 1.811	0.55	106315
SLEEV-IT WT MAR60M ALU (2")		3.819 - 4.055	0.88	151266
SLEEV-IT WT-MAR63M		3.465 - 3.858	1.2	106331
SLEEV-IT WT-MAR20M		1.732 - 2.126	0.71	106316
SLEEV-IT WT-MAR50M		2.913 - 3.307	1.1	106328
SLEEV-IT WT-MAR110M		5.827 - 6.22	2.6	106341
SLEEV-IT WT-MAR115M (4")		5.787 - 6.181	2.6	106371
SLEEV-IT WT-MAR169M (6")		8.661 - 9.055	4.5	106373
SLEEV-IT WT MAR16M ALU		1.85 - 2.087	0.33	151259
SLEEV-IT WT MAR32M ALU		2.598 - 2.835	0.66	151262
SLEEV-IT WT MAR115M ALU (4")		6.417 - 6.654	2	151272
SLEEV-IT WT MAR90M ALU (3")		5.157 - 5.394	1.5	151269
SLEEV-IT WT MAR125M ALU		6.772 - 7.008	2.2	151273
SLEEV-IT WT MAR169M ALU (6")		8.701 - 8.937	3.1	151276

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2024-04-27