




# Bague étanche à l'eau Roxtec Sleeve-it™

Solution étanche pour tuyauteries en plastique pour une protection de base contre le gaz et l'eau.

La solution étanche Roxtec Sleeve-it™ pour tuyauteries en plastique est constituée d'un collier en acier inoxydable composé de plusieurs couches d'un matériau intumescent qui réagit à la chaleur pour protéger le passage une fois que la tuyauterie en plastique commence à se ramollir. Son anneau en caoutchouc est conçu pour assurer l'étanchéité de tuyauteries en plastique de taille spécifique. Le passage se soude aux plates-formes et cloisons étanches sans manchon supplémentaire.

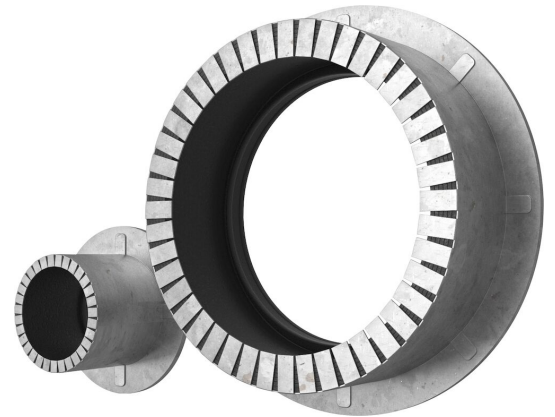

- Léger
- Surface optimisée
- Installation facile et rapide

## Caractéristiques du produit



Coupe-feu



Étanche à l'eau

## Structure d'installation



Métal

## Type de fixation



Soudage

## Classements et certificats

### Feu

- CLASSE A conformément au code FTP IMO 2010
- CLASSE B conformément au code FTP IMO 2010

### Étanchéité

- Eau: 1 bars (catastrophique)

## Éléments d'étanchéité

### Éléments d'étanchéité



Bague étanche à l'eau Sleeve-it™

Pour plus d'informations, veuillez consulter [roxtec.com](https://www.roxtec.com).



# Kits de passage préconfigurés

mm/kg

							
SLEEVE IT WT MAR140M ALU	SLEEVE IT WT MAR40M ALU	SLEEVE IT WT MAR75M	SLEEVE IT WT MAR50M ALU (1.5")	SLEEVE IT WT MAR140M	SLEEVE IT WT MAR32M	SLEEVE IT WT MAR225M	SLEEVE IT WT MAR75M ALU
							
SLEEVE IT WT MAR90M (3")	SLEEVE IT WT MAR160M	SLEEVE IT WT MAR25M	SLEEVE IT WT MAR125M	SLEEVE IT WT MAR60M (2")	SLEEVE IT WT MAR50M ALU	SLEEVE IT WT MAR63M ALU	SLEEVE IT WT MAR110M ALU
							
SLEEVE IT WT MAR200M ALU	SLEEVE IT WT MAR40M	SLEEVE IT WT MAR200M	SLEEVE IT WT MAR20M ALU	SLEEVE IT WT MAR160M ALU	SLEEVE IT WT MAR90M	SLEEVE IT WT MAR50M (1.5")	SLEEVE IT WT MAR90M ALU
							
SLEEVE IT WT MAR25M ALU	SLEEVE IT WT MAR16M	SLEEVE IT WT MAR60M ALU (2")	SLEEVE IT WT MAR63M	SLEEVE IT WT MAR20M	SLEEVE IT WT MAR50M	SLEEVE IT WT MAR110M	SLEEVE IT WT MAR115M (4")
							
SLEEVE IT WT MAR169M (6")	SLEEVE IT WT MAR16M ALU	SLEEVE IT WT MAR32M ALU	SLEEVE IT WT MAR115M ALU (4")	SLEEVE IT WT MAR90M ALU (3")	SLEEVE IT WT MAR125M ALU	SLEEVE IT WT MAR169M ALU (6")	



Titre	Configuration	Dimensions d'ouverture Ø	Poids	N° art.
SLEEV-IT WT MAR140M ALU		192 - 198	1.1	151274
SLEEV-IT WT MAR40M ALU		73 - 79	0.3	151263
SLEEV-IT WT-MAR75M		107 - 117	0.8	106334
SLEEV-IT WT MAR50M ALU (1.5")		81 - 87	0.3	151264
SLEEV-IT WT-MAR140M		175 - 185	1.6	106347
SLEEV-IT WT-MAR32M		53 - 63	0.38	106322
SLEEV-IT WT-MAR225M		285 - 295	3.8	106356
SLEEV-IT WT MAR75M ALU		117 - 123	0.5	151268
SLEEV-IT WT-MAR90M (3")		129 - 139	1	106365
SLEEV-IT WT-MAR160M		210 - 220	1.8	106350
SLEEV-IT WT-MAR25M		46 - 56	0.34	106319
SLEEV-IT WT-MAR125M		167 - 177	1.4	106344
SLEEV-IT WT-MAR60M (2")		85 - 95	0.5	106362
SLEEV-IT WT MAR50M ALU		83 - 89	0.3	151265
SLEEV-IT WT MAR63M ALU		100 - 106	0.4	151267
SLEEV-IT WT MAR110M ALU		157 - 163	0.8	151271
SLEEV-IT WT MAR200M ALU		262 - 268	1.8	151277
SLEEV-IT WT-MAR40M		64 - 74	0.41	106325
SLEEV-IT WT-MAR200M		245 - 255	3	106353
SLEEV-IT WT MAR20M ALU		53 - 59	0.18	151260
SLEEV-IT WT MAR160M ALU		212 - 218	1.1	151275
SLEEV-IT WT-MAR90M		127 - 137	1	106337
SLEEV-IT WT-MAR50M (1.5")		74 - 84	0.48	106359
SLEEV-IT WT MAR90M ALU		132 - 138	0.7	151270
SLEEV-IT WT MAR25M ALU		59 - 65	0.2	151261
SLEEV-IT WT-MAR16M		36 - 46	0.25	106315
SLEEV-IT WT MAR60M ALU (2")		97 - 103	0.4	151266
SLEEV-IT WT-MAR63M		88 - 98	0.5	106331
SLEEV-IT WT-MAR20M		44 - 54	0.32	106316
SLEEV-IT WT-MAR50M		74 - 84	0.5	106328
SLEEV-IT WT-MAR110M		148 - 158	1.2	106341
SLEEV-IT WT-MAR115M (4")		147 - 157	1.2	106371
SLEEV-IT WT-MAR169M (6")		220 - 230	2	106373
SLEEV-IT WT MAR16M ALU		47 - 53	0.15	151259
SLEEV-IT WT MAR32M ALU		66 - 72	0.3	151262
SLEEV-IT WT MAR115M ALU (4")		163 - 169	0.9	151272
SLEEV-IT WT MAR90M ALU (3")		131 - 137	0.7	151269
SLEEV-IT WT MAR125M ALU		172 - 178	1	151273
SLEEV-IT WT MAR169M ALU (6")		221 - 227	1.4	151276

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use. Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended. Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses. The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/> We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright. This document was generated on: 2024-04-23