




Roxtec H3 seal

Openable transit for sealing around existing cables/pipes.

The Roxtec H3 is a round seal for cable and pipe entries in metal sleeves or core drilled holes. The split construction of the seal makes it easy to install around existing cables and pipes or cables in trefoil formation. The transit has fittings of acid-proof stainless steel and is adaptable to cables and pipes of different sizes. The seal is also available with smaller front fittings to enable insertion into a hole.

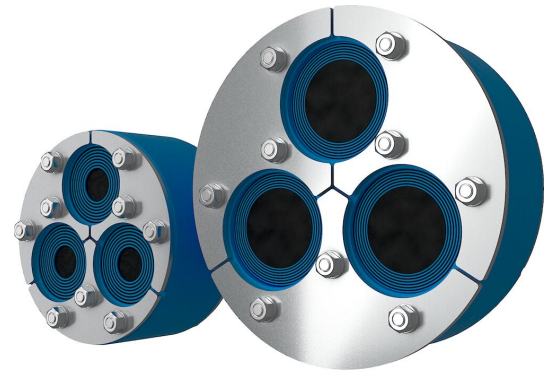

- Rodent resistant
- Perfect for retrofit
- Quick and easy to install

Product characteristics



Fire rated



Watertight



Gas-tight



IP/UL NEMA

Structure of installation



Metal



Concrete

Mounting type



Existing hole



Existing sleeve

Ratings & certificates

Fire

- A-CLASS according to IMO 2010 FTP Code
- E/EI rating according to EN 13501

Tightness


- Gas: 2.67 bar (catastrophic)
- Water: 4 bar (catastrophic)
- IP 68

Sealing components

Sealing components



Lubricant




H3 seal

For detailed information, please visit [roxtec.com](https://www.roxtec.com).

Pre-configured transit kits

mm/kg

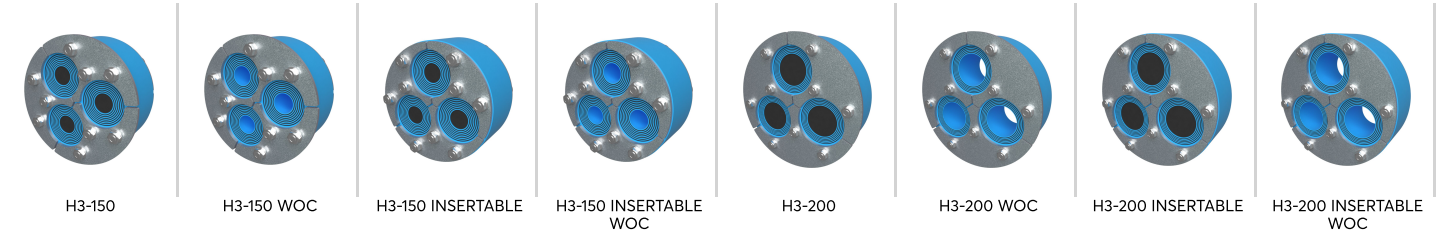

| Product | Configuration | Aperture dimensions Ø | Weight | Art. no |
|-----------------------|----------------|--------------------------|--------|---------|
| H3-150 | 3x (24.0-54.0) | 150 - 152 | 2.8 | 122905 |
| H3-150 WOC | 3x (24.0-54.0) | 150 - 152 | 2.8 | 122906 |
| H3-150 INSERTABLE | 3x (24.0-54.0) | 150 - 152 | 2.7 | 122907 |
| H3-150 INSERTABLE WOC | 3x (24.0-54.0) | 150 - 152 | 2.6 | 122908 |
| H3-200 | 3x (48.0-70.0) | 200 - 202 | 4.8 | 122909 |
| H3-200 WOC | 3x (48.0-70.0) | 200 - 202 | 4.4 | 122910 |
| H3-200 INSERTABLE | 3x (48.0-70.0) | 200 - 202 | 4.7 | 122911 |
| H3-200 INSERTABLE WOC | 3x (48.0-70.0) | 200 - 202 | 4.1 | 122912 |

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2024-04-30