



Bague Roxtec H3

Passage ouvrable pour étancher des câbles/tuyauteries existants.

Le Roxtec H3 est une solution d'étanchéité circulaire pour passages de câble et de tuyauterie qui s'insère dans des manchons métalliques ou des trous par carottage. La structure en plusieurs parties de la bague facilite l'installation autour de tuyauteries ou de câbles existants, ou de câbles disposés en trèfle. Le passage est doté de raccords en acier inoxydable résistants à l'acide et s'adapte à des câbles et tuyaux de différentes tailles. La bague est également proposée avec de plus petits raccords frontaux pour permettre l'insertion dans un trou.



- Résistant aux rongeurs
- Idéal pour la rénovation
- Installation facile et rapide

Caractéristiques du produit



Coupe-feu



Etanche à l'eau



Etanche au gaz



IP/UL NEMA

Structure d'installation



Métal



Béton

Type de fixation



Trou existant



Douille existante

Classements et certificats

Feu

- CLASSE A conformément au code FTP IMO 2010
- Classement E/El selon EN 13501

Étanchéité

- Gaz: 2,67 bars (catastrophique)
- Eau: 4 bars (catastrophique)
- IP 68

Eléments d'étanchéité

Eléments d'étanchéité



Bague H3




Lubrifiant Roxtec

Pour plus d'informations, veuillez consulter [roxtec.com](https://www.roxtec.com).



Kits de passage préconfigurés

mm/kg

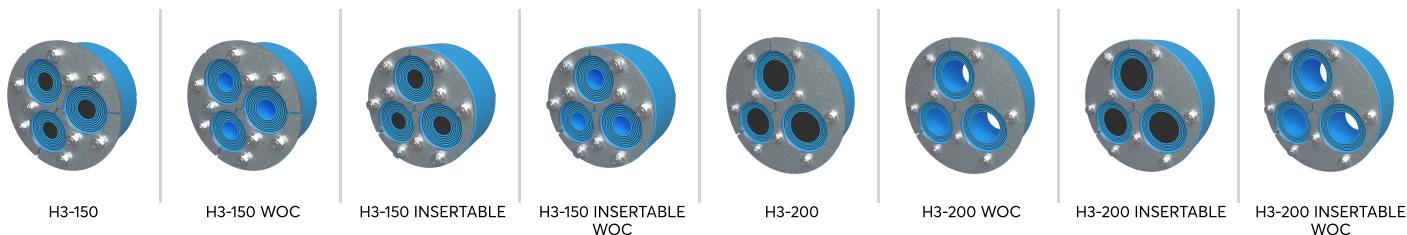

Titre	Configuration	Dimensions d'ouverture Ø	Poids	N° art.
H3-150	3x (24.0-54.0)	150 - 152	2.8	122905
H3-150 WOC	3x (24.0-54.0)	150 - 152	2.8	122906
H3-150 INSERTABLE	3x (24.0-54.0)	150 - 152	2.7	122907
H3-150 INSERTABLE WOC	3x (24.0-54.0)	150 - 152	2.6	122908
H3-200	3x (48.0-70.0)	200 - 202	4.8	122909
H3-200 WOC	3x (48.0-70.0)	200 - 202	4.4	122910
H3-200 INSERTABLE	3x (48.0-70.0)	200 - 202	4.7	122911
H3-200 INSERTABLE WOC	3x (48.0-70.0)	200 - 202	4.1	122912

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2024-04-06