



Roxtec H3-gjennomføring

Åpningsbar gjennomføring for tetting rundt eksisterende kabler/rør.

Roxtec H3 er en rund tetning for kabler og rør i metallhylser eller kjerneborede hull. Den delte konstruksjonen av tetningen forenkler monteringen rundt eksisterende kabler og rør, eller kabler i trekløverformasjon. Gjennomføringen har beslag av syrefast rustfritt stål og er tilpascningsdyktig til kabler og rør i forskjellige størrelser. Tetningen er også tilgjengelig med mindre frontbeslag for å muliggjøre innføring i et hull.



- Skadedyrbestandig
- Perfekt for ettermontering
- Rask og enkel å installere

Produktegenskaper



Brannklassifisert



Vannrett



Gasstett



IP/UL NEMA

Struktur for installasjon



Metall



Betong

Festetype



Eksisterende hull



Eksisterende hylse

Graderinger og sertifikater

Brann


- A-KLASSE i henhold til IMO 2010 FTP-kode
- E/EI-klassifisering i henhold til EN 13501

Tetthet

- Gass: 2,67 bar (katastrofalt)
- Vann: 4 bar (katastrofalt)
- IP 68

Tetningskomponentdata

Tetningskomponenter



H3-tetning




smøremiddel

For ytterligere informasjon, kan du besøke www.roxtec.com.



Forhåndskonfigurerte gjennomføringskit

mm/kg

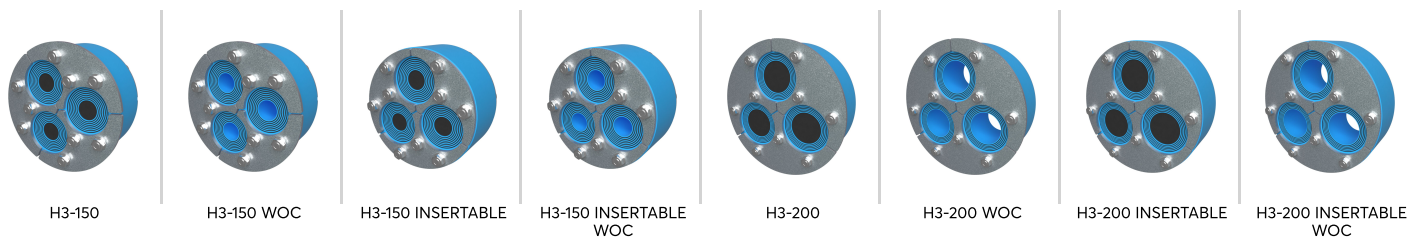

Tittel	Konfigurasjon	Utsparingsmål Ø	Vekt	Art.nr.
H3-150	3x (24.0-54.0)	150 - 152	2.8	122905
H3-150 WOC	3x (24.0-54.0)	150 - 152	2.8	122906
H3-150 INSERTABLE	3x (24.0-54.0)	150 - 152	2.7	122907
H3-150 INSERTABLE WOC	3x (24.0-54.0)	150 - 152	2.6	122908
H3-200	3x (48.0-70.0)	200 - 202	4.8	122909
H3-200 WOC	3x (48.0-70.0)	200 - 202	4.4	122910
H3-200 INSERTABLE	3x (48.0-70.0)	200 - 202	4.7	122911
H3-200 INSERTABLE WOC	3x (48.0-70.0)	200 - 202	4.1	122912

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2024-04-06