



# Passagem Ex Roxtec CF 8/32

Molduras de alumínio de alta densidade de cabo para compartimentos.

Roxtec CF 8 Ex e o CF 32 Ex são vedações de cabos e tubos com molduras de alumínio fundido. As vedações de passagem são para áreas Ex e Ex tb em temperaturas de -40 a 80 °C e podem ser utilizadas com cabos blindados que requerem equipotencialização e aterramento. Os módulos de vedação se adaptam a cabos e tubos de diferentes tamanhos.

- Resistente a roedores
- Leve
- Eficiente em área



## Características do produto



## Estrutura da instalação



## Classificações e certificados

### Proteção contra vazamento

- IP 66/67, UL/NEMA 4,4X,12,13

### Suporta

- Equipotencialização e aterramento
- Certificado Ex

## Dimensões da moldura


mm/kg

As variantes de molduras abaixo são uma seleção limitada. Para a gama completa de molduras e configurações, acesse [roxtec.com](https://www.roxtec.com).

Título	Aberturas da moldura	Espaço de montagem	Dimensões externas WxHxD	Dimensões da abertura w x h	Peso	Art. No.
CF 32 Ex	2	40 x 160	130 x 230 x 60	110(+0.5/-0.5) x 216(+0.5/-0.5)	1.2	EXCSF0000320035
CF 8 Ex	1	40 x 80	75 x 140 x 60	61(+0.5/-0.5) x 127(+0.5/-0.5)	0.44	EXCSF0000080035

## Dados de componente de vedação


### Componentes de vedação



Módulo CM Ex com Multidiameter™



Módulo de compensação sólida CM Ex



Módulo CM BG™ Ex com Multidiameter™




Lubrificante Roxtec

Para obter informações detalhadas, acesse [roxtec.com](https://www.roxtec.com).



## Kits de passagem pré-configurada

mm/kg

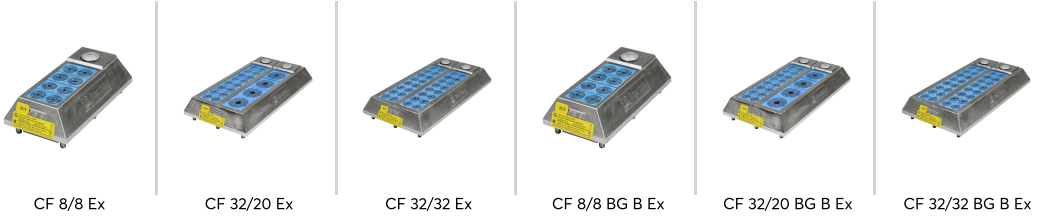

Título	Configuração	Dimensões externas WxHxD	Dimensões da abertura w x h	Peso	Art. No.
CF 8/8 Ex	8x (3.5-16.5)	75 x 140 x 59	61(+0.5/-0.5) x 127(+0.5/-0.5)	0.9	EXCKT80000008
CF 32/20 Ex	4x (9.5-32.5), 16x (3.5-16.5)	130 x 230 x 59	110(+0.5/-0.5) x 216(+0.5/-0.5)	2.2	EXCKT32000020
CF 32/32 Ex	32x (3.5-16.5)	130 x 230 x 59	110(+0.5/-0.5) x 216(+0.5/-0.5)	1.8	EXCKT32000032
CF 8/8 BG B Ex	8x (3.5-16.5)	75 x 140 x 59	61(+0.5/-0.5) x 127(+0.5/-0.5)	0.8	103591
CF 32/20 BG B Ex	4x (9.5-32.5), 16x (3.5-16.5)	130 x 230 x 59	110(+0.5/-0.5) x 216(+0.5/-0.5)	2.5	103736
CF 32/32 BG B Ex	32x (3.5-16.5)	130 x 230 x 59	110(+0.5/-0.5) x 216(+0.5/-0.5)	2.4	103737

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2024-04-18