




Roxtec SBTB EMC 穿隔系统

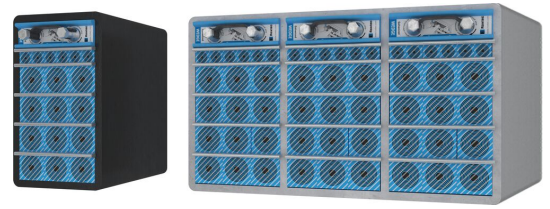

带金属框架的 EMC 穿隔系统可提供额外的防火保护。

Roxtec R SBTB 是一种双侧电缆和管道穿隔系统，用于确保实现电磁兼容性以及高防火等级。其金属框架焊接到结构上。有提供电磁屏蔽的 Roxtec ES 模块与防止传导干扰的 PE 模块可供选择。使用 Roxtec EC 检测条来测试 Roxtec BG™ 或 ES 电缆穿隔系统安装的电气性能。

- 具有内置备用容量

产品特性



耐火



水密



气密



EMI 保护

安装结构



金属

安装类型



焊接

等级和证书

火灾

- A 级符合 IMO 2010 FTP 规范
- H 级符合 IMO 2010 FTP 规范 + HC 火灾荷载曲线
- 喷射火符合 ISO 22899-1 和 OTI 95634 标准

密封性

- 气体: 2.5 bar 洪水
- 水: 4 bar 洪水

支持

- 电磁屏蔽
- 电位均衡

框架尺寸

mm/kg

下方的不同框架只是部分选择。要了解全部的框架和配置请访问 [roxtec.com](https://www.roxtec.com)。


标题	框架开口	密封空间	外部尺寸 WxHxD	开孔尺寸 w x h	重量	产品编号
SBTB 6x1 ALU	1	120 x 180	140.5 x 238 x 200	143(+1/-1) x 240(+1/-1)	4	105587
SBTB 6x2 ALU	2	120 x 180	271 x 238 x 200	273(+1/-1) x 240(+1/-1)	5.78	5SBT000007020
SBTB 6x3 ALU	3	120 x 180	401.5 x 238 x 200	404(+1/-1) x 240(+1/-1)	7.85	105588
SBTB 6x1 PRIMED	1	120 x 180	140.5 x 238 x 200	143(+1/-1) x 240(+1/-1)	10.5	5S00000004391
SBTB 6x2 PRIMED	2	120 x 180	271 x 238 x 200	273(+1/-1) x 240(+1/-1)	16.97	5S00000004503
SBTB 6x3 PRIMED	3	120 x 180	401.5 x 238 x 200	404(+1/-1) x 240(+1/-1)	22.3	5S00000004393
SBTB 6x1 AISI316	1	120 x 180	140.5 x 238 x 200	143(+1/-1) x 240(+1/-1)	10.85	5SBT000002149
SBTB 6x2 AISI316	2	120 x 180	271 x 238 x 200	273(+1/-1) x 240(+1/-1)	16.9	5SBT000004538
SBTB 6x3 AISI316	3	120 x 180	401.5 x 238 x 200	404(+1/-1) x 240(+1/-1)	22.8	5SBTB00010248



密封组件数据

密封组件

配件



RM PE 盲堵模块




楔形压紧件和楔形压紧套件
ES 型




ES 密封套件



隔层板



Multidiameter™ 多径 3
RM ES 模块




ES 和 BG 安装




焊接工具



润滑脂



RM ES 盲堵模块



Multidiameter™ 多径 3
RM PE 模块



楔形压紧件和楔形压紧套件



支架工具

如需了解详细信息请访问 [roxtec.com](https://www.roxtec.com)。

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for the intended process, installation and/or use.

Roxtec gives no guarantee for the Roxtec system or any part thereof and assumes no liability for any loss or damage whatsoever, whether direct, indirect, consequential, loss of profit or otherwise, occurred or caused by the Roxtec systems or installations containing components not manufactured by an authorized manufacturer and/or occurred or caused by the use of the Roxtec system in a manner or for an application other than for which the Roxtec system was designed or intended.

Roxtec expressly excludes any implied warranties of merchantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect, consequential, punitive, special, exemplary or incidental damages or losses.

The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from <https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/>

We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright.

This document was generated on: 2026-05-19



Roxtec ® and Multidiameter ® are registered trademarks of Roxtec in Sweden and/or other countries.