



Roxtec SF EMC transit

Transit for EMC with metal frame and flange for welding.

The Roxtec SF EMC is a cable and pipe transit ensuring electromagnetic compatibility. The transit frame is available in different materials and with a single or various combinations of openings. The frame is produced in 10mm thick metal and has a flange to simplify welding to imprecise holes. There is a choice between Roxtec ES modules for electromagnetic shielding and PE modules that protect against conducted disturbances. The modules adapt to cables and pipes of different sizes and can be used to build in spare capacity in the seal. Roxtec EC (electrical continuity) test sticks are available to help indicate the electrical performance of the transit installation.

- Easy to maintain and inspect
- Provides built-in spare capacity

Product characteristics







IP/UL NEMA

Weight Art. no

Mounting type

Welding



EMI protection

Structure of installation

Metal

Ratings & certificates

Fire

- A-CLASS according to IMO 2010 FTP Code
- H-CLASS according to IMO 2010 FTP Code + HC fire load curve
- Jet fire according to ISO 22899-1 and OTI 95634

Tightness

- Gas: 2.5 bar (catastrophic)
- Water: 4 bar (catastrophic)

Packing space

IP 66/67

Supports

- Electromagnetic shielding
- Potential equalization

Aperture dimensions


Frame dimensions

Product

mm/kg

The frame variants below are a limited selection. For the full range of frames and configurations, please visit roxtec.com.

Frame openings




H	- SF 6x1 ALU	1	120 x 180	WxHxD 260.5 x 358 x 60	w x h 201(+15/-15) x 298(+15/-15)	2.9	SFF6000000131	
	SF 6x2 ALU	2	120 x 180	391 x 358 x 60	332(+15/-15) x 298(+15/-15)	4.2	SFF600000231	
	SF 6x3 ALU	3	120 x 180	521.5 x 358 x 60	462(+15/-15) x 298(+15/-15)	6	SFF6000000331	
	SF 6x1 PRIMED	1	120 x 180	260.5 x 358 x 60	201(+15/-15) x 298(+15/-15)	7.6	SFF6000000112	
	SF 6x2 PRIMED	2	120 × 180	391 x 358 x 60	332(+15/-15) x 298(+15/-15)	12	SFF6000000212	
	SF 6x3 PRIMED	3	120 x 180	521.5 x 358 x 60	462(+15/-15) x 298(+15/-15)	16.4	SFF6000000312	
	SF 6x1 AISI316	1	120 x 180	260.5 x 358 x 60	201(+15/-15) x 298(+15/-15)	8.2	SFF6000000121	
	SF 6x2 AISI316	2	120 x 180	391 x 358 x 60	332(+15/-15) x 298(+15/-15)	12.2	SFF6000000221	_
	SF 6x3 AISI316	3	120 x 180	521.5 x 358 x 60	462(+15/-15) x 298(+15/-15)	16.6	SFF6000000321	_

External dimensions





Sealing components

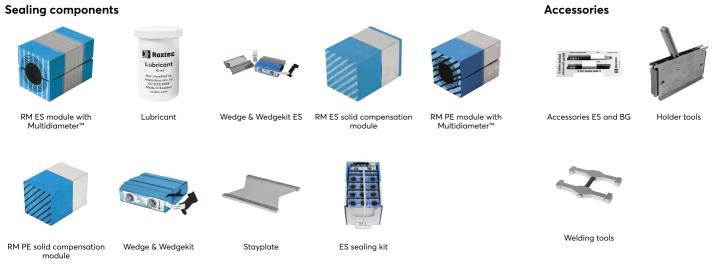

For detailed information, please visit roxtec.com.

The product information provided by Roxtec does not release the purchaser of the Roxtec system, or part thereof, from the obligation to independently determine the suitability of the products for

Roxtec expressly excludes any implied warranties of mechantability and fitness for a particular purpose and all other express or implied representations and warranties provided by statute or

common law. User determines suitability of the Roxtec system for intended use and assumes all risk and liability in connection therewith. In no event shall Roxtec be liable for indirect,

consequential, punitive, special, exemplary or incidental damages or losses. The Roxtec products are offered and sold in accordance with the conditions of the Roxtec General Terms of Sales. The latest version of the Roxtec General Terms of Sales can be downloaded from

https://www.roxtec.com/en/about-us/about-roxtec/general-terms-of-sales/ We reserve the right to make changes to the product and technical information without further notice. Any errors in print or entry are no claims for indemnity. The content of this publication is the property of Roxtec International AB and is protected by copyright. This document was generated on: 2024-04-27